


## Earthing Strip

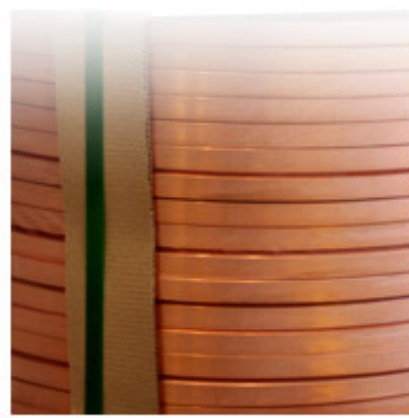

Item	Specification
Copper content	99.95 % Minimum
Common sizes	25.0 X 3.0 mm 50.0 X 6.0 mm
Condition	Soft
Tolerance on dimensions & Corner radius	As per BS EN 13601:2002 or equivalent
Electrical conductivity (IACS @ 20° C)	100 % Minimum
Elongation at fracture (50 mm gauge length)	35 % Minimum
Surface condition	Clean, smooth and bright
Brand / Stamping on surface	Metrod
Packaging	In pancake form, duly stretch filmed and palletised on wooden pallet
Coil weight	45 – 70 Kgs / pancake and 1 MT per pallet
Special requirements / other sizes	On mutual agreement