




LE115 HIGH EFFICIENCY ENERGY CONSERVING EMERGENCY LIGHTING LUMINAIRE

Technical Data

Mode of Operation	: Non-Maintained.
Input Voltage	: 240V \pm 10%, 50Hz
Battery	: Hi-Temp. Nickel Cadmium Battery.
Charging Current	: 100mA (Nominal).
Lamp Used	: 2.5Watt SMD LED
Operating Temperature	: 0°C to 60°C
Charger	: Fully Automatic Constant Current. Solid-State Electronics Provide High Reliability with Trickle Charge-Facility.
Indication	: Red L.E.D. "On" Indicates Charging. Equipped with Push Test-Switch to Simulate Power Failure.
Backup Time	: 3 Hours Duration.
Construction	: Injection Moulded Fire-Retardant ABS Polyester Base with Side Knockout Cable Entry. Injection Moulded Fire-Retardant Polycarbonate Gear Tray and Acrylic Diffuser.
#Weight	: \pm 0.2kg
Warranty	: 5 Years.
Compliance	: Malaysia Standards MS-619, IP-20.

Dimension in mm
Tolerance: \pm 0.03 mm

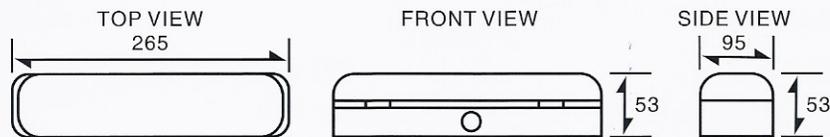

Optional : Recessed Frame

