



PR-213 & PR-213 R

SLIMLINE DESIGN FOR ELEGANT LOOK


SELF-CONTAINED
EMERGENCY KELUAR SIGN

Technical Data

Mode of Operation	: Sustained.
Input Voltage	: 240V±10%, 50Hz
Battery	: Hi-Temp. Nickel Cadmium Battery.
Charging Current	: 300mA (Nominal).
Lamp Used	: 2 x 13 Watt Fluorescent Tubes.
Operating Temperature	: 0°C to 60°C
Charger	: Fully Automatic Constant Current. Solid-State Electronics Provide High Reliability with Trickle Charge-Facility.
Indication	: Red L.E.D. "On" Indicates Charging. Equipped with Push Test-Switch to Simulate Power Failure.
Backup Time	: 3 Hours Duration.
Construction	: Electro-Galvanised Steel Casing of High Reflectance Finished with Corrosion Resistant Epoxy Spray Coating.
Weight	: PR-213 ∓ 2.6kg / PR-213 R ∓ 2.9kg
#Warranty	: 5 Years.
Compliance	: Malaysia Standards MS-983, IP-20.

Dimension in mm
Tolerance: ± 0.03 mm

Wall Mounting

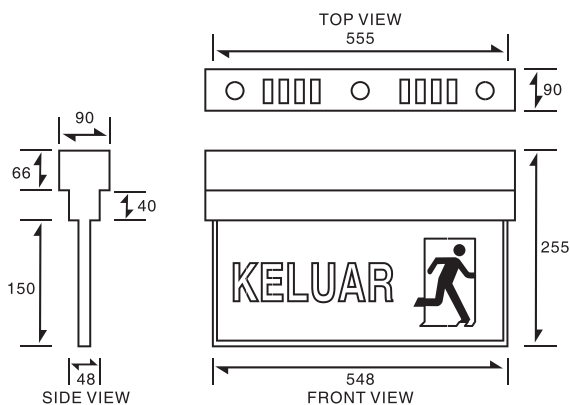

Recessed Mounting

