

CABLE CLEATS



Redefining Supply
AN ISO 9001 & 14001
Company

**COMING SOON!
NEW ECO-GREEN
CABLE CLEAT**

Our cable cleats are manufactured to meet the international standard IEC 61914:2015 standard. It also complies to ROHS 2 which is free from lead and other banned toxic chemicals. It is also fabricated using low-smoke zero-halogen (LSZH) compounds that provide many advantages and protection over other cable cleats.

Our highly engineered polymers developed after years of research has produced a new breed of cable cleats that offer excellent electrical and mechanical characteristics, superior flame resistance, low smoke production and reduced toxicity.

These cable cleats are ideal for use in environments where high-performance, reliability and safety are required. Best of all, the applications for our cable cleats are virtually endless. The advantages of this product make it an excellent candidate for use in a broad range of application.




Aluminium Single Cable Cleats
(Colored and Natural Finish)

- Chemical/Corrosion resistant.
- UL-94 flame class, V0, V1 & V2 Class
- No Sharp Corners
- High impact resistance
- Halogen-free (LSZH)
- Do not Oxidize (UV Resistance)
- No Magnetism
- Anti -Termite and Rodent
- ROHS 2 Compliant

Eco-Labeling:

- Restricted Hazardous Substances
- Restricted Toxic Substances
- Recycled Content Materials
- Reduced Energy Consumption
- Reduced Air Pollution
- Waste Reduction

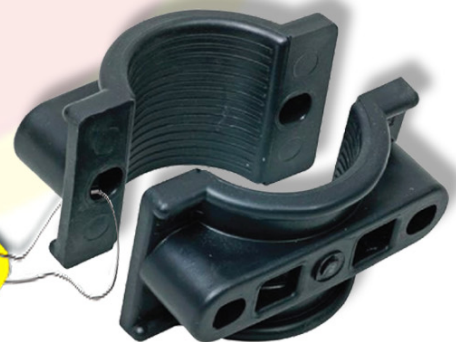

Two Hole Non-Metallic
Single Cable Cleats

CABLE CLEATS



Redefining Supply
AN ISO 9001 & 14001
Company

Size Available For Aluminium Alloy

ITEM CODE	CABLE DIA. (mm)
DSSB-CC-SAC1827	18 – 27
DSSB-CC-SAC2838	28 – 38
DSSB-CC-SAC3953	39 – 53
DSSB-CC-SAC5468	54 – 68
DSSB-CC-SAC6682	66 – 82
DSSB-CC-SAC83103	83 – 103
DSSB-CC-SAC100114	100 – 114
DSSB-CC-SAC115138	115 – 138

SINGLE CABLE CLEATS (Aluminium)



ISOMETRIC VIEW (3D)

Note: Please Contact Us For Special Sizes




SINGLE CABLE CLEATS (Non-metallic)

Size Available For Two Holes Non-Metallic Cable Cleats

ITEM CODE	CABLE DIA. (mm)	INDOOR	OUTDOOR (UV RESISTANCE)
DSSB-CC-SNC1827	18 – 27	✓	✓
DSSB-CC-SNC2842	28 – 42	✓	✓
DSSB-CC-SNC4356	43 – 56	✓	✓
DSSB-CC-SNC5476	54 – 76	✓	✓
DSSB-CC-SNC7488	74 – 88	✓	✓
DSSB-CC-SNC87102	87 – 102	✓	✓
DSSB-CC-SNC103116	103 – 116	✓	✓
DSSB-CC-SNC117138	117 – 138	✓	✓

Note: Please Contact Us For Special Sizes

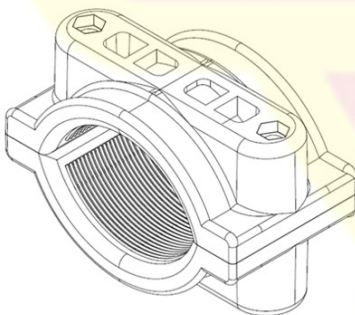

ISOMETRIC VIEW (3D)



CABLE CLEATS

Size Available For (Aluminium)

ITEM CODE	CABLE DIA. (mm)
DSSB-CC-TAC32	29 – 32
DSSB-CC-TAC36	33 – 36
DSSB-CC-TAC40	37 – 40
DSSB-CC-TAC44	41 – 44
DSSB-CC-TAC47	45 – 47
DSSB-CC-TAC50	48 – 50
DSSB-CC-TAC53	51 – 53
DSSB-CC-TAC55	54 – 55
DSSB-CC-TAC60	56 – 60
DSSB-CC-TAC63	61 – 63
DSSB-CC-TAC67	64 – 66
DSSB-CC-TAC70	67 – 70
DSSB-CC-TAC73	71 – 73
DSSB-CC-TAC77	74 – 77
DSSB-CC-TAC81	78 – 81
DSSB-CC-TAC85	82 – 85
DSSB-CC-TAC90	86 – 90
DSSB-CC-TAC93	91 – 93
DSSB-CC-TAC96	94 – 96
DSSB-CC-TAC99	97 – 99
DSSB-CC-TAC102	100 – 102
DSSB-CC-TAC105	103 – 105
DSSB-CC-TAC109	106 – 109
DSSB-CC-TAC112	110 – 112


Note: Please Contact Us For Special Sizes

Size Available For (Non-Metallic)

ITEM CODE	CABLE DIA. (mm)	INDOOR	OUTDOOR (UV RESISTANT)
DSSB-CC-TNC33	31 – 33	✓	✓
DSSB-CC-TNC36	34 – 36	✓	✓
DSSB-CC-TNC40	37 – 40	✓	✓
DSSB-CC-TNC44	41 – 44	✓	✓
DSSB-CC-TNC47	45 – 47	✓	✓
DSSB-CC-TNC50	48 – 50	✓	✓
DSSB-CC-TNC53	51 – 53	✓	✓
DSSB-CC-TNC55	54 – 55	✓	✓
DSSB-CC-TNC60	56 – 57	✓	✓
DSSB-CC-TNC63	58 – 60	✓	✓
DSSB-CC-TNC65	63 – 65	✓	✓
DSSB-CC-TNC67	64 – 67	✓	✓
DSSB-CC-TNC70	68 – 70	✓	✓
DSSB-CC-TNC73	71 – 73	✓	✓
DSSB-CC-TNC77	74 – 77	✓	✓
DSSB-CC-TNC81	78 – 81	✓	✓
DSSB-CC-TNC85	82 – 85	✓	✓
DSSB-CC-TNC90	86 – 90	✓	✓
DSSB-CC-TNC93	91 – 93	✓	✓
DSSB-CC-TNC96	94 – 96	✓	✓
DSSB-CC-TNC99	97 – 99	✓	✓
DSSB-CC-TNC102	100 – 102	✓	✓
DSSB-CC-TNC105	103 – 105	✓	✓
DSSB-CC-TNC109	106 – 109	✓	✓
DSSB-CC-TNC112	110 – 112	✓	✓

Note: Please Contact Us For Special Sizes

TREFOIL CABLE CLEATS

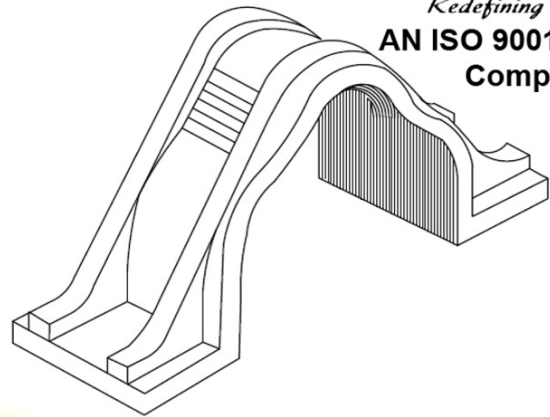

ISOMETRIC VIEW (3D)



Aluminium Trefoil Cable Cleat
Lahat Datu POIC 132kV Substation



Non-Metallic Trefoil Cable Cleat
Silibin 132kV Substation



Redefining Supply
AN ISO 9001 & 14001
Company

CABLE CLEATS




Redefining Supply
AN ISO 9001 & 14001
Company

Size Available For Hot Dipped Galvanized

ITEM CODE	CABLE DIA. (mm)
DSSB-CC-THC32	29-32
DSSB-CC-THC36	33-36
DSSB-CC-THC40	37-40
DSSB-CC-THC44	41-44
DSSB-CC-THC47	45-47
DSSB-CC-THC50	48-50
DSSB-CC-THC53	51-53
DSSB-CC-THC55	54-55
DSSB-CC-THC60	56-60
DSSB-CC-THC63	61-63
DSSB-CC-THC67	64-67
DSSB-CC-THC70	68-70

Note: Please Contact Us For Special Sizes

TREFOIL HDG CABLE CLEATS (HOT DIPPED GALVANISED)

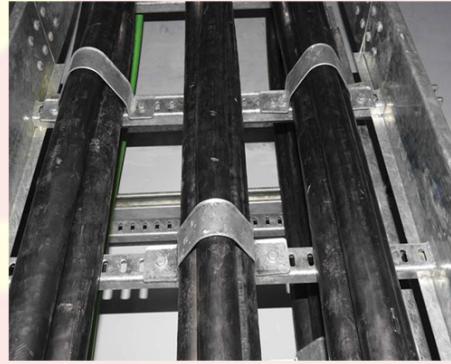

Size Available For Hot Dipped Galvanized

ITEM CODE	CABLE DIA. (mm)
DSSB-CC-HSC73	71-73
DSSB-CC-HSC77	74-77
DSSB-CC-HSC81	78-81
DSSB-CC-HSC85	82-85
DSSB-CC-HSC90	86-90
DSSB-CC-HSC93	91-93
DSSB-CC-HSC96	94-96
DSSB-CC-HSC99	97-99
DSSB-CC-HSC102	100-102
DSSB-CC-HSC105	103-105
DSSB-CC-HSC109	106-109
DSSB-CC-HSC112	110-112

Note: Please Contact Us For Special Sizes

SINGLE HDG CABLE CLEATS (HOT DIPPED GALVANISED)



CABLE CLEATS



Redefining Supply
AN ISO 9001 & 14001
Company

TREFOIL BASE (NON-METALLIC)

Size Available For Trefoil Base

ITEM CODE	TREFOIL SIZE	MATERIAL
DSSB-CC-TB2849	28 – 49	PLASTIC
DSSB-CC-TB3647	36 – 47	FR
DSSB-CC-TB5070	50 – 70	PLASTIC
DSSB-CC-TB87102	87 – 102	PLASTIC

* FR = Fibreglass Reinforced

Note: Please Contact Us For Special Sizes




28-49




36-47



50-70



87-102

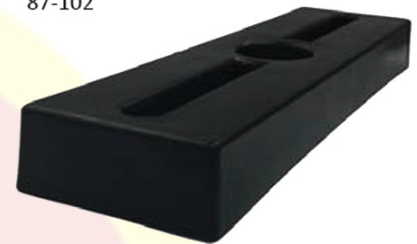

ACCESSORIES

POLE ADAPTER FOR CABLE CLEAT

ITEM CODE
DSSB-CC-PA



TEST RESULT



Standard:

1. IEC 61914:2015
2. BS EN 50368:2009
3. ROHS 2
4. ASTM D2843
5. ASTM 1252

APPROVED BY: MRT, LRT, TNB, SEB, Etc