


ALUMINIUM ALLOY DIE CASTING CONDUIT FITTINGS
ACCESSORIES

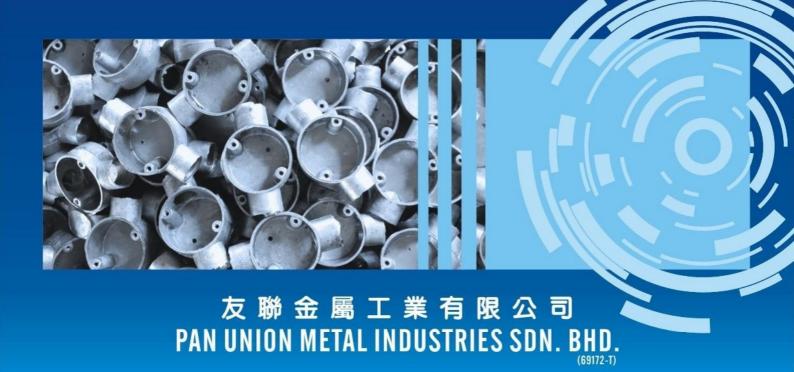

PUM

LOOPING BOX (PLAIN)

LOOPING BOX (1 HOLE) LOOPING BOX (2 HOLE) LOOPING BOX (3 HOLE) LOOPING BOX (4 HOLE)











MATERIAL: ALUMINIUM ALLOY

INTERNAL DIMENSION	59mm x 29.5mm deep
FIXING CENTRE	50.5mm tapped 2BA or 5/32" with tapped hole in base for earthing screw

EXTENSION RING

MATERIAL: ALUMINIUM ALLOY

INTERNAL DIMENSION	57.5mm x 31mm deep
FIXING CENTRE	50.5mm tapped 2BA or 5/32" with tapped hole in base for earthing screw

LID COVER



MATERIAL: GALVANISED STEEL

AVAILABLE SIZES(Inch)	3/4"	1"	1¼"	1½"	2"
-----------------------	------	----	-----	-----	----



PUM

TERMINAL BOX (ONE WAY)



THROUGH BOX (TWO WAYS)













MATERIAL : ALUMINIUM ALLOY

INTERNAL DIMENSION	57.5mm x 23mm deep						
AVAILABLE SIZES(Inch)	3/4" 1" 11/4" 11/2" 2"						
AVAILABLE SIZES(mm)	20mm	25mm					

INSPECTION ELBOW

INSPECTION BEND

INSPECTION TEE







MATERIAL : ALUMINIUM ALLOY

*COMPLETE WITH: COVER AND SCREWS (5/32" x 1/4")

AVAILABLE SIZES(Inch)	3/411	1"	14"	1½"	2"
AVAILABLE SIZES(mm)	20mm	25mm			

Notes: Optional Item

Aluminium Alloy Die-Casting Conduit Fitting Accessories without thread for sizes 3/4" & 1" are available on request

FLEX TUBING ADAPTOR











MATERIAL : ALUMINIUM ALLOY

*COMPLETE WITH: SCREWS (5/32" X 1/4")

AVAILABLE SIZES(Inch)	1/2" X 3/4"	5/8" X 3/4"	3/ ₄ " X 3/ ₄ "	³⁄₄" X 1"	1" x 1"	1¼"x 1¼"	1½"x 1½"	2" x 2"
AVAILABLE SIZES(mm)	20m	m x 19mn	1					

SADDLE BAR



PUM

MATERIAL: GALVANISED STEE

AVAILABLE SIZES(Inch)	3/4"	1"	11/4"	1½"	

HALF SADDLE



MATERIAL: GALVANISED STEE

AVAILABLE SIZES(Inch)	3/4"	1"	11/4"	11/2"	
-----------------------	------	----	-------	-------	--

BALL & SOCKET



MATERIAL: ALUMINIUM ALLOY

AVAILABLE SIZES(Inch)	3/4"				
-----------------------	------	--	--	--	--

LOCK NUT



MATERIAL: ALUMINIUM ALLOY

AVAILABLE SIZES(Inch)	3/411	1"	14"	1½"	2"
AVAILABLE SIZES(mm)	20mm	25mm			

SCREW REDUCER



MATERIAL: ALUMINIUM ALLOY

AVAILABLE SIZES(Inch)	³/₄" X 1"	³ / ₄ " X 1 1/ ₄ "	³⁄₄" x 1 ½"	1"x 1¼"	1"x 1½"
	1¼"x 1½"	³/4" X 2"	1¼"x 2"	1½"x 2"	1"x 2"
AVAILABLE SIZES(mm)	20mm x 25mm				

CONDUIT SOCKET



MATERIAL : ALUMINIUM ALLOY

AVAILABLE SIZES(Inch)	3/4"	1"		
AVAILABLE SIZES(mm)	20mm	25mm		

DOME COVER



MATERIAL: ALUMINIUM ALLOY

AVAILABLE SIZES(Inch)	3/4"	1"		
AVAILABLE SIZES(mm)	20mm	25mm		

PUM









Over a period of 20 years in die casting manufacturing field. **Pan Union Metal Industries Sdn. Bhd.** has designed and manufactured a variety flow application systems to meet our customer need.

Pan Union Metal Industrial Sdn. Bhd. is one of the pioneers in conduit fitting accessories manufacturing. Beside that we also accept sub contract job or OEM basis in aluminium alloy and zinc alloy die casting.

Currently our die casting machine load ranging from 80ton, 125ton, 135ton, 250ton and 350ton to fulfils customer request. All works and services are provided by experienced, well trained team to meet with your specific requirement.

Here is some of the advantage of aluminum pressure die casting:

- *Consistent quality over high volumes
- *Tight tolerance achieved as cast
- *Long life of the die mould
- *Cost-effective high volume production
- *Part consolidation eliminates operations
- *Minimal draft angles on internal features
- *The unit price is cheaper

Customer Services

Customer service philosophy can be summed up in two words, "Service & Quality". We are dedicated to service the needs of our customers. We believe there s no substitute for direct personal communication. Our teams understand our customers service needs and product requirements. We offer great quality product and we aggressively pursue faster and more efficient techniques to improve the cost and quality of those products.

ALUMINIUM ALLOY CONDUIT FITTINGS ACCESSORIES

FEATURES

1. Light Weight : Rigid Aluminium Conduit is approximately one third weight of the steel

2. Corrosion Resistant: Aluminium Resists most corrosive atmospheres in industrial environments

(corrosion, moisture, and physical damage.)

3. **Easy to Install** : Aluminium conduit can be easily cut, bent and threaded without special tools.

4. Low Maintenance : Aluminium conduit does not corrode or leave discoloring streaks and stains.

5. **Non - Sparking** : Aluminium conduit is non-sparking, eliminating a hazard in explosive atmospheres.

6. Non - Magnetic : Aluminium conduit reduces power loss due to voltage drop, resulting in power savings

throughout the life of installation.

By alloying **ALUMINIUM** with small percentage of other metals, it achieves very high strength allowing it to be used in many structural application.

Thus, ALUMINIUM ALLOY DIE-CASTING CONDUIT FITTING

Accessories threaded & made compatible to BS 31 (Imperial) & 4568 (Metric) are recommended as a replacement & substitution for Galvanized Iron Products.

欲了解產品詳情[,]敬請聯絡:-For further product enquires, please contact :-

友聯全屬工業有限公司 PAN UNION METAL INDUSTRIES SDN. BHD.

(69192-T

Lot. 74278, PINJI INDUSTRIAL ESTATE, JALAN SIMPANG PULAI, [OPPOSITE SEKOLAH MENENGAH POI LAM (SUWA)] 31500 LAHAT, PERAK DARUL RIDZUAN, MALAYSIA.

TEL: 05-3219662, 3226681 FAX: 05-3218617

E-mail: pumipoh@gmail.com



