



Steel Surface Cable Trunking
Steel Perforated Cable Tray
Steel Cable Ladder

■ ULI™ Steel Surface Cable Trunking

Type: UL/TG/ST 4

■ ULI™ Steel Perforated Cable Tray

Type: UL/TU/ST 13

Type: UL/TT/ST or UL/TC/ST 22

Type: UL/TR/ST 34

■ ULI™ Steel Cable Ladder

Type: UL/LZ/ST 53

Type: UL/LN/ST 77

Type: UL/LG/ST 101

Type: UL/LC/ST 125

Company Background



History

Since its modest beginning in 1983, United U-LI Corporation has developed into a prominent and respected supplier of cable management and structural support systems in the ASEAN region.

In April 2002, the company was listed in the Kuala Lumpur Stock Exchange, thus, being the first company in the cable support industry in Malaysia to do so.

Where we are

Located in Balakong, Selangor, the three-acre factory is well-equipped with state-of-the-art machinery to provide guaranteed internationally approved products to customers. Operating through its sales office in Selangor, Johor Bahru and agents in Singapore, the company is now able to provide sales and technical services throughout the ASEAN region.

What we do


United U-LI is the leading manufacturer of cable support systems in Malaysia. We specialize in the design and manufacturing of a wide range of cable support systems. Our products are designed and manufactured under the Quality Systems that complies with the ISO 9001:2000 and Sirim Quality System. United U-LI's cable support system also meets the required International Standards such as BS4678, SS249:1998 and NEMA-VE1.

Projects

Over the years, products manufactured by United U-LI have been widely used in the various sectors of economics such as International Airports, Petrochemical, Waterworks, Commercial Buildings, Power Plants and Railway transport systems. Being a reputed company and a reliable supplier is further manifested by the ability to supply to International companies such as Alstom Pacific, Alstom UK, Bechtel US, ABB, Siemens, Sime Darby Group and many others.

Steel Surface Cable Trunking

U-LI™ range of Steel Surface Cable Trunking, Cable Ducting and Accessories

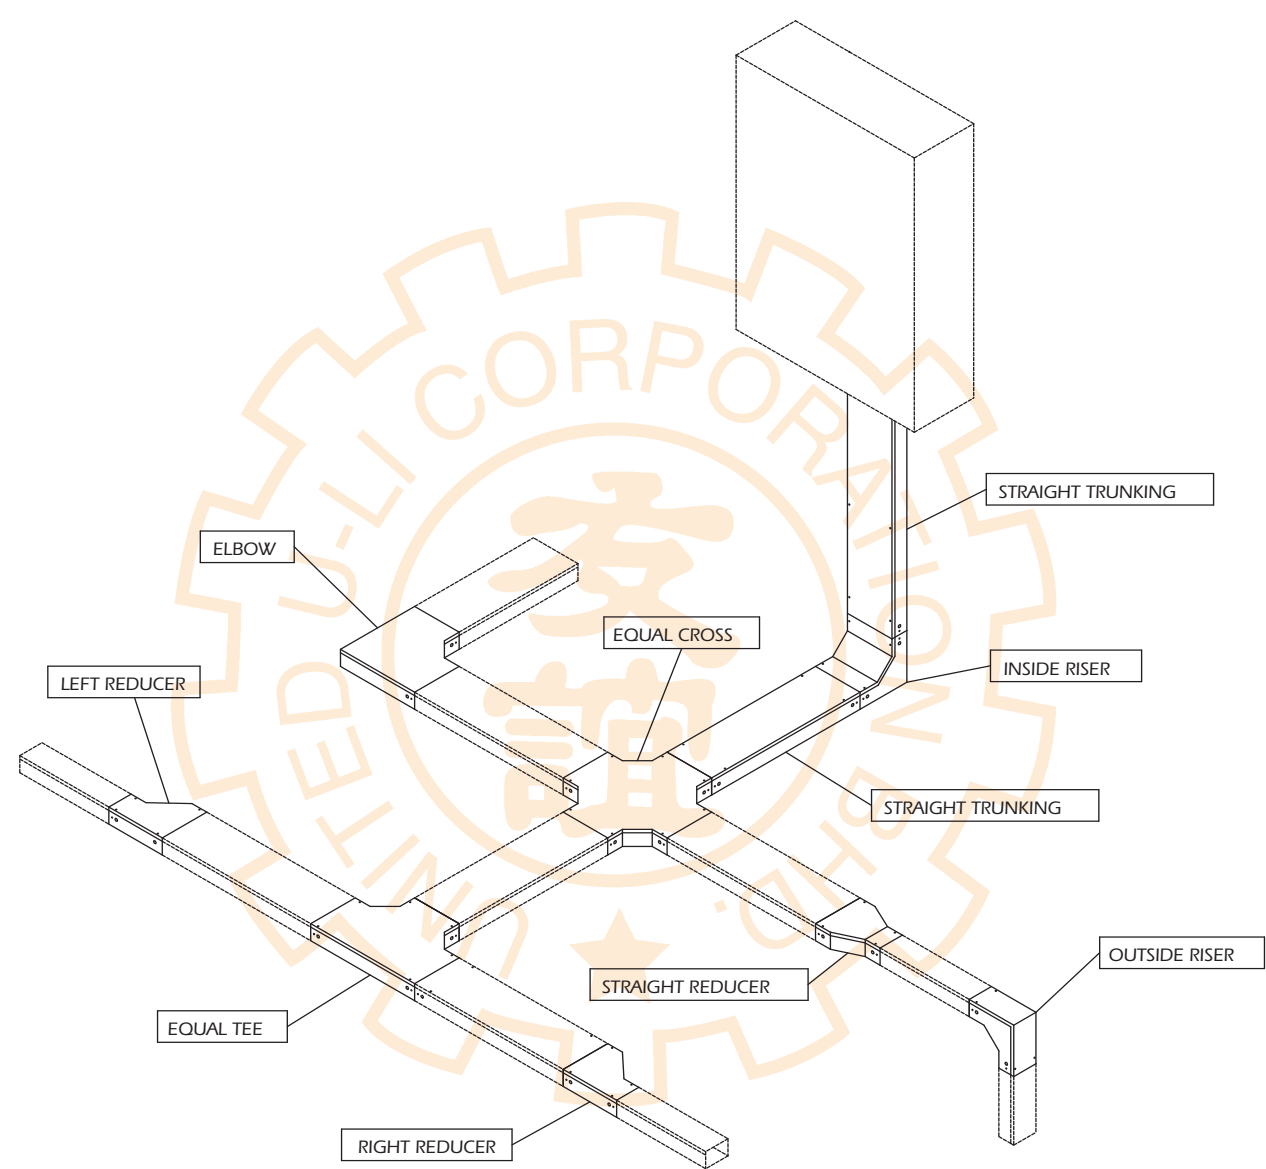


Steel Surface Cable Trunking-Straight



Type: UL/TG/ST

United U-LI Steel Surface Cable Trunking and Accessories are Certified to SS 249:1981 (Part BS 4678) by SIRIM QAS International Sdn Bhd
CERTIFICATION No: Pu 010901

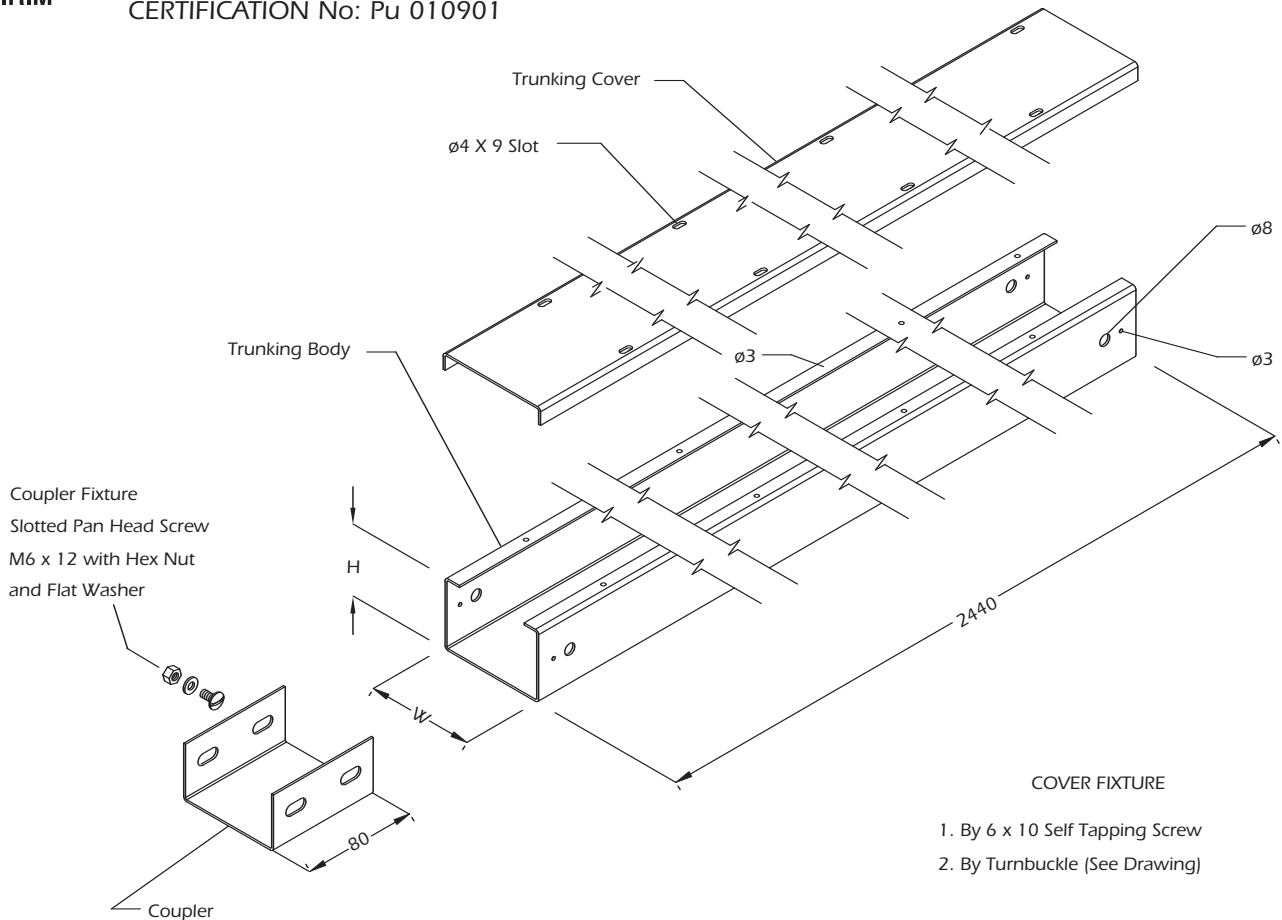

COVER FIXTURE

1. By 6 x 10 Self Tapping Screw
2. By Turnbuckle (See Drawing)

TYPE 1	SPECIFICATION	CLASSIFICATION	PROTECTION	MATERIAL COATING	FINISH (BOTH SIDES)
Manufactured to SS 249 : 1981	SS 249:1981	Class 1	Medium	Electro Galvanised to BS 1706/Zn 2	Epoxy Powder Coated
	SS 249:1981	Class 2	Heavy	Pre-Galvanised to BS 2989. Grade Z 275	Epoxy Powder Coated

TYPE 2	SPECIFICATION	CLASSIFICATION	PROTECTION	MATERIAL COATING	FINISH
Manufactured to BS 4678: Part 1:1971	BS 4678:Pt1:1971	Class 1	Light	Electro Galvanised to BS 1706/Zn 2	None
	BS 4678:Pt1:1971	Class 2	Medium	Electro Galvanised to BS 1706/Zn 2	Light Epoxy Coating Externally Only
	BS 4678:Pt1:1971	Class 3	Heavy	Pre-Galvanised to BS 2989. Grade Z 275	None

TYPE 3	SPECIFICATION	PROTECTION	MATERIAL	FINISH
Manufactured to high corrosion resistance	Hot Dip Galvanised to BS EN ISO 1461:1999(E)	Very Heavy	Hot Roll Steel to JISG 3131 SPHC	Hot Dip Galvanised or with Epoxy/Polyester Coat over it upon request

TYPE 4	SPECIFICATION	PROTECTION	MATERIAL	FINISH
Manufactured to very high corrosion resistance & strength	Stainless Steel	Extra Heavy and Heavy Duty	Stainless Steel AISI 304, 316 or 316L	None or with Epoxy/Polyester Coat over it upon request

Dimension in Millimetre

Steel Surface Cable Trunking

Standard Sizes For Type 1 and 2

Components Ref.	Nominal Size (mm) H (Height) x W (Width)	Nominal Thickness Of Body Material (mm)	Nominal Thickness Of Cover Material (mm)
UL/TG/ST - 1 / 2	25 X 50	1.0	1.0
UL/TG/ST - 2 / 2	50 X 50	1.0	1.0
UL/TG/ST - 2 / 3	50 X 75	1.2	1.2
UL/TG/ST - 3 / 3	75 X 75	1.2	1.2
UL/TG/ST - 2 / 4	50 X 100	1.2	1.2
UL/TG/ST - 3 / 4	75 X 100	1.2	1.2
UL/TG/ST - 4 / 4	100 X 100	1.4	1.2
UL/TG/ST - 2 / 5	50 X 125	1.4	1.2
UL/TG/ST - 2 / 6	50 X 150	1.4	1.2
UL/TG/ST - 3 / 6	75 X 150	1.4	1.2
UL/TG/ST - 4 / 6	100 X 150	1.4	1.2
UL/TG/ST - 6 / 6	150 X 150	1.4	1.2
UL/TG/ST - 2 / 7	50 X 175	1.4	1.2
UL/TG/ST - 4 / 7	100 X 175	1.4	1.4
UL/TG/ST - 2 / 8	50 X 200	1.6	1.4
UL/TG/ST - 3 / 8	75 X 200	1.6	1.4
UL/TG/ST - 4 / 8	100 X 200	1.6	1.4
UL/TG/ST - 6 / 8	150 X 200	1.6	1.4
UL/TG/ST - 2 / 9	50 X 225	1.6	1.4
UL/TG/ST - 2 / 10	50 X 250	1.6	1.4
UL/TG/ST - 2 / 11	50 X 275	1.6	1.4
UL/TG/ST - 2 / 12	50 X 300	1.6	1.4
UL/TG/ST - 3 / 12	75 X 300	1.6	1.4
UL/TG/ST - 4 / 12	100 X 300	1.6	1.4
UL/TG/ST - 2 / 14	50 X 350	1.6	1.4







Preferred length 2.44m, minimum 2m, maximum 3m.

The sizes, body, cover gauges and preferred lengths of trunking as indicated in the above table are specified under BS 4678:Part 1:1971 and SS 249:1981.

For other classification the above table could be use as a guide.

Steel Surface Cable Trunking


Cable Steel Trunking - Accessories

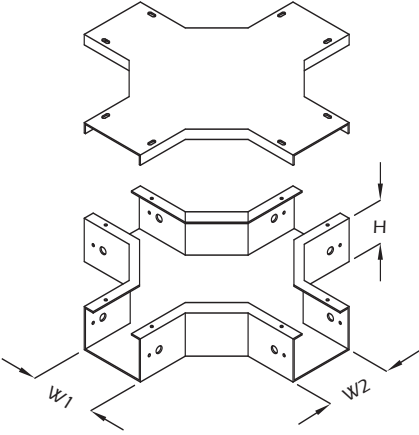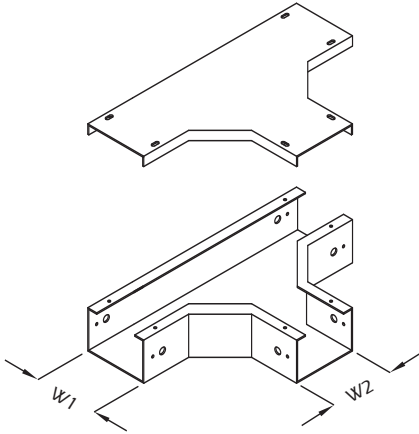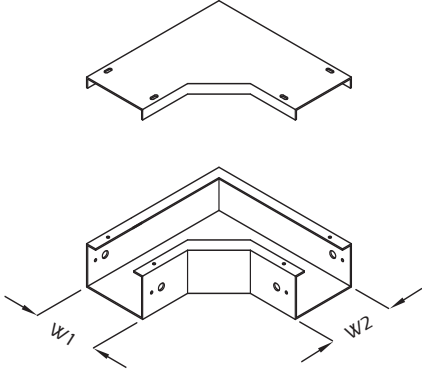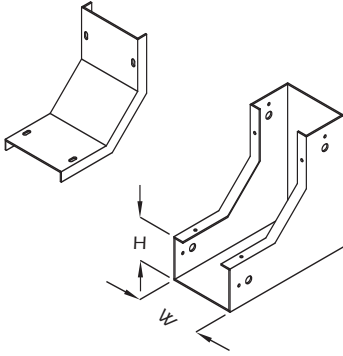 Horizontal Cross with Cover Type: UL/TG/A-1	 Horizontal Tee with Cover Type: UL/TG/A-2
 90° Horizontal Elbow with Cover Type: UL/TG/A-3	 45° Horizontal Elbow with Cover Type: UL/TG/A-4
 90° Internal Riser with Cover Type: UL/TG/A-5	 45° Internal Riser with Cover Type: UL/TG/A-6

When ordering please indicate W (width), H (height) and Finish.


Steel Surface Cable Trunking

Steel Surface Trunking - Accessories




90° External Riser with Cover

Type: UL/TG/A-7




45° External Riser with Cover

Type: UL/TG/A-8




90° Horizontal Offset with Cover
(right)

Type: UL/TG/A-9




90° Horizontal Offset with Cover
(left)

Type: UL/TG/A-10



45° Horizontal Offset with Cover
(right)

Type: UL/TG/A-11










45° Horizontal Offset with Cover
(left)

Type: UL/TG/A-12

When ordering please indicate W (width), H (height), A (length) and Finish.

Steel Surface Cable Trunking


Steel Surface Trunking - Accessories

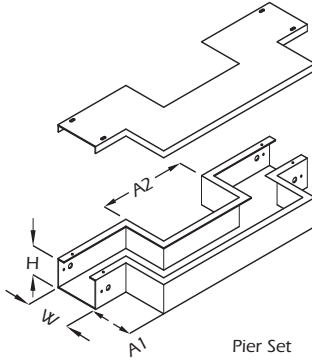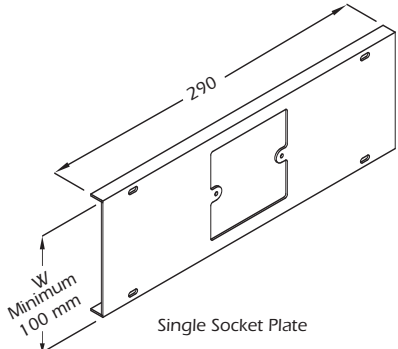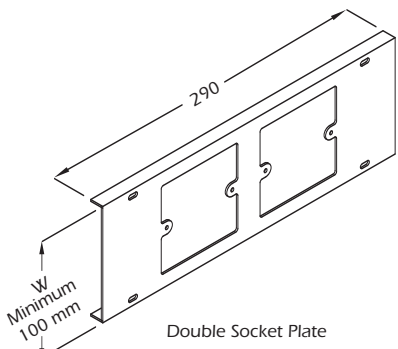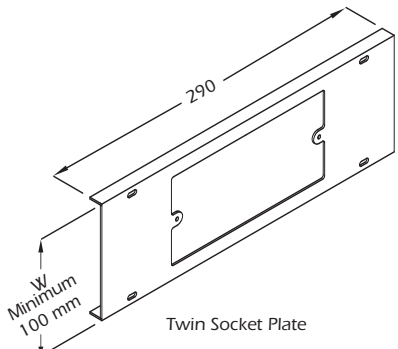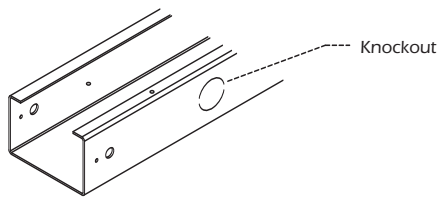 Straight Reducer with Cover Type: UL/TG/A-13	 Pier Set Type: UL/TG/A-14
 Single Socket Plate Type: UL/TG/A-15	 Double Socket Plate Type: UL/TG/A-16
 Twin Socket Plate Type: UL/TG/A-17	 Earth Link Type: UL/TG/A-18
 Knockout 20mm and 25mm Diameter Type: UL/TG/A-21	

When ordering please indicate W (width), H (height), A (length) and Finish.

Steel Surface Cable Trunking

Single Turnbuckle Cover Fastener

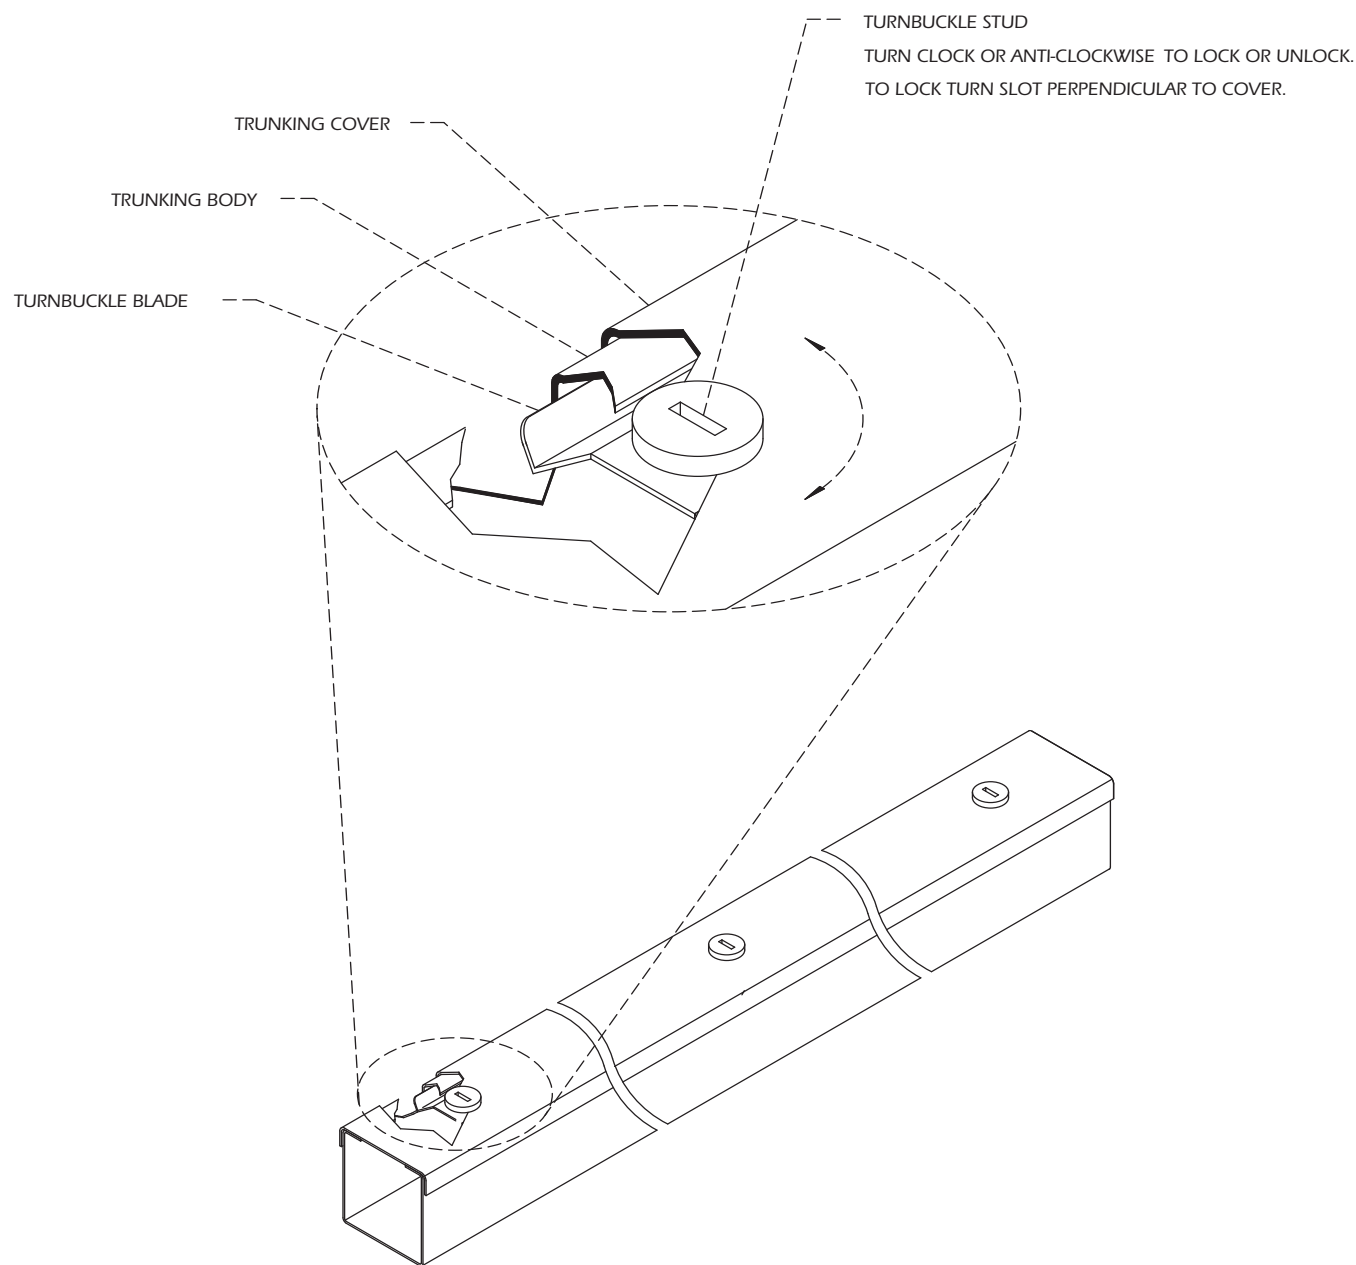

Trunking with Turnbuckle Fastener and Cover


Components Ref.	Trunking Width	Number Of Fastener Per 2.44m Length	Finish
UL/TG/TB3-1	50	3 Pcs	Hot Dip Galvanised
UL/TG/TB3-2	75	3 Pcs	Epoxy or Polyester Coated
UL/TG/TB3-3	100	3 Pcs	Stainless

Dimension in Millimetre

When ordering please indicate Type, Width, Height and Finish.

Steel Surface Cable Trunking

Double Turnbuckle Cover Fastener

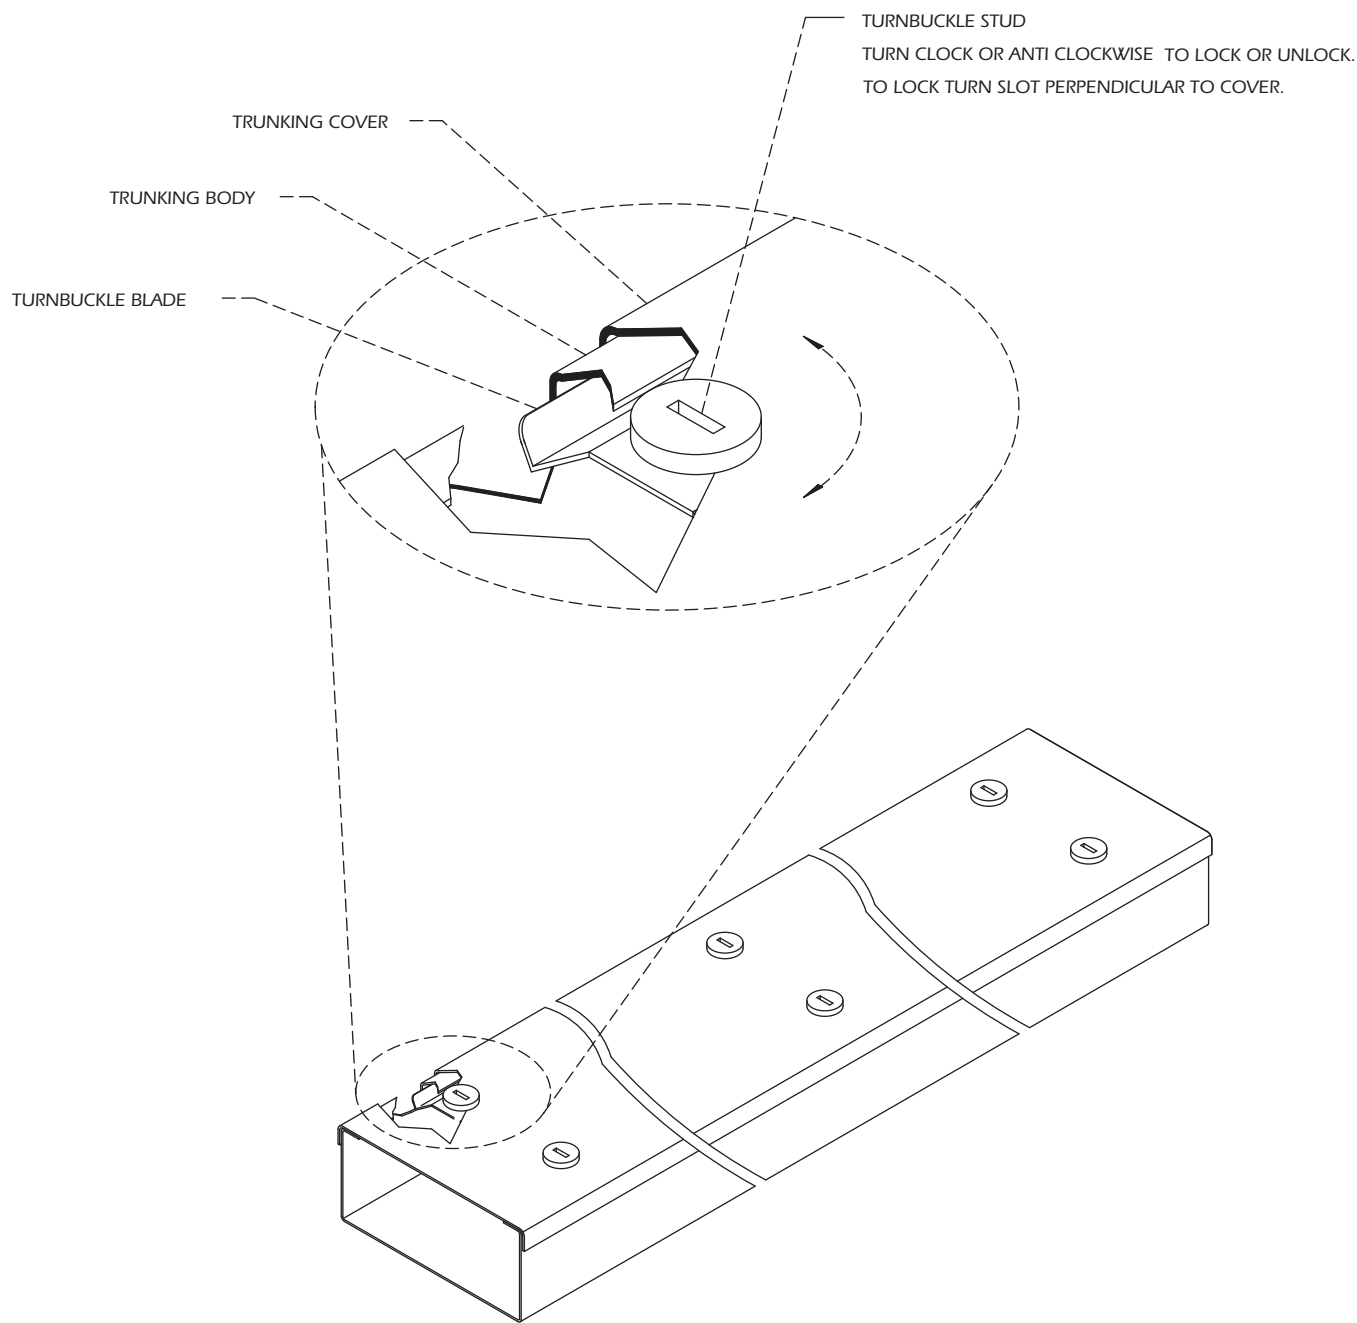


Trunking with Turnbuckle Fastener and Cover

Components Ref.	Trunking Width	Number Of Fastener Per 2.44m Length	Finish
UL/TG/TB6	125 to 300	6 Pcs	Hot Dip Galvanised Epoxy or Polyester Coated Stainless

Dimension in Millimetre

When ordering please indicate Type, Width, Height and Finish.

U-LI™ Steel Cable Tray Typical Layout

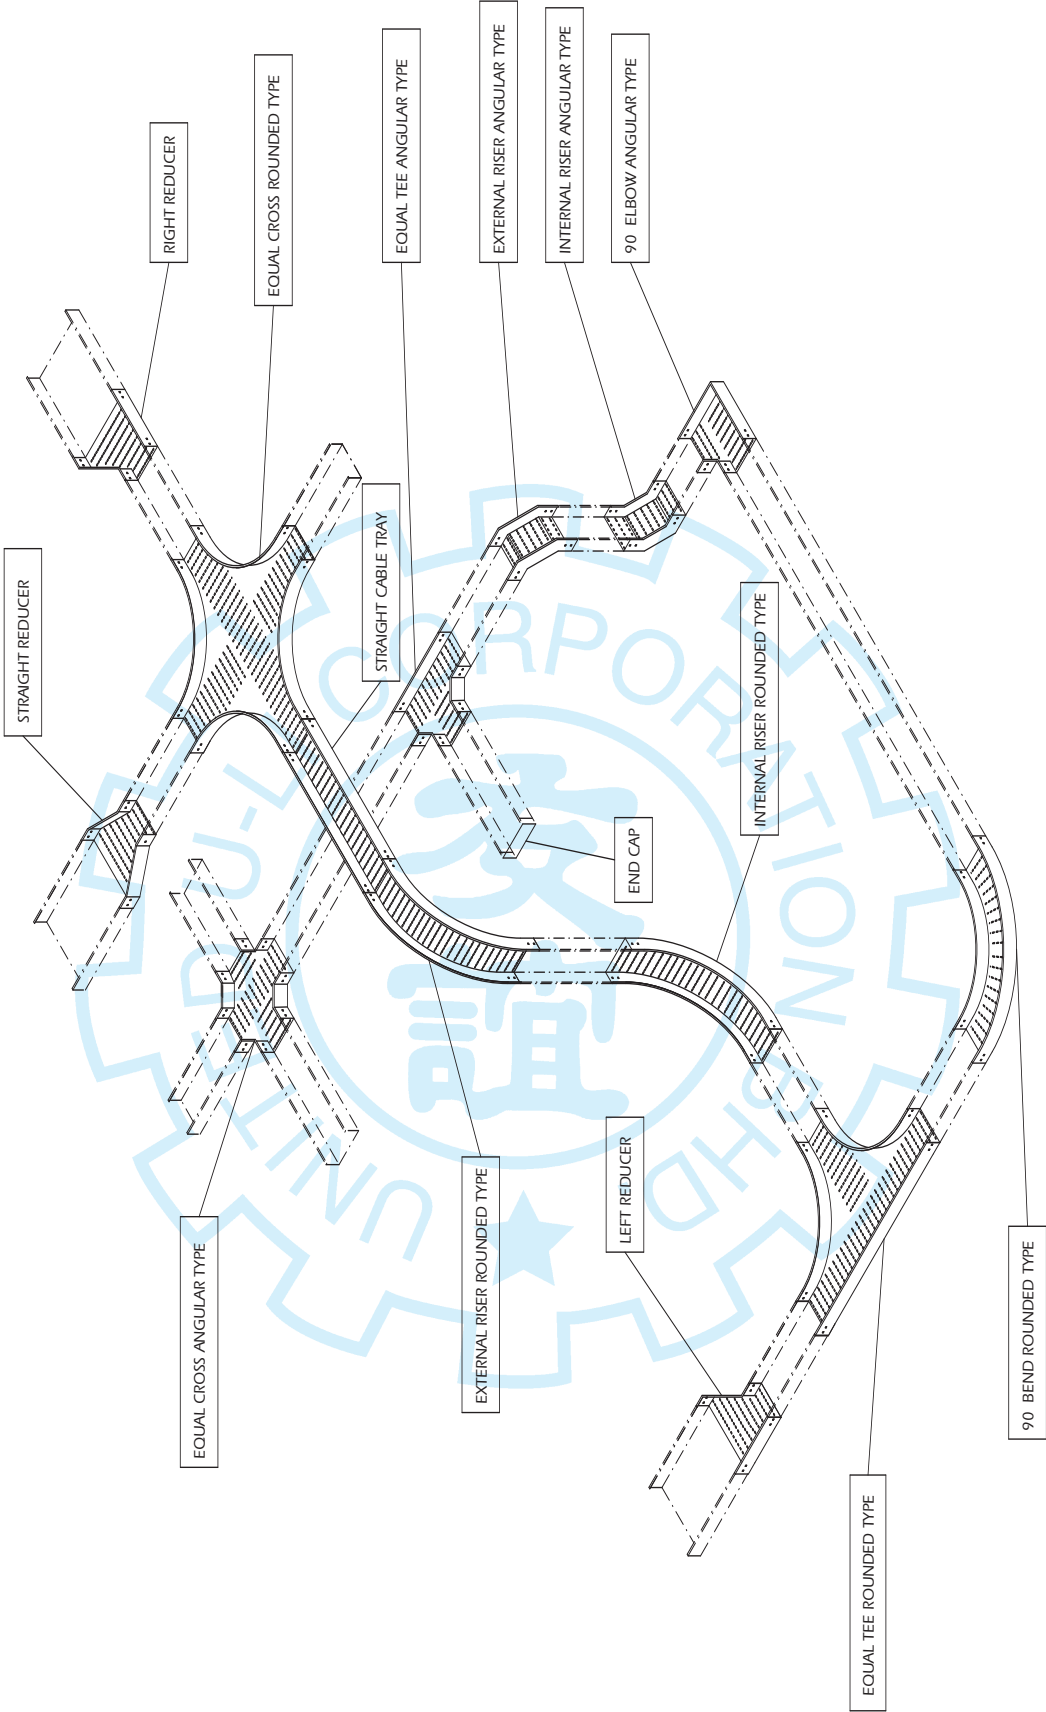

Steel Perforated Cable Tray

U-LI™ Steel Cable Tray Product Range

U-LI™ design of Cable Ladder is compact and fast to install, with both straight Cable Tray and all accessories having a unique integrated coupling system.

U-LI™ offers a wide range of options to suit your design and with load rated to NEMA VE1. We also manufacture Cable Tray to your design.

U-LI™ offers multi side wall profile for your design needs and applications. It has the advantage of quick on site installation, cut to length and reconnection.

U-LI™ offers a wide range of materials to suit the site condition and also choices of final finishes.

Materials:


1. Hot roll mild steel. JISG 3131 SPHC, JISG 3101 SS400
2. Cold roll mild steel. JISG 3141 SPCC
3. Pre-Galvanised steel. BS 2989
4. Electro-Galvanised. BS 1449 Pt 1:1983
5. Stainless steel. AISI 304, 316 or 316L
6. Aluminium.

Materials thickness range from 1mm thick to 3mm thick.


Finishing:

1. Hot dip galvanised.
ASTM A123, BS EN ISO 1461:1999
2. Epoxy coated - ASTM D 1654, BS 6920
3. Polyester coated - ASTM D 1654, BS 6920


Perforated Tray Series

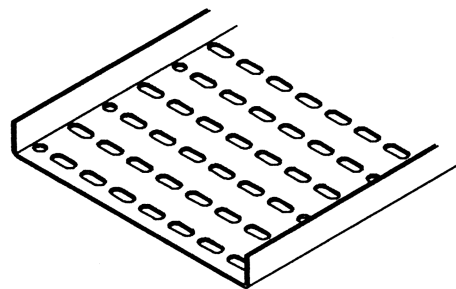


Type: TU

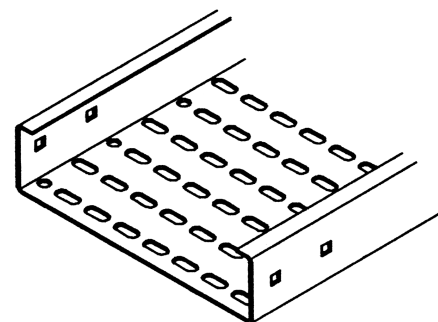


Type: TC

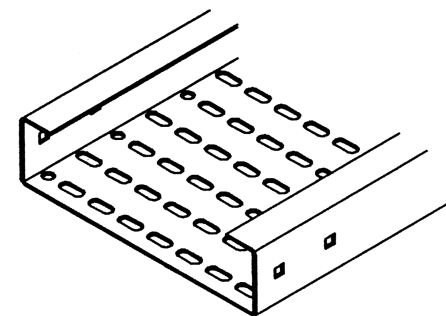

Type: TT

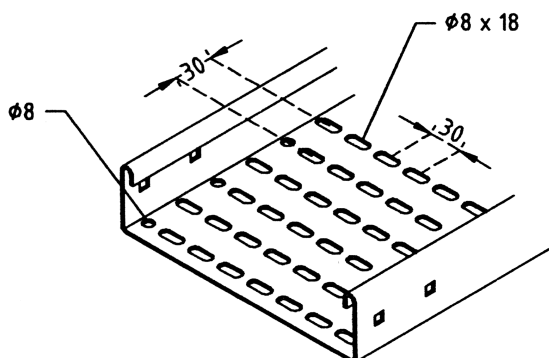

Standard Slots Configuration. Total removal of material approximately 18%. We also manufacture to other slot configurations as per customer's request



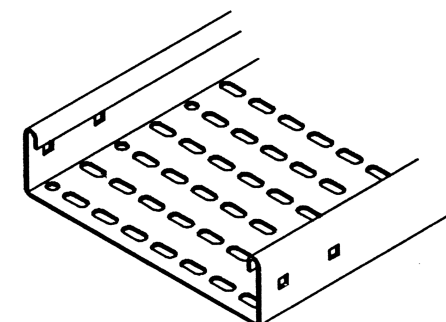


Type: TR

Steel Perforated Cable Tray

Steel Perforated Cable Tray - Straight

Type: UL/TU/ST

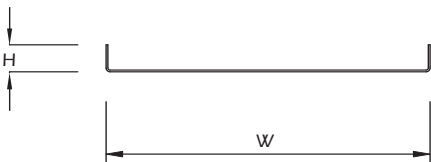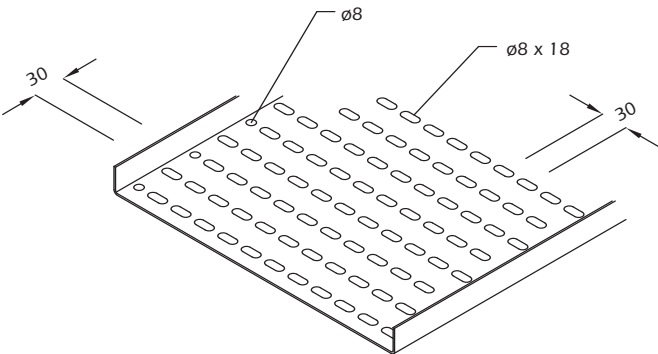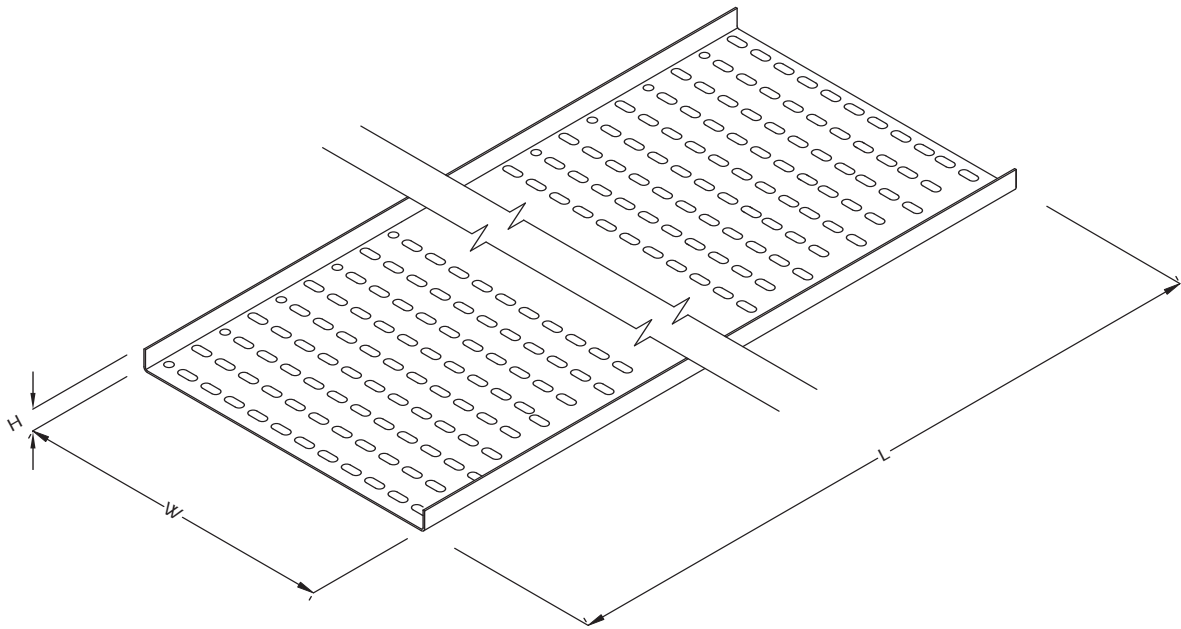

TRAY SECTION

SLOTS DETAIL

Components Ref.	H	W	Thickness	L	Finish
UL/TU/ST-1	13	50	1.5	2440 or 3000	Hot Dip Galvanised Epoxy or Polyester Coated Stainless
UL/TU/ST-2	13	100	1.5		
UL/TU/ST-3	13	150	1.5		
UL/TU/ST-4	17	200	1.5		
UL/TU/ST-5	17	300	1.5		
UL/TU/ST-6	20	350	1.5		
UL/TU/ST-7	20	450	1.5		
UL/TU/ST-8	25	500	1.5		
UL/TU/ST-9	25	600	1.5		

Components Ref.	H	W	Thickness	L	Finish
UL/TU/ST-10	25	700	2.0	2440 or 3000	Hot Dip Galvanised Epoxy or Polyester Coated Stainless
UL/TU/ST-11	25	800	2.0		
UL/TU/ST-12	25	900	2.0		
UL/TU/ST-13	25	1000	2.0		

Dimension in Millimetre


Abbreviation. W - Width H - Height L - Length

When ordering please indicate Material, Finish (F) and Length (L)
We also supply other sizes with the same profile.

Steel Perforated Cable Tray

Steel Perforated Cable Tray - 90° Elbow

Type: UL/TU/EL90

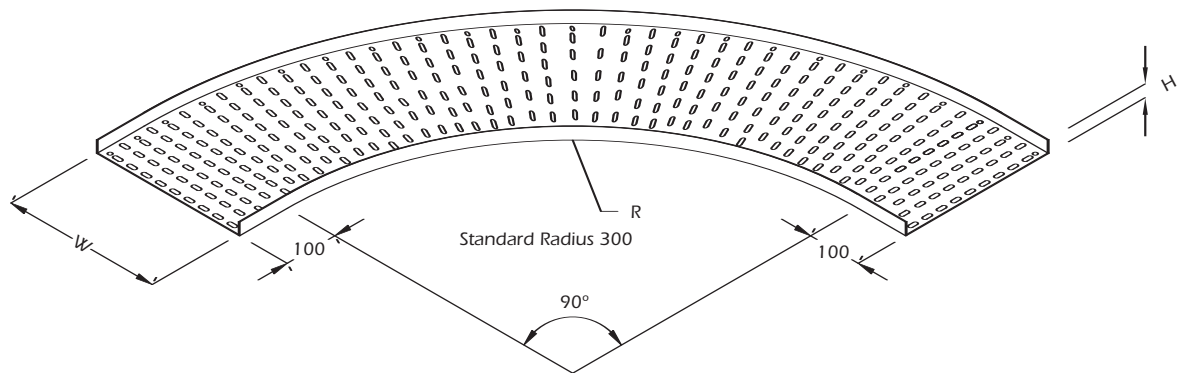


Dimension in Millimetre

Abbreviation. W - Width H - Height R - Radius

When ordering Material, Finish and Sizes as straight cable tray please also indicate Radius (R)

Steel Perforated cable Tray - 45° Elbow

Type: UL/TU/EL45

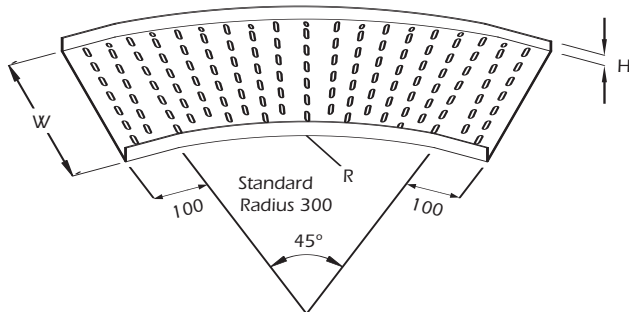

Dimension in Millimetre


Abbreviation. W - Width H - Height R - Radius

When ordering Material, Finish and Sizes as straight cable tray please also indicate Radius (R)

Steel Perforated Cable Tray

Steel Perforated Cable Tray - Horizontal Equal Tee

Type: UL/TU/ET

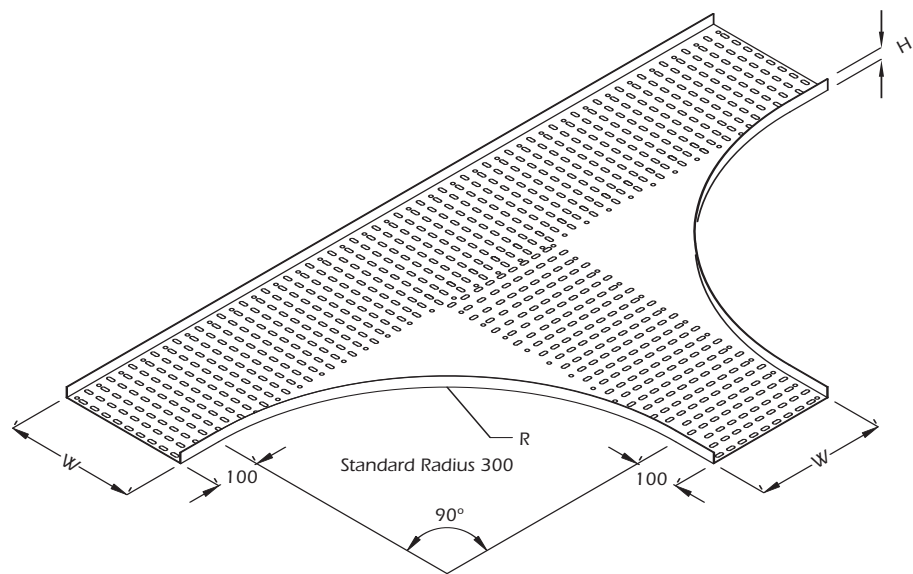


Dimension in Millimetre

Abbreviation. W - Width H - Height R - Radius

When ordering Material, Finish and Sizes as straight cable tray please also indicate Radius (R)

Steel Perforated Cable Tray - Horizontal Unequal Tee

Type: UL/TU/UT

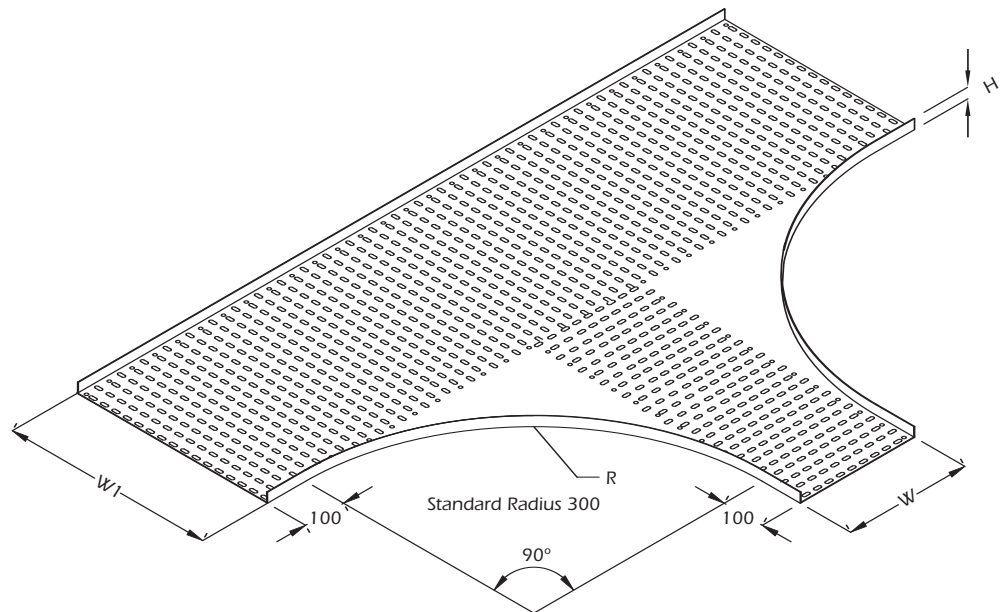

Dimension in Millimetre


Abbreviation. W - Width H - Height R - Radius

When ordering Material, Finish and Sizes as straight cable tray please also indicate Radius (R) and Width (W1)

Steel Perforated Cable Tray

Steel Perforated Cable Tray - Horizontal Equal Cross

Type: UL/TU/EC

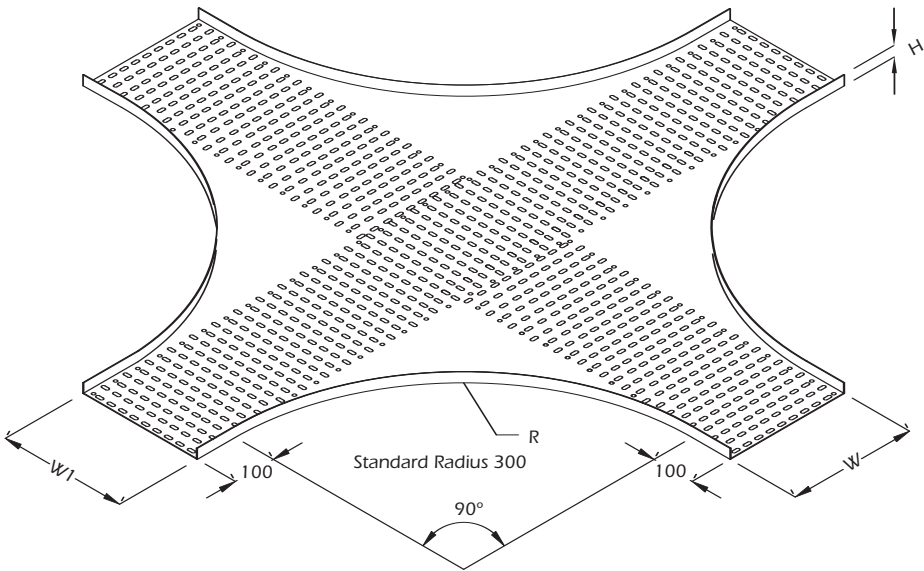


Dimension in Millimetre

Abbreviation. W - Width H - Height R - Radius

When ordering Type, Material and Finish as straight cable tray please also indicate Radius (R)

Steel Perforated Cable Tray - Horizontal Unequal Cross

Type: UL/TU/UC

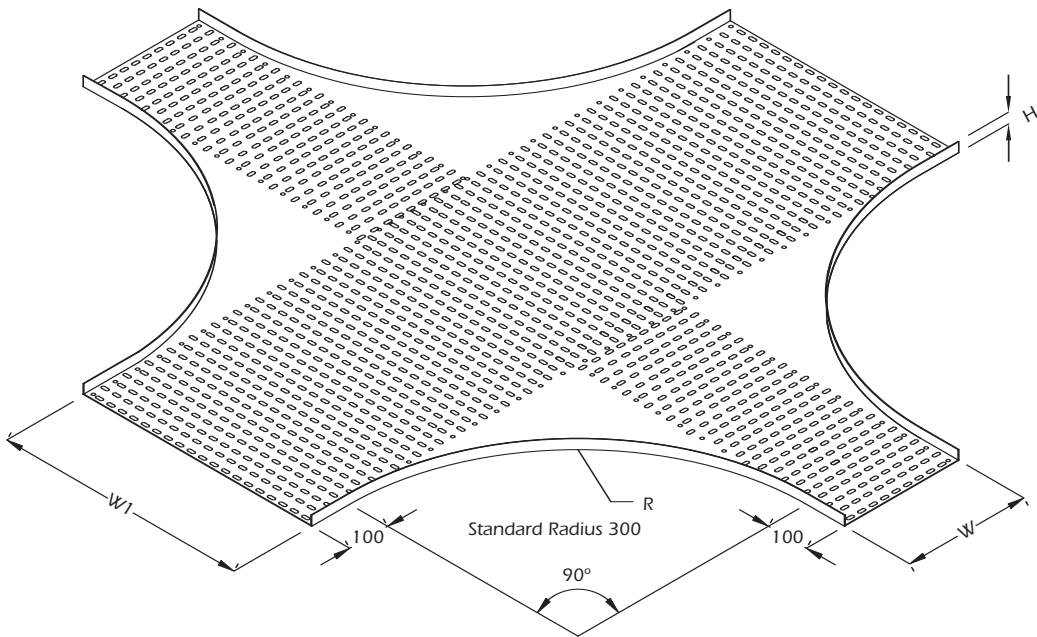

Dimension in Millimetre


Abbreviation. W - Width H - Height R - Radius

When ordering Material, Finish and Sizes as straight cable tray please also indicate Radius (R) and Width (W1)

Steel Perforated Cable Tray

Steel Perforated Cable Tray - External Riser

Type: UL/TU/ER

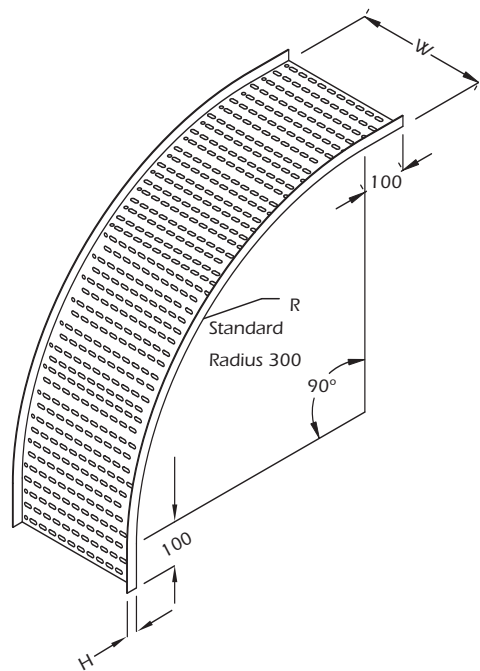


Dimension in Millimetre

Abbreviation. W - Width H - Height R - Radius

When ordering Material, Finish and sizes as straight cable tray please also indicate Radius (R)

Steel Perforated Cable Tray - Internal Riser

Type: UL/TU/IR

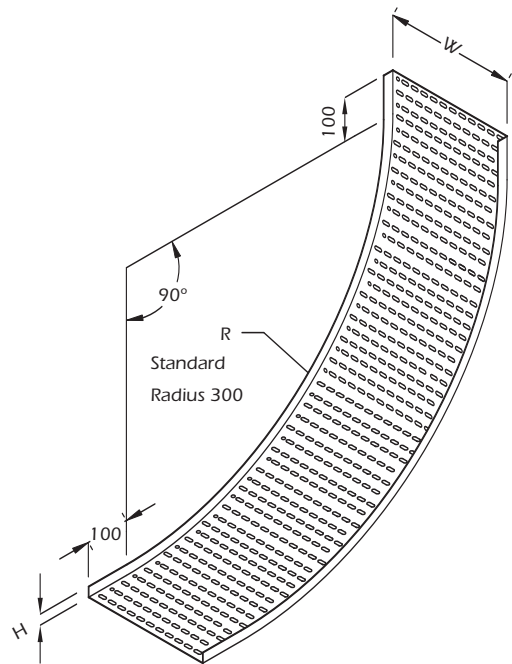

Dimension in Millimetre


Abbreviation. W - Width H - Height R - Radius

When ordering Material, Finish and sizes as straight cable tray please also indicate Radius (R)

Steel Perforated Cable Tray

Steel Perforated Cable Tray - Right Offset Reducer

Type: UL/TU/SD

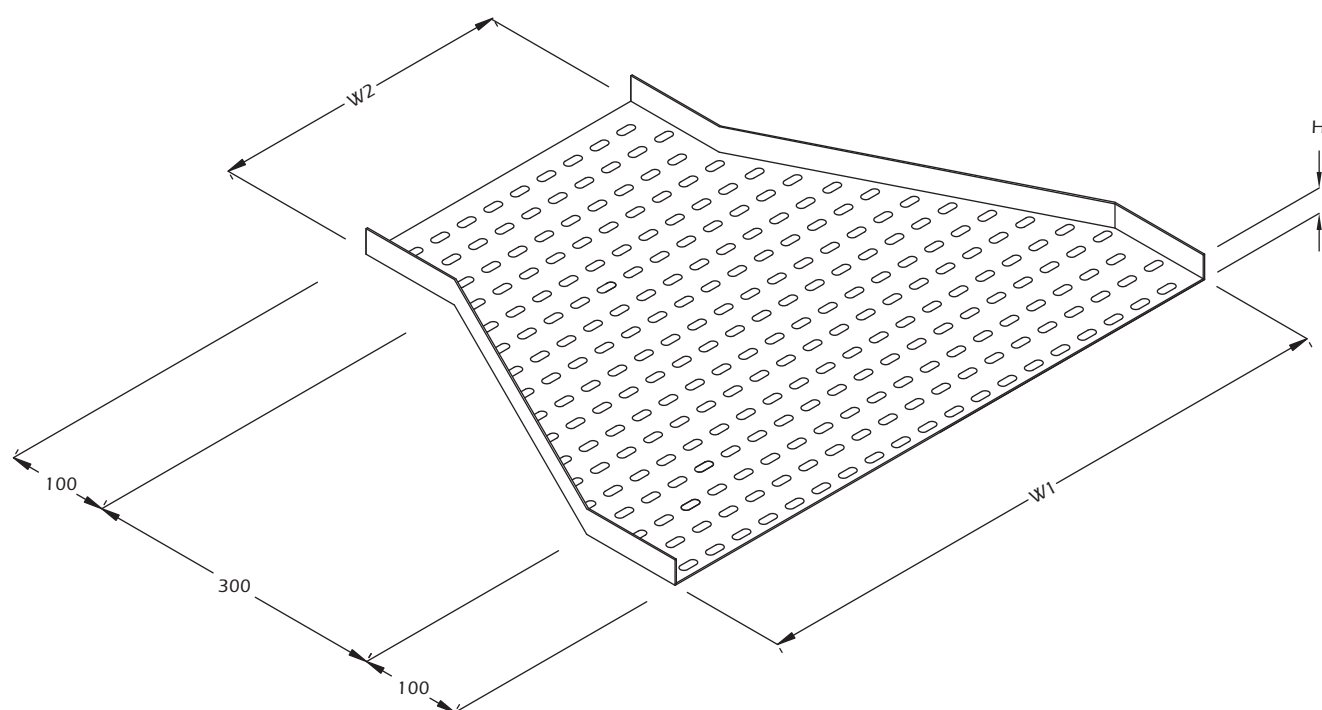

Dimension in Millimetre


Abbreviation. W - Width H - Height

When ordering Material, Finish and Sizes as straight cable tray please also indicate Width (W2)

Steel Perforated Cable Tray

Steel Perforated Cable Tray - Right Offset Reducer

Type: UL/TU/RR

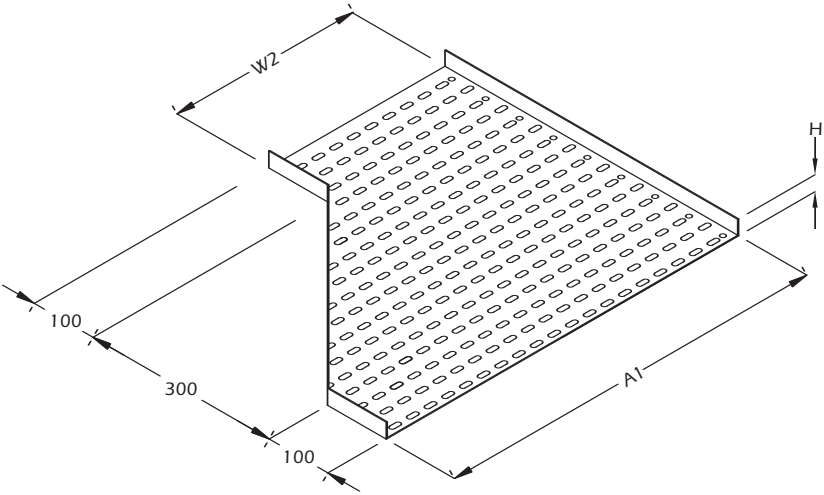


Dimension in Millimetre
Abbreviation. W - Width H - Height

When ordering Material, Finish and Sizes as straight cable tray please also indicate Width (W2)

Steel Perforated Cable Tray - Left Offset Reducer

Type: UL/TU/LR

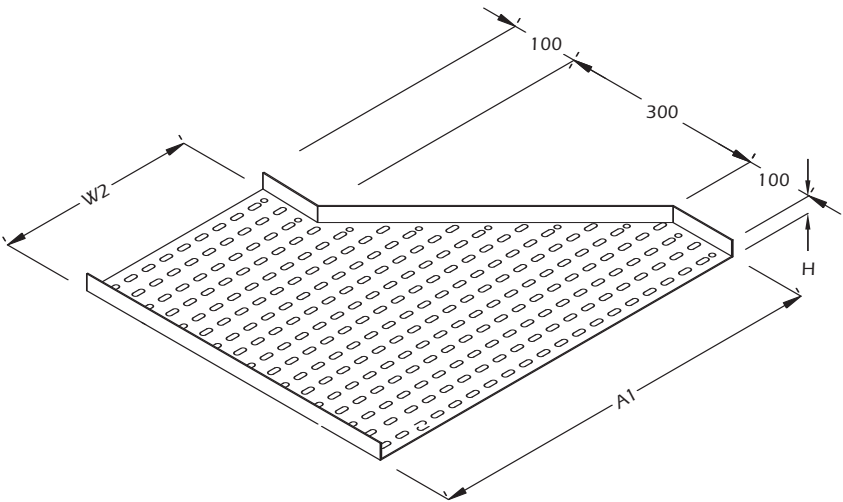


Dimension in Millimetre
Abbreviation. W - Width H - Height

When ordering Material, Finish and Sizes as straight cable tray please also indicate Width (W2)


Steel Perforated Cable Tray

Steel Perforated Cable Tray - Horizontal Splice Plate

Type: UL/TU/HS

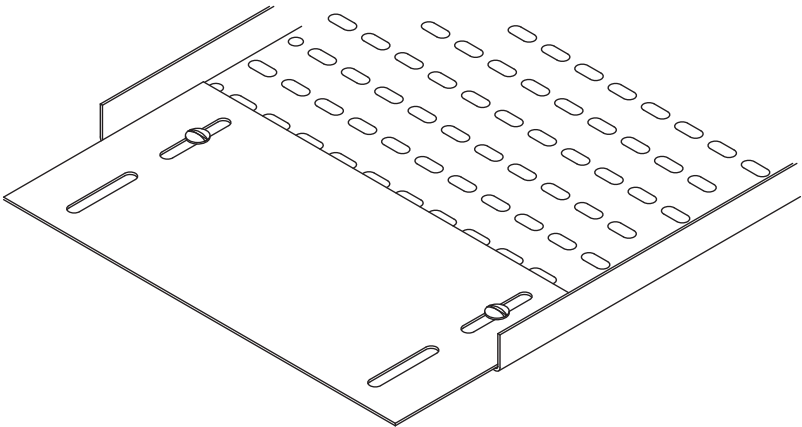

Application

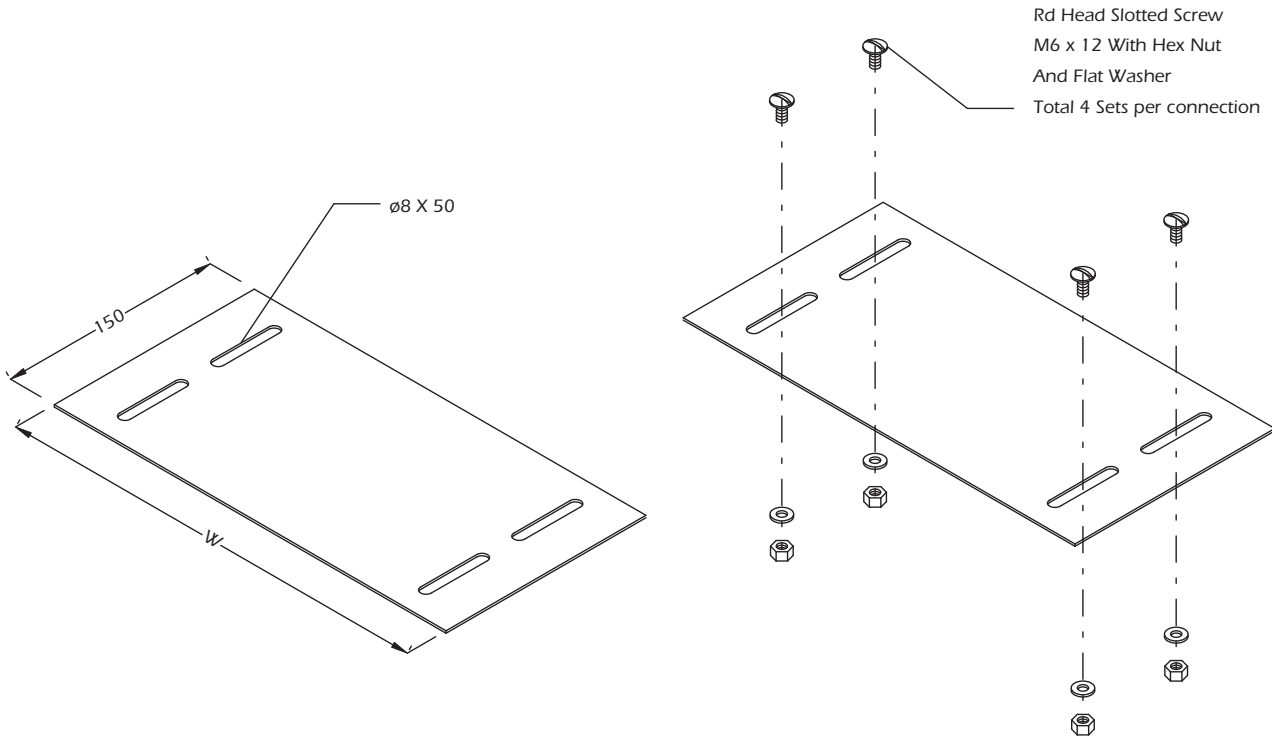


Splice Plate and Fixture

Components Ref.	W	Finish	Application
UL/TU/HS	Perforated Tray Width Minus 6mm	Hot Dip Galvanised Epoxy or Polyester Coated Stainless	Applicable to: Straight Trays, Elbows and Risers


Dimension in Millimetre
When ordering please indicate straight cable tray Width.

Steel Perforated Cable Tray


Steel Perforated Cable Tray - Accessories Angular Type

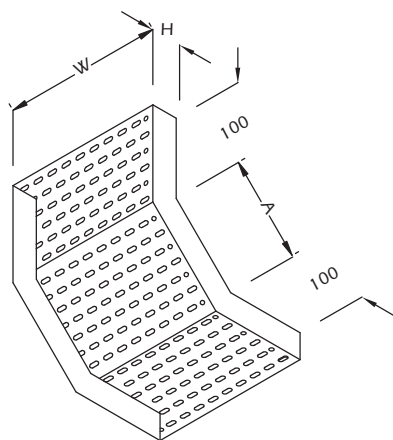


Type: UL/TU/AT-1

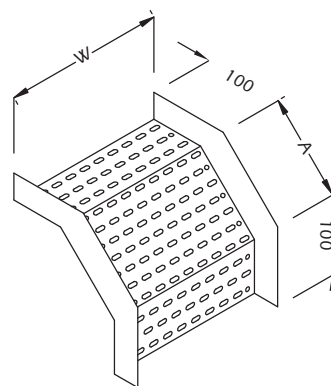


Type: UL/TU/AT-2

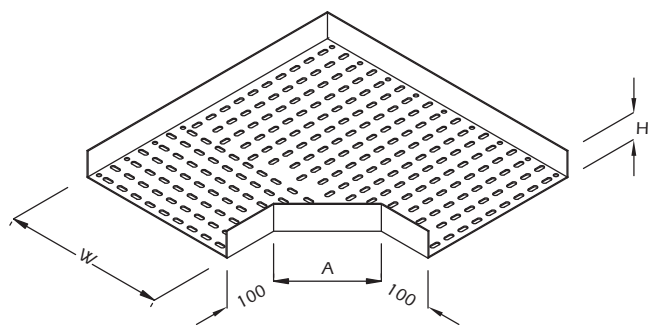


Type: UL/TU/AT-3

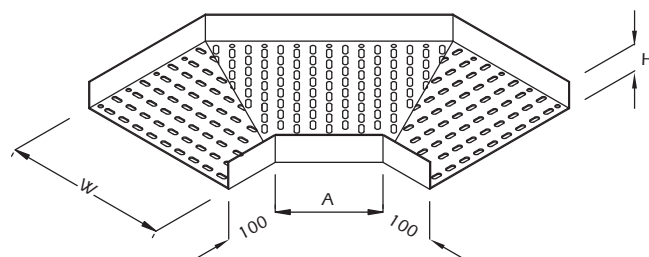

Type: UL/TU/AT-4

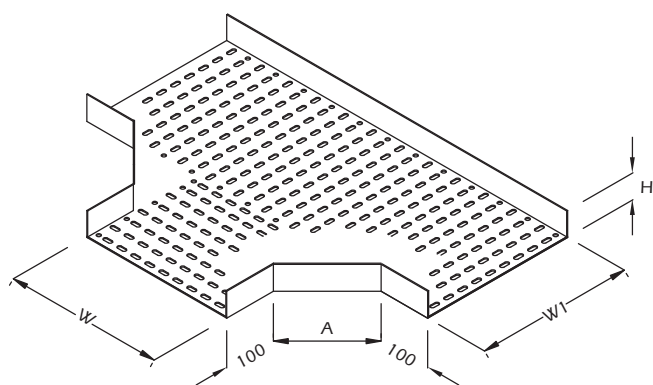

Type: UL/TU/AT-5

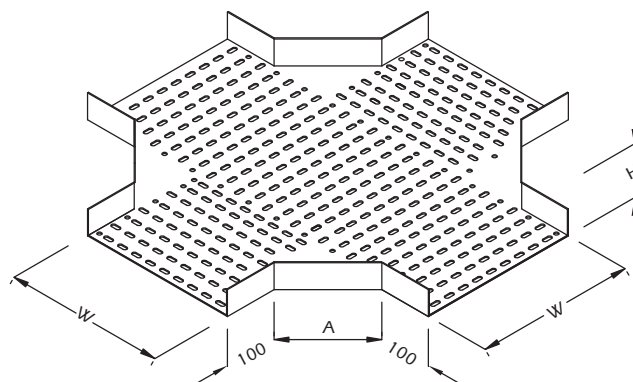

Type: UL/TU/AT-6

Components Ref.	H	A	W-W1
UL/TU/AT	50	100	Width
	75	100	
	100	100	
	150	150	



Dimension in Millimetre

When ordering please indicate Type, Finish and Sizes as in straight cable tray.

Steel Perforated Cable Tray

Steel Perforated Cable Tray - Straight

Type: UL/TT/ST or UL/TC/ST

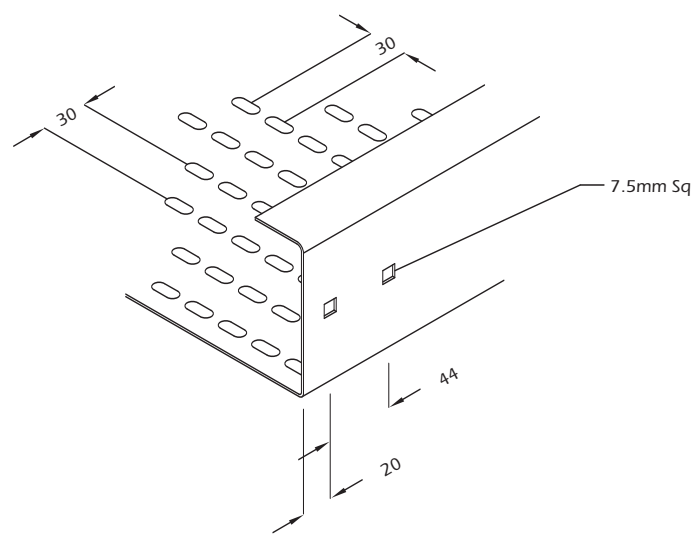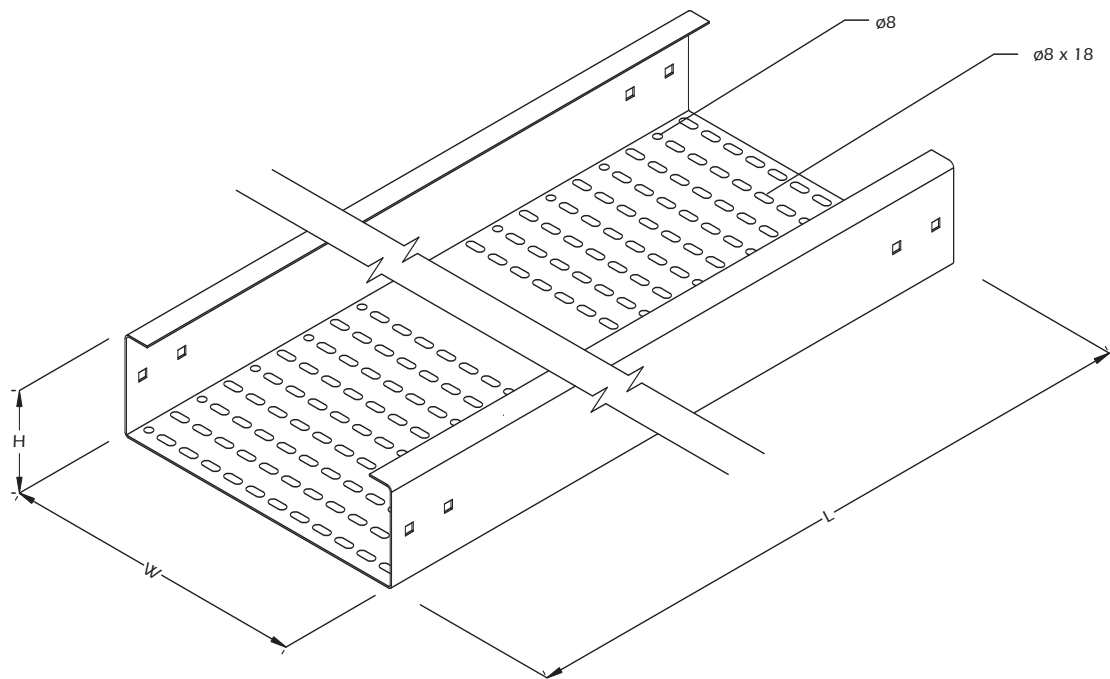


CONNECTION SLOT DETAIL



TRAY SECTION

Type: UL/TT/ST

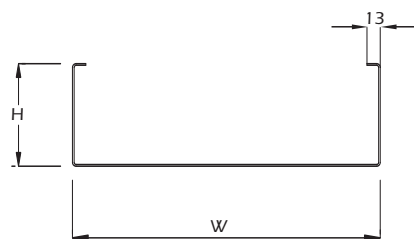

TRAY SECTION

Type: UL/TC/ST

Steel Perforated Cable Tray

Steel Perforated Cable Tray - Straight

Type: UL/TT/ST or UL/TC/ST

Components Ref.	H	W	Thickness	L	Finish
UL/TT/ST or UL/TC/ST/2-2	50	50	1.5	2440 or 3000	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/TT/ST or UL/TC/ST/2-4	50	100	1.5		
UL/TT/ST or UL/TC/ST/2-6	50	150	1.5		
UL/TT/ST or UL/TC/ST/2-8	50	200	1.5		
UL/TT/ST or UL/TC/ST/2-10	50	250	1.5		
UL/TT/ST or UL/TC/ST/2-12	50	300	1.5		
UL/TT/ST or UL/TC/ST/2-14	50	350	1.5		
UL/TT/ST or UL/TC/ST/2-16	50	400	1.5		
UL/TT/ST or UL/TC/ST/2-18	50	450	2.0		
UL/TT/ST or UL/TC/ST/2-20	50	500	2.0		
UL/TT/ST or UL/TC/ST/2-22	50	550	2.0		
UL/TT/ST or UL/TC/ST/2-24	50	600	2.0		
UL/TT/ST or UL/TC/ST/2-26	50	650	2.0		
UL/TT/ST or UL/TC/ST/2-28	50	700	2.0		
UL/TT/ST or UL/TC/ST/2-30	50	750	2.0		
UL/TT/ST or UL/TC/ST/2-34	50	850	2.0		
UL/TT/ST or UL/TC/ST/2-36	50	900	2.0		
UL/TT/ST or UL/TC/ST/2-38	50	950	2.0		
UL/TT/ST or UL/TC/ST/2-40	50	1000	2.0		
UL/TT/ST or UL/TC/ST/3-3	75	75	1.5		
UL/TT/ST or UL/TC/ST/3-4	75	100	1.5		
UL/TT/ST or UL/TC/ST/3-6	75	150	1.5		
UL/TT/ST or UL/TC/ST/3-8	75	200	1.5		
UL/TT/ST or UL/TC/ST/3-10	75	250	1.5		
UL/TT/ST or UL/TC/ST/3-12	75	300	1.5		
UL/TT/ST or UL/TC/ST/3-14	75	350	1.5		
UL/TT/ST or UL/TC/ST/3-16	75	400	1.5		
UL/TT/ST or UL/TC/ST/3-18	75	450	2.0		
UL/TT/ST or UL/TC/ST/3-20	75	500	2.0		
UL/TT/ST or UL/TC/ST/3-22	75	550	2.0		
UL/TT/ST or UL/TC/ST/3-24	75	600	2.0		
UL/TT/ST or UL/TC/ST/3-26	75	650	2.0		
UL/TT/ST or UL/TC/ST/3-28	75	700	2.0		
UL/TT/ST or UL/TC/ST/3-30	75	750	2.0		
UL/TT/ST or UL/TC/ST/3-34	75	850	2.0		
UL/TT/ST or UL/TC/ST/3-36	75	900	2.0		
UL/TT/ST or UL/TC/ST/3-38	75	950	2.0		
UL/TT/ST or UL/TC/ST/3-40	75	1000	2.0		
UL/TT/ST or UL/TC/ST/4-4	100	100	1.5		
UL/TT/ST or UL/TC/ST/4-6	100	150	1.5		
UL/TT/ST or UL/TC/ST/4-8	100	200	1.5		
UL/TT/ST or UL/TC/ST/4-10	100	250	1.5		
UL/TT/ST or UL/TC/ST/4-12	100	300	1.5		
UL/TT/ST or UL/TC/ST/4-14	100	350	2.0		
UL/TT/ST or UL/TC/ST/4-16	100	400	2.0		

Components Ref.	H	W	Thickness	L	Finish
UL/TT/ST or UL/TC/ST/4-18	100	450	2.0	2440 or 3000	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/TT/ST or UL/TC/ST/4-20	100	500	2.0		
UL/TT/ST or UL/TC/ST/4-22	100	550	2.0		
UL/TT/ST or UL/TC/ST/4-24	100	600	2.0		
UL/TT/ST or UL/TC/ST/4-26	100	650	2.0		
UL/TT/ST or UL/TC/ST/4-28	100	700	2.0		
UL/TT/ST or UL/TC/ST/4-30	100	750	2.0		
UL/TT/ST or UL/TC/ST/4-32	100	800	2.0		
UL/TT/ST or UL/TC/ST/4-34	100	850	2.0		
UL/TT/ST or UL/TC/ST/4-36	100	900	2.0		
UL/TT/ST or UL/TC/ST/4-38	100	950	2.0		
UL/TT/ST or UL/TC/ST/4-40	100	1000	2.0		
UL/TT/ST or UL/TC/ST/5-6	125	150	1.5		
UL/TT/ST or UL/TC/ST/5-8	125	200	1.5		
UL/TT/ST or UL/TC/ST/5-10	125	250	1.5		
UL/TT/ST or UL/TC/ST/5-12	125	300	1.5		
UL/TT/ST or UL/TC/ST/5-14	125	350	2.0		
UL/TT/ST or UL/TC/ST/5-16	125	450	2.0		
UL/TT/ST or UL/TC/ST/5-18	125	450	2.0		
UL/TT/ST or UL/TC/ST/5-20	125	500	2.0		
UL/TT/ST or UL/TC/ST/5-22	125	550	2.0		
UL/TT/ST or UL/TC/ST/5-24	125	600	2.0		
UL/TT/ST or UL/TC/ST/5-26	125	650	2.0		
UL/TT/ST or UL/TC/ST/5-28	125	700	2.0		
UL/TT/ST or UL/TC/ST/5-30	125	750	2.0		
UL/TT/ST or UL/TC/ST/5-32	125	800	2.0		
UL/TT/ST or UL/TC/ST/5-34	125	850	2.0		
UL/TT/ST or UL/TC/ST/5-36	125	900	2.0		
UL/TT/ST or UL/TC/ST/5-38	125	950	2.0		
UL/TT/ST or UL/TC/ST/6-6	150	150	1.5		
UL/TT/ST or UL/TC/ST/6-8	150	200	1.5		
UL/TT/ST or UL/TC/ST/6-10	150	250	1.5		
UL/TT/ST or UL/TC/ST/6-12	150	300	1.5		
UL/TT/ST or UL/TC/ST/6-14	150	350	2.0		
UL/TT/ST or UL/TC/ST/6-16	150	400	2.0		
UL/TT/ST or UL/TC/ST/6-18	150	450	2.0		
UL/TT/ST or UL/TC/ST/6-20	150	500	2.0		
UL/TT/ST or UL/TC/ST/6-22	150	550	2.0		
UL/TT/ST or UL/TC/ST/6-24	150	600	2.0		
UL/TT/ST or UL/TC/ST/6-26	150	650	2.0		
UL/TT/ST or UL/TC/ST/6-28	150	700	2.0		
UL/TT/ST or UL/TC/ST/6-30	150	750	2.0		
UL/TT/ST or UL/TC/ST/6-32	150	800	2.0		
UL/TT/ST or UL/TC/ST/6-34	150	850	2.0		
UL/TT/ST or UL/TC/ST/6-36	150	900	2.0		

Dimension in Millimetre

Abbreviation. W - Width H - Height L - Length T - Thickness


When ordering please indicate Type, Material, Finish and Length (L)

We also supply other sizes with the same Cable Tray profile.

Steel Perforated Cable Tray

Steel Perforated Cable Tray - 90° Elbow

Type: UL/TT/EL90 or UL/TC/EL90

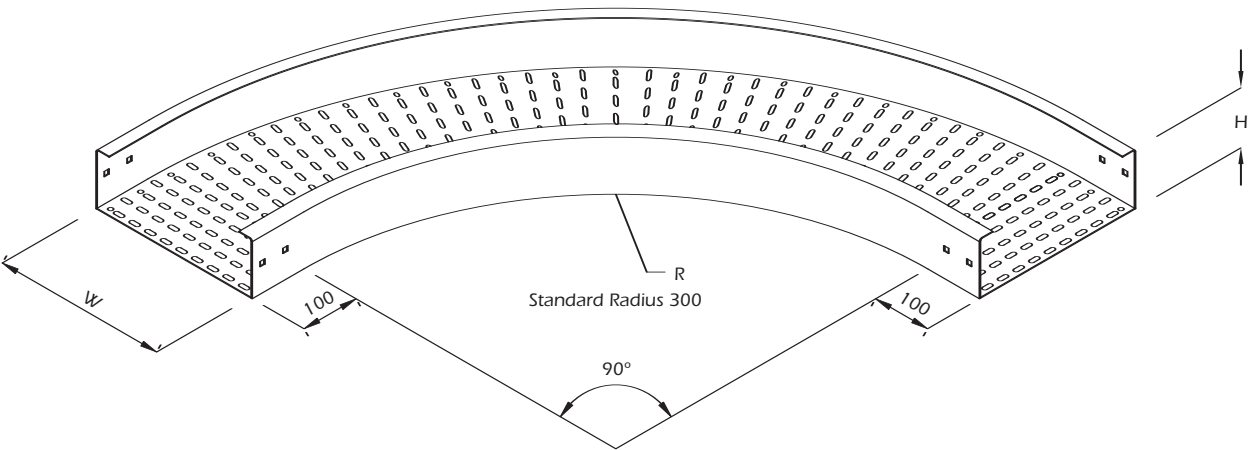


Dimension in Millimetre
Abbreviation. W - Width H - Height R - Radius

When ordering Type, Material and Finish as straight cable tray please also indicate Radius (R)

Steel Perforated Cable Tray - 45° Elbow

Type: UL/TT/EL45 or UL/TC/EL45

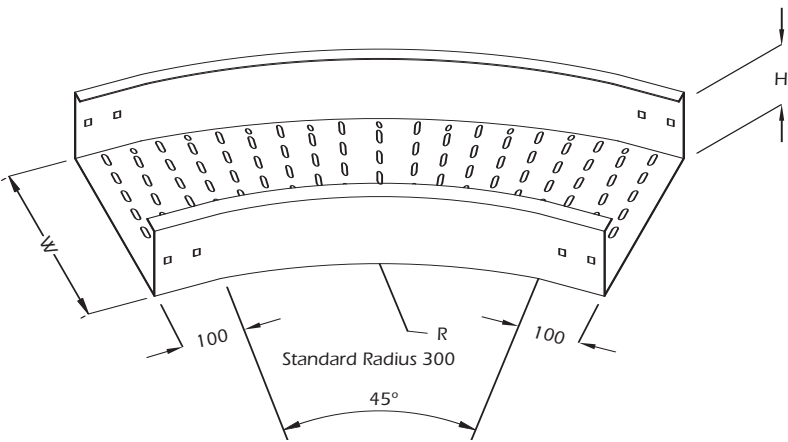


Dimension in Millimetre
Abbreviation. W - Width H - Height R - Radius

When ordering Type, Material and Finish as straight cable tray please also indicate Radius (R)

Steel Perforated Cable Tray

Steel Perforated Cable Tray - Horizontal Equal Tee

Type: UL/TT/ET or UL/TC/ET

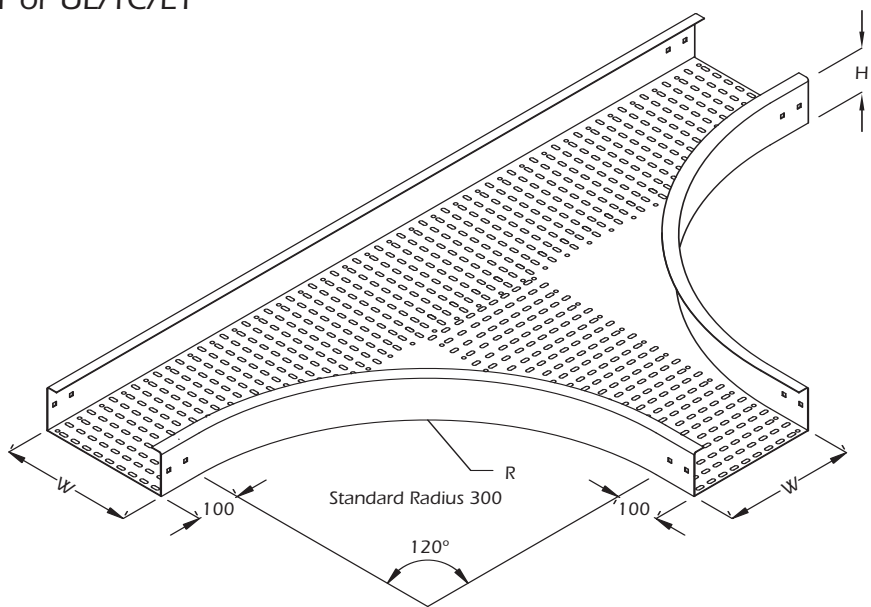


Dimension in Millimetre

Abbreviation. W - Width H - Height R - Radius

When ordering Type, Material and Finish as straight cable tray please also indicate Radius (R)

Steel Perforated Cable Tray - Horizontal Unequal Tee

Type: UL/TT/UT or UL/TC/UT

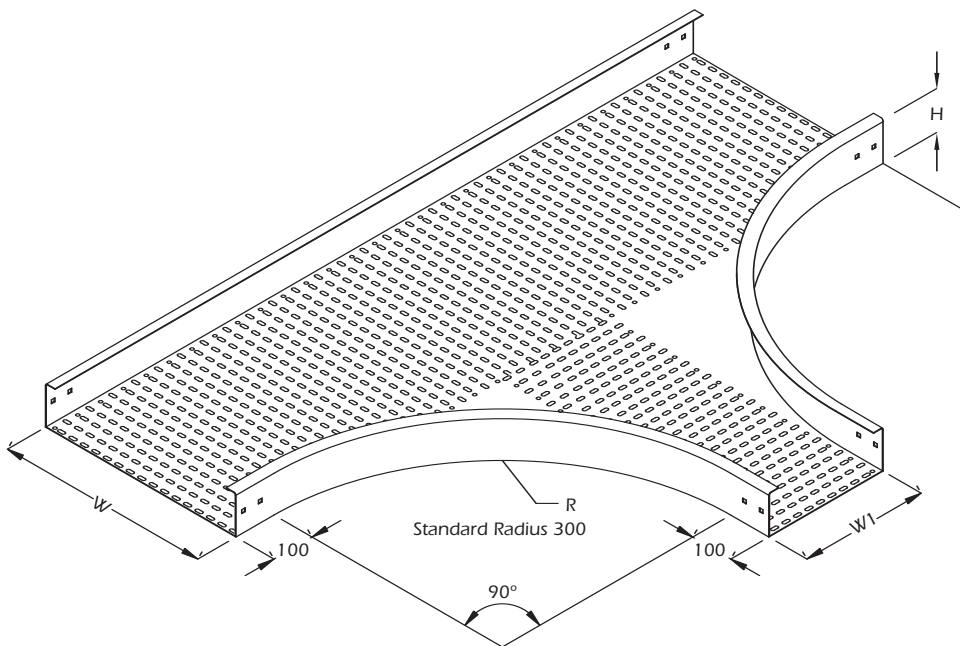

Dimension in Millimetre


Abbreviation. W - Width H - Height R - Radius

When ordering Type, Material and Finish as straight cable tray please also indicate Radius (R)

Steel Perforated Cable Tray

Steel Perforated Cable Tray - External Riser

Type: UL/TT/ER or UL/TC/ER

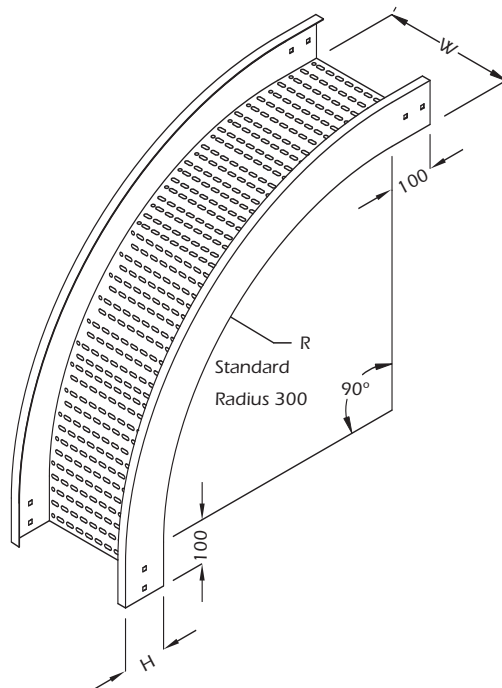


Dimension in Millimetre

Abbreviation. W - Width H - Height R - Radius

When ordering Type, Material and Finish as straight cable tray please also indicate Radius (R)

Steel Perforated Cable Tray - Internal Riser

Type: UL/TT/IR or UL/TC/IR

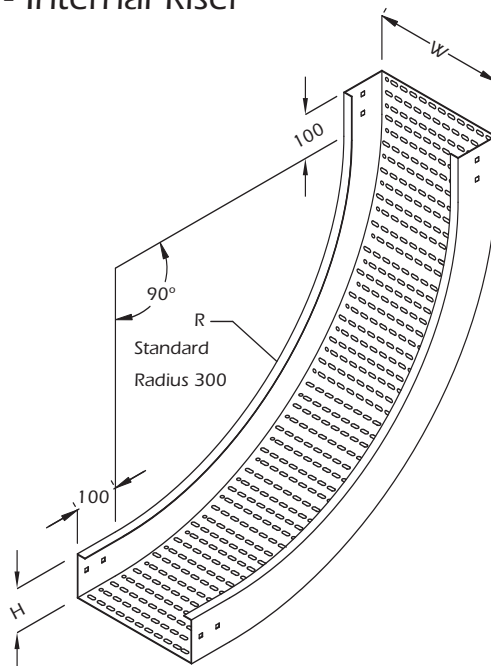

Dimension in Millimetre


Abbreviation. W - Width H - Height R - Radius

When ordering Type, Material and Finish as straight cable tray please also indicate Radius (R)

Steel Perforated Cable Tray

Steel Perforated Cable Tray - Straight Offset Reducer

Type: UL/TT/SR or UL/TC/SR

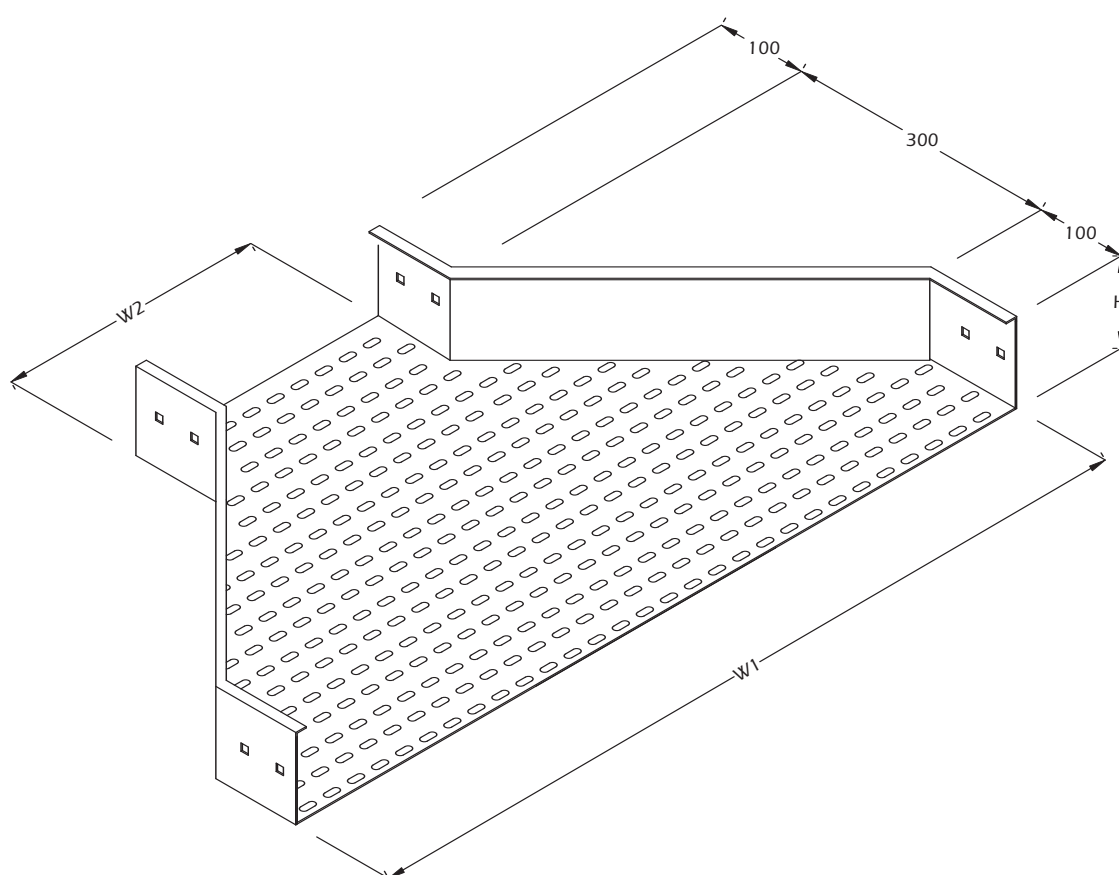

Dimension in Millimetre


Abbreviation. W - Width H - Height

When ordering Type, Material and Finish as straight cable tray please also indicate Width (W2)


Steel Perforated Cable Tray

Steel Perforated Cable Tray - Horizontal Splice Plate

Type: UL/TT/HS or UL/TC/HS

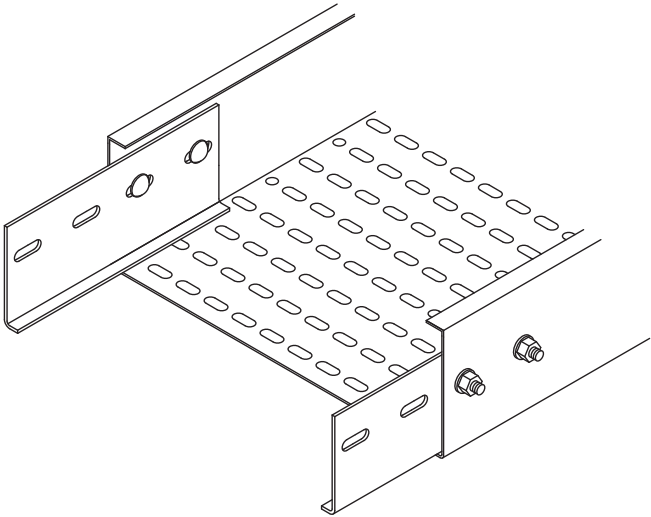

Application

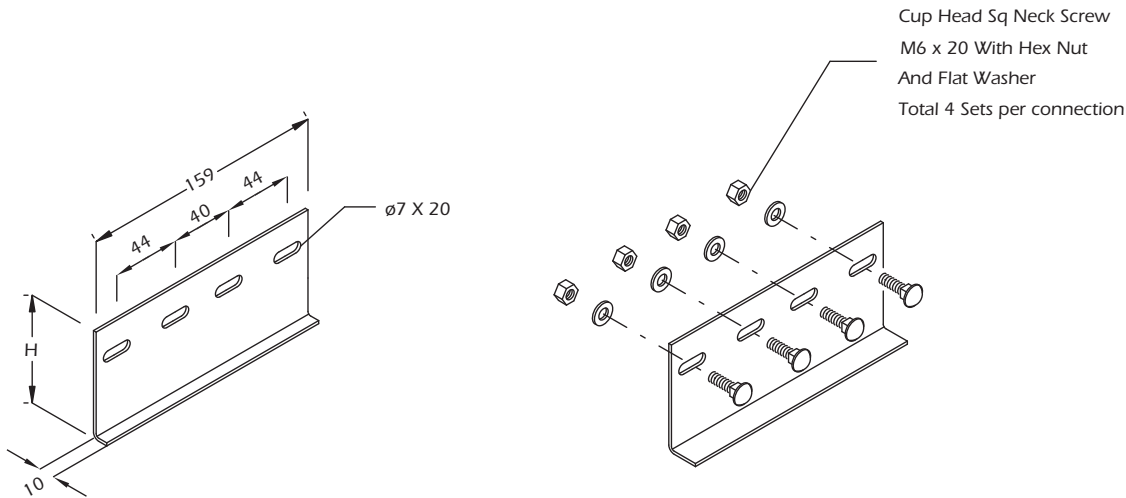

Splice Plate and Fixture

Components Ref.	Steel Perforated Tray Height	H	Finish
UL/TT/HS or UL/TC/HS-2	50	34	Hot Dip Galvanised Epoxy or Polyester Coated Stainless
UL/TT/HS or UL/TC/HS-3	75	59	
UL/TT/HS or UL/TC/HS-4	100	84	
UL/TT/HS or UL/TC/HS-6	150	134	


Dimension in Millimetre

When ordering please indicate Type, Finish and Sizes as in straight cable tray.


Steel Perforated Cable Tray

Steel Perforated Cable Tray - Vertical Adjustable Splice Plate

Type: UL/TT/VS or UL/TC/VS

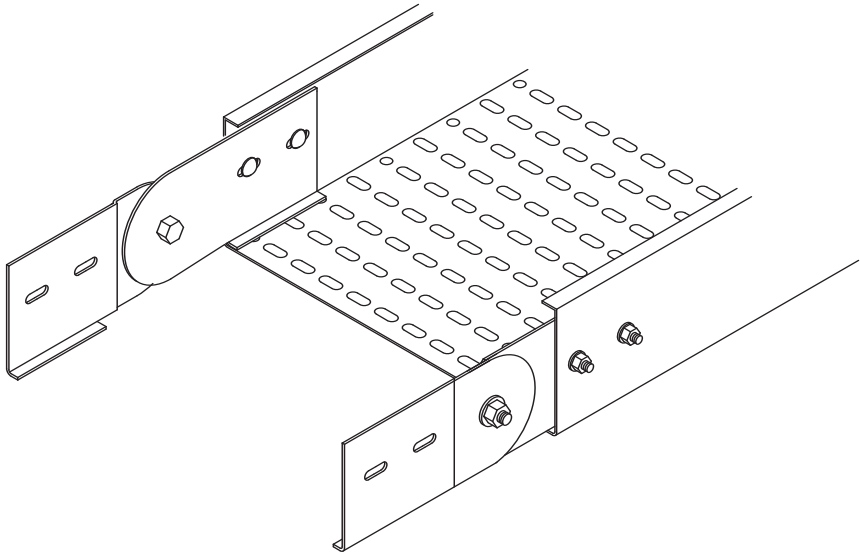

Application

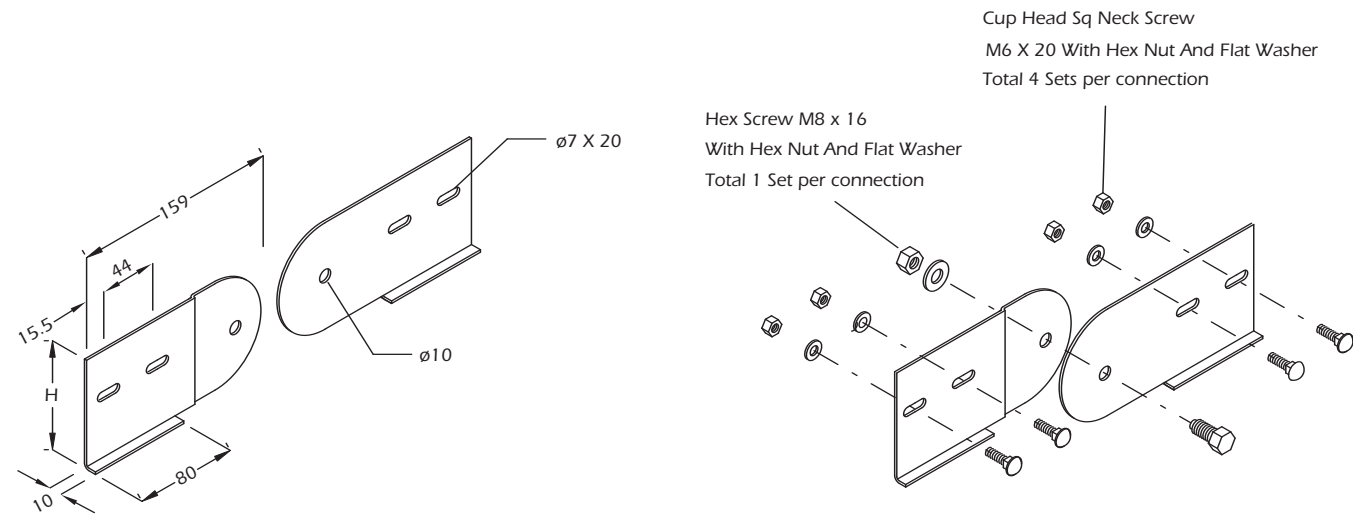

Splice Plate and Fixture

Components Ref.	Steel Perforated Tray Height	H	Finish
UL/TT/VS or UL/TC/VS-2	50	34	Hot Dip Galvanised Epoxy or Polyester Coated Stainless
UL/TT/VS or UL/TC/VS-3	75	59	
UL/TT/VS or UL/TC/VS-4	100	84	
UL/TT/VS or UL/TC/VS-6	150	134	


Dimension in Millimetre

When ordering please indicate Type, Finish and Sizes as in straight cable tray.

Steel Perforated Cable Tray

Steel Perforated Cable Tray - Horizontal Adjustable Splice Plate

Type: UL/TT/HP or UL/TC/HP

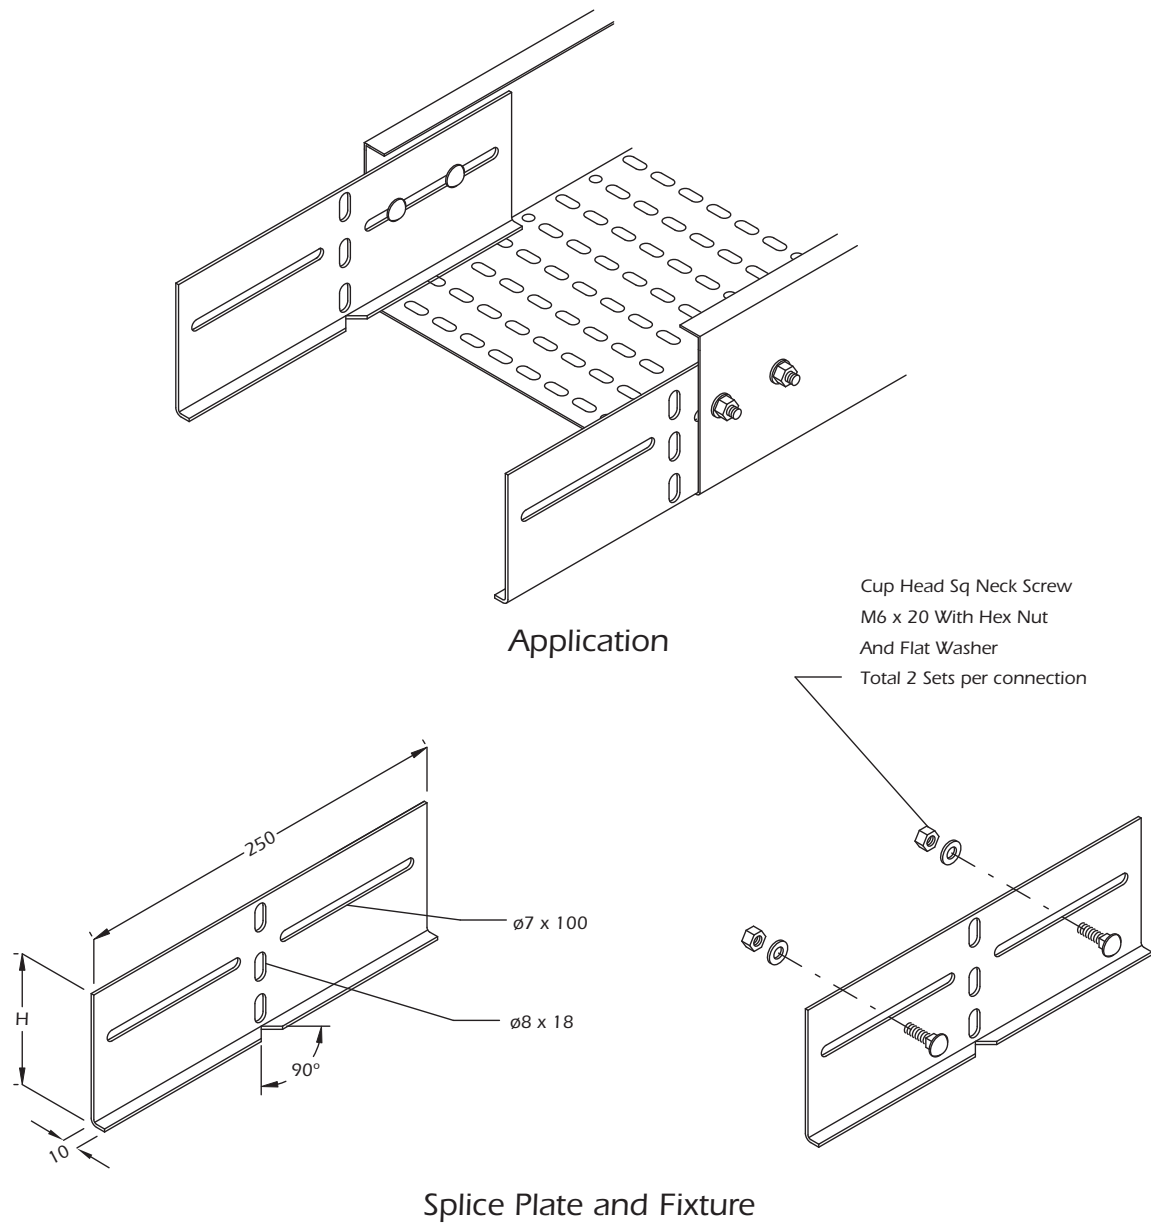

Components Ref.	Steel Perforated Tray Height	H	Finish
UL/TT/HP or UL/TC/HP-2	50	34	Hot Dip Galvanised Epoxy or Polyester Coated Stainless
UL/TT/HP or UL/TC/HP-3	75	59	
UL/TT/HP or UL/TC/HP-4	100	84	
UL/TT/HP or UL/TC/HP-6	150	134	


Dimension in Millimetre

When ordering please indicate Type, Finish and Sizes as in straight cable tray.


Steel Perforated Cable Tray

Steel Perforated Cable Tray - End Cap


Type: UL/TT/EP or UL/TC/EP

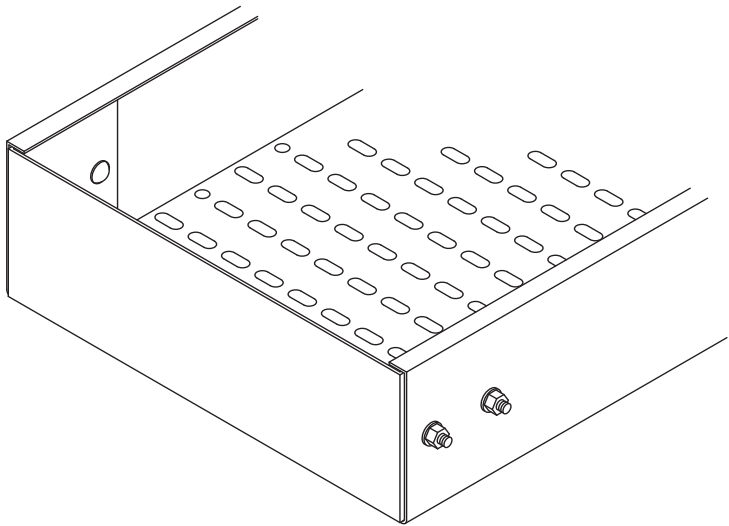

Application

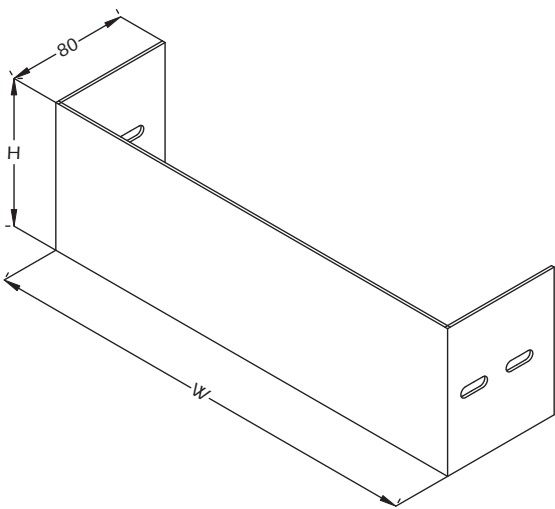

Cup Head Sq Neck Screw
M6 x 20 With Hex Nut
And Flat Washer
Total 4 Sets per connection

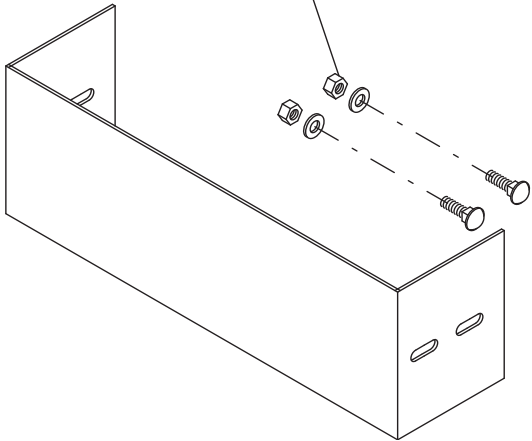

End Cap and Fixture

Components Ref.	Steel Perforated Tray Height	H	W	Finish
UL/TT/EP or UL/TC/EP-1	50	46	To Fit Cable Tray With 2mm Clearance	Hot Dip Galvanised Epoxy or Polyester Coated Stainless
UL/TT/EP or UL/TC/EP-2	75	71		
UL/TT/EP or UL/TC/EP-3	100	96		
UL/TT/EP or UL/TC/EP-4	150	146		

Dimension in Millimetre


Abbreviation. W - Width H - Height

When ordering please indicate Type, Finish and Sizes as in straight cable tray.

Steel Perforated Cable Tray

Steel Perforated Cable Tray - Straight Cover

Type: UL/TT/SC or UL/TC/SC

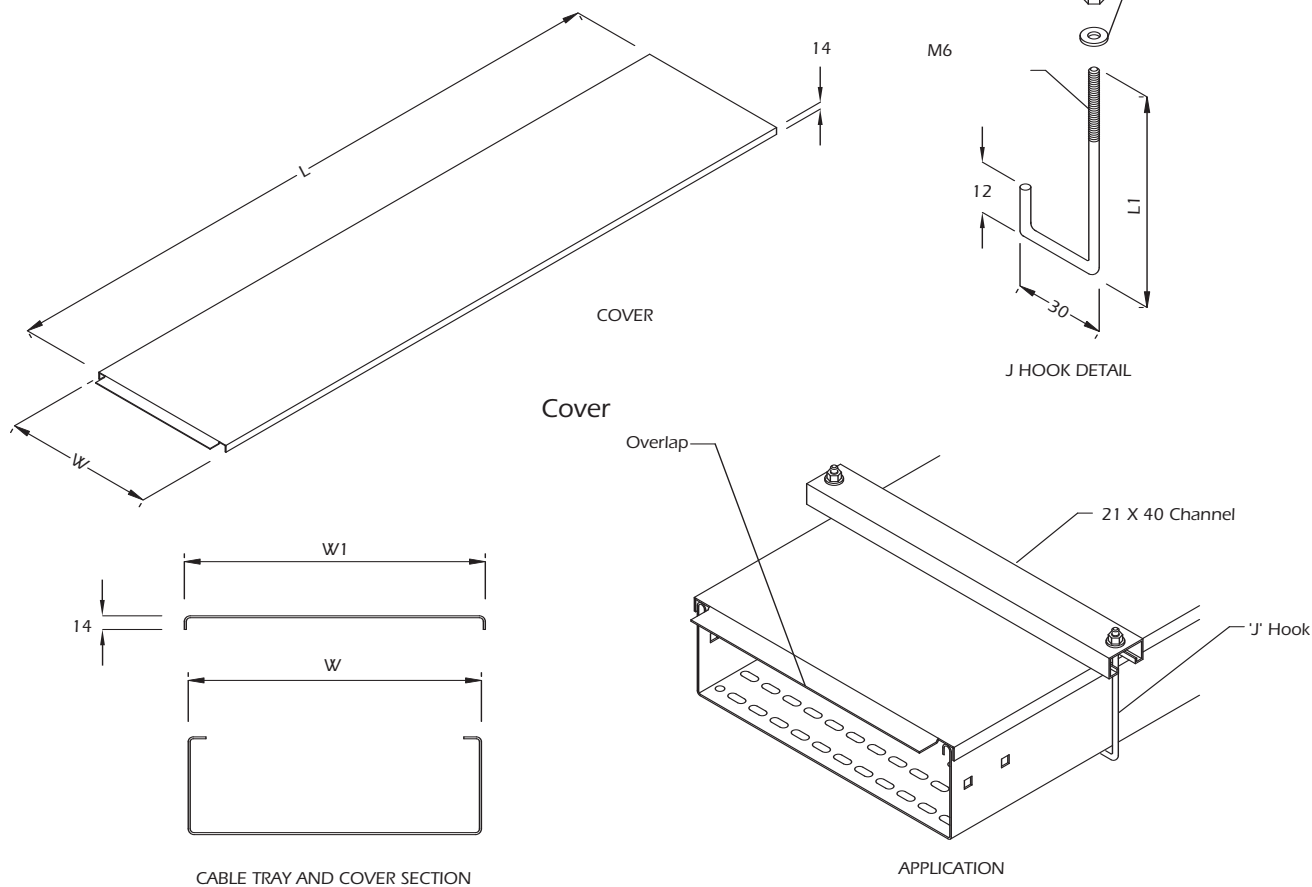

Components Ref.	W	W1	Thickness	L	Finish
UL/TT/SC-1	150	158	1.5	1500 or 3000	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/TT/SC-2	200	208	1.5		
UL/TT/SC-3	250	258	1.5		
UL/TT/SC-4	300	308	1.5		
UL/TT/SC-5	150	158	1.5		
UL/TT/SC-6	200	208	1.5		
UL/TT/SC-7	250	258	1.5		
UL/TT/SC-8	300	308	1.5		
UL/TT/SC-9	150	158	2.0		
UL/TT/SC-10	200	208	2.0		
UL/TT/SC-11	250	258	2.0		
UL/TT/SC-12	300	308	2.0		
UL/TT/SC-13	400	408	2.0		
UL/TT/SC-14	450	458	2.0		
UL/TT/SC-15	500	508	2.0		
UL/TT/SC-16	600	608	2.0		
UL/TT/SC-17	750	758	2.0		
UL/TT/SC-18	900	908	2.0		
UL/TT/SC-19	1000	1008	2.0		
UL/TT/SC-20	200	208	2.0		


Components Ref.	W	W1	Thickness	L	Finish
UL/TT/SC-21	250	258	2.0	1500 or 3000	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/TT/SC-22	300	308	2.0		
UL/TT/SC-23	400	408	2.0		
UL/TT/SC-24	450	458	2.0		
UL/TT/SC-25	500	508	2.0		
UL/TT/SC-26	600	608	2.0		
UL/TT/SC-27	750	758	2.0		
UL/TT/SC-28	900	908	2.0		
UL/TT/SC-29	1000	1008	2.0		
UL/TT/SC-30	200	208	2.0		
UL/TT/SC-31	250	258	2.0		
UL/TT/SC-32	300	308	2.0		
UL/TT/SC-33	400	408	2.0		
UL/TT/SC-34	450	458	2.0		
UL/TT/SC-35	500	508	2.0		
UL/TT/SC-36	600	608	2.0		
UL/TT/SC-37	750	758	2.0		
UL/TT/SC-38	800	808	2.0		
UL/TT/SC-39	900	908	2.0		
UL/TT/SC-40	1000	1008	2.0		

Components Ref.	Description	L1
UL/TT/CMP	Cable Ladder Cover Clamp	To Fit Cable Ladder Height


Dimension in Millimetre
When ordering please indicate Length (L) and Finish.

Steel Perforated Cable Tray


Steel Perforated Cable Tray - Accessories Angular Type

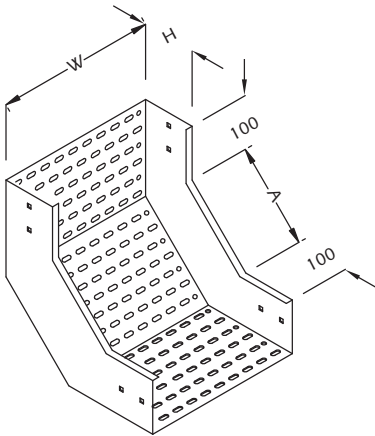


Type: UL/TT/AT-1

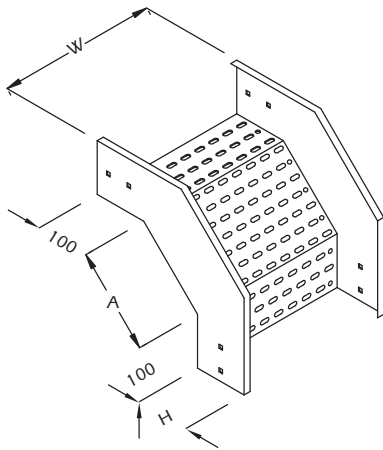


Type: UL/TT/AT-2

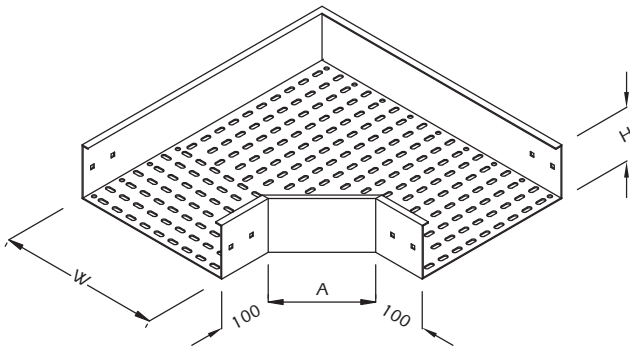


Type: UL/TT/AT-3

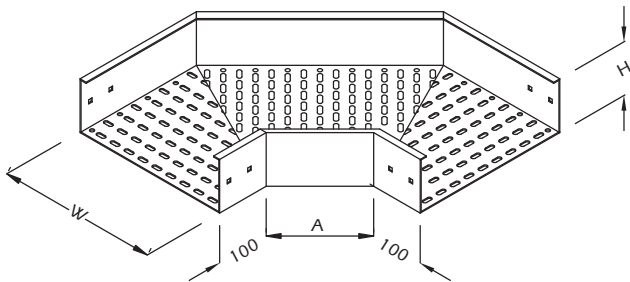

Type: UL/TT/AT-4

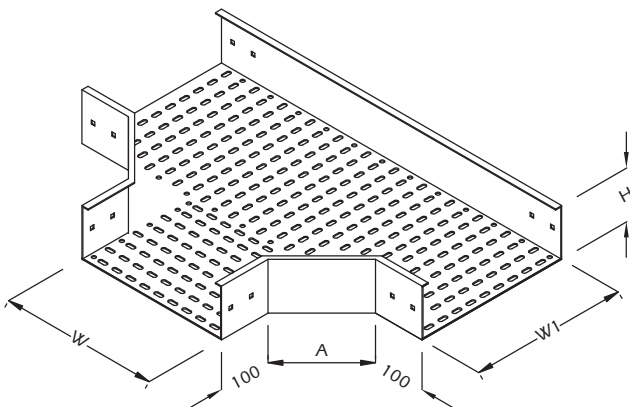

Type: UL/TT/AT-5

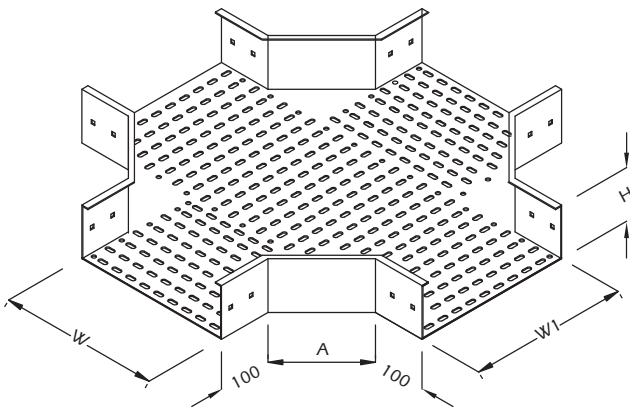

Type: UL/TT/AT-6



Components Ref.	H	A	W-W1
UL/TT/AT	50	100	Width
	75	100	
	100	100	
	150	150	

Dimension in Millimetre


When ordering please indicate Type, Finish and Sizes as in straight cable tray.

Steel Perforated Cable Tray

Steel Perforated Cable Tray - Straight
Type: UL/TR/ST

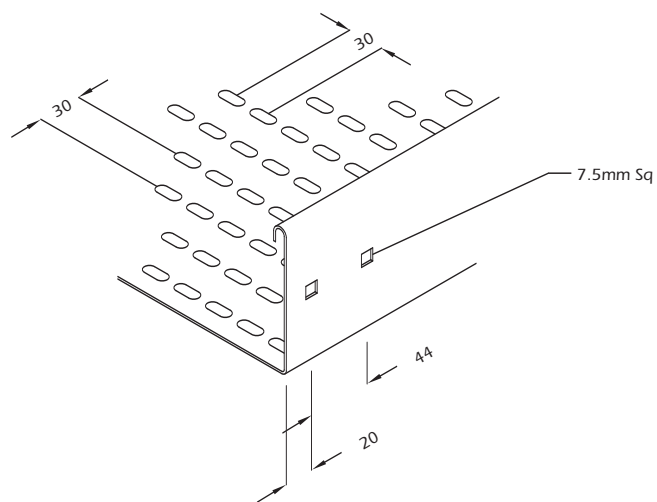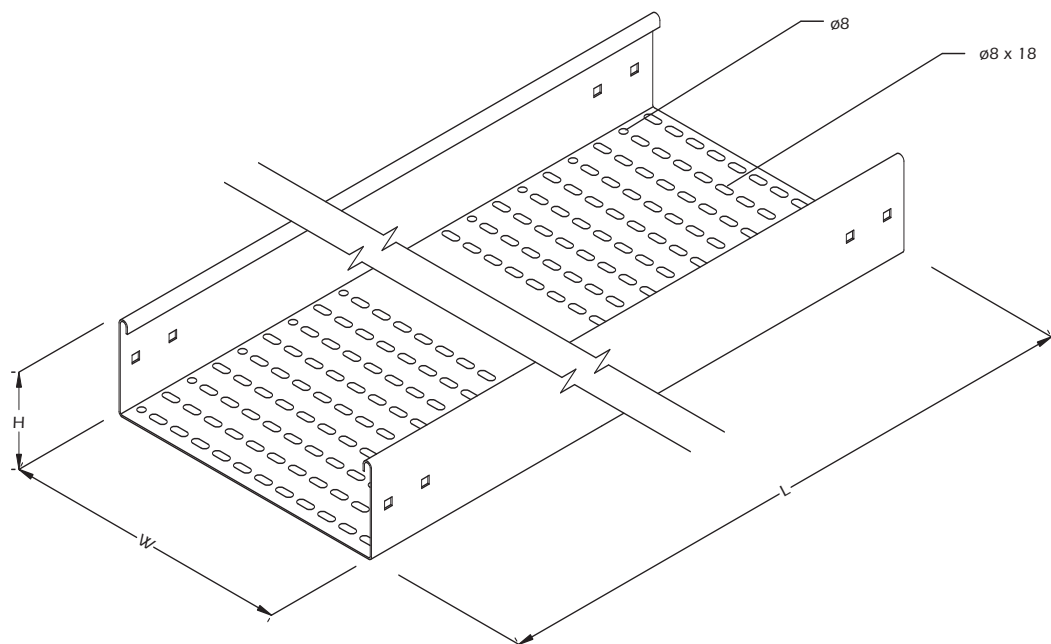

CONNECTION SLOT DETAIL

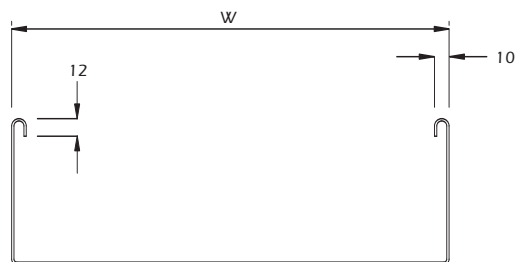

TRAY SECTION

Dimension in Millimetre

Steel Perforated Cable Tray

Steel Perforated Cable Tray - Straight

Type: UL/TR/ST

Components Ref.	H	W	Thickness	L	Finish
UL/TR/ST/2-2	50	50	1.5	2440 or 3000	Hot Dip Galvanised Epoxy or Polyester Coated - Stainless
UL/TR/ST/2-4	50	100	1.5		
UL/TR/ST/2-6	50	150	1.5		
UL/TR/ST/2-8	50	200	1.5		
UL/TR/ST/2-10	50	250	1.5		
UL/TR/ST/2-12	50	300	1.5		
UL/TR/ST/2-14	50	350	1.5		
UL/TR/ST/2-16	50	400	1.5		
UL/TR/ST/2-18	50	450	2.0		
UL/TR/ST/2-20	50	500	2.0		
UL/TR/ST/2-22	50	550	2.0		
UL/TR/ST/2-24	50	600	2.0		
UL/TR/ST/2-26	50	650	2.0		
UL/TR/ST/2-28	50	700	2.0		
UL/TR/ST/2-30	50	750	2.0		
UL/TR/ST/2-34	50	850	2.0		
UL/TR/ST/2-36	50	900	2.0		
UL/TR/ST/2-38	50	950	2.0		
UL/TR/ST/2-40	50	1000	2.0		
UL/TR/ST/3-3	75	75	1.5		
UL/TR/ST/3-4	75	100	1.5		
UL/TR/ST/3-6	75	150	1.5		
UL/TR/ST/3-8	75	200	1.5		
UL/TR/ST/3-10	75	250	1.5		
UL/TR/ST/3-12	75	300	1.5		
UL/TR/ST/3-14	75	350	1.5		
UL/TR/ST/3-16	75	400	1.5		
UL/TR/ST/3-18	75	450	2.0		
UL/TR/ST/3-20	75	500	2.0		
UL/TR/ST/3-22	75	550	2.0		
UL/TR/ST/3-24	75	600	2.0		
UL/TR/ST/3-26	75	650	2.0		
UL/TR/ST/3-28	75	700	2.0		
UL/TR/ST/3-30	75	750	2.0		
UL/TR/ST/3-34	75	850	2.0		
UL/TR/ST/3-36	75	900	2.0		
UL/TR/ST/3-38	75	950	2.0		
UL/TR/ST/3-40	75	1000	2.0		
UL/TR/ST/4-4	100	100	1.5		
UL/TR/ST/4-6	100	150	1.5		
UL/TR/ST/4-8	100	200	1.5		
UL/TR/ST/4-10	100	250	1.5		
UL/TR/ST/4-12	100	300	1.5		
UL/TR/ST/4-14	100	350	2.0		
UL/TR/ST/4-16	100	400	2.0		

Components Ref.	H	W	Thickness	L	Finish
UL/TR/ST/4-18	100	450	2.0	2440 or 3000	Hot Dip Galvanised Epoxy or Polyester Coated - Stainless
UL/TR/ST/4-20	100	500	2.0		
UL/TR/ST/4-22	100	550	2.0		
UL/TR/ST/4-24	100	600	2.0		
UL/TR/ST/4-26	100	650	2.0		
UL/TR/ST/4-28	100	700	2.0		
UL/TR/ST/4-30	100	750	2.0		
UL/TR/ST/4-32	100	800	2.0		
UL/TR/ST/4-34	100	850	2.0		
UL/TR/ST/4-36	100	900	2.0		
UL/TR/ST/4-38	100	950	2.0		
UL/TR/ST/4-40	100	1000	2.0		
UL/TR/ST/5-6	125	150	1.5		
UL/TR/ST/5-8	125	200	1.5		
UL/TR/ST/5-10	125	250	1.5		
UL/TR/ST/5-12	125	300	1.5		
UL/TR/ST/5-14	125	350	2.0		
UL/TR/ST/5-16	125	400	2.0		
UL/TR/ST/5-18	125	450	2.0		
UL/TR/ST/5-20	125	500	2.0		
UL/TR/ST/5-22	125	550	2.0		
UL/TR/ST/5-24	125	600	2.0		
UL/TR/ST/5-26	125	650	2.0		
UL/TR/ST/5-28	125	700	2.0		
UL/TR/ST/5-30	125	750	2.0		
UL/TR/ST/5-32	125	800	2.0		
UL/TR/ST/5-34	125	850	2.0		
UL/TR/ST/5-36	125	900	2.0		
UL/TR/ST/5-38	125	950	2.0		
UL/TR/ST/6-6	150	150	1.5		
UL/TR/ST/6-8	150	200	1.5		
UL/TR/ST/6-10	150	250	1.5		
UL/TR/ST/6-12	150	300	1.5		
UL/TR/ST/6-14	150	350	2.0		
UL/TR/ST/6-16	150	400	2.0		
UL/TR/ST/6-18	150	450	2.0		
UL/TR/ST/6-20	150	500	2.0		
UL/TR/ST/6-22	150	550	2.0		
UL/TR/ST/6-24	150	600	2.0		
UL/TR/ST/6-26	150	650	2.0		
UL/TR/ST/6-28	150	700	2.0		
UL/TR/ST/6-30	150	750	2.0		
UL/TR/ST/6-32	150	800	2.0		
UL/TR/ST/6-34	150	850	2.0		
UL/TR/ST/6-36	150	900	2.0		

Dimension in Millimetre


Abbreviation. W - Width H - Height L - Length

We also supply other sizes with the same Cable Tray profile.

Steel Perforated Cable Tray

Steel Perforated Cable Tray - 90° Elbow

Type: UL/TR/EL90

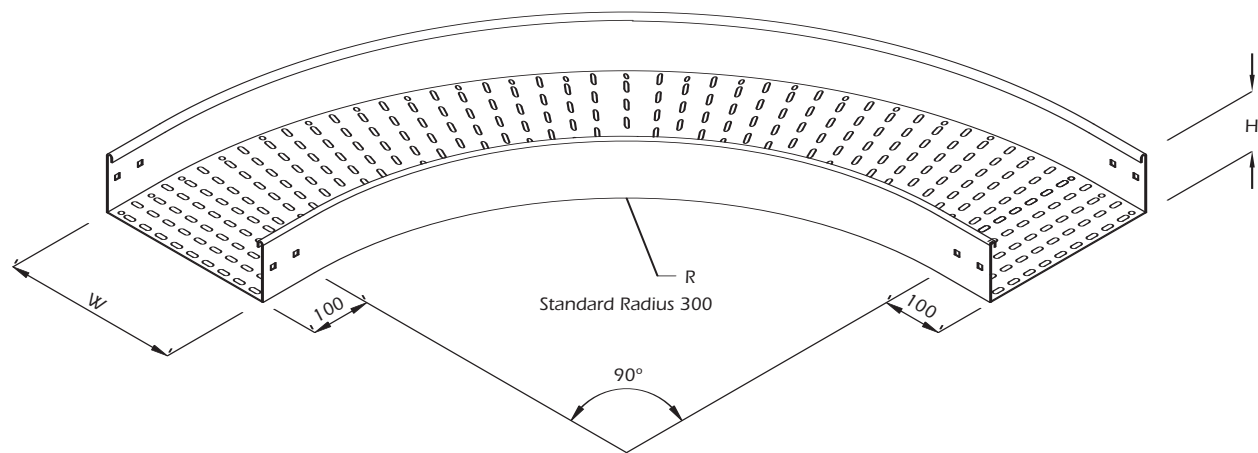


Dimension in Millimetre

Abbreviation. W - Width H - Height R - Radius

When ordering Material, Finish and sizes as straight cable tray please also indicate Radius (R)

Steel Perforated Cable Tray - 45° Elbow

Type: UL/TR/EL45

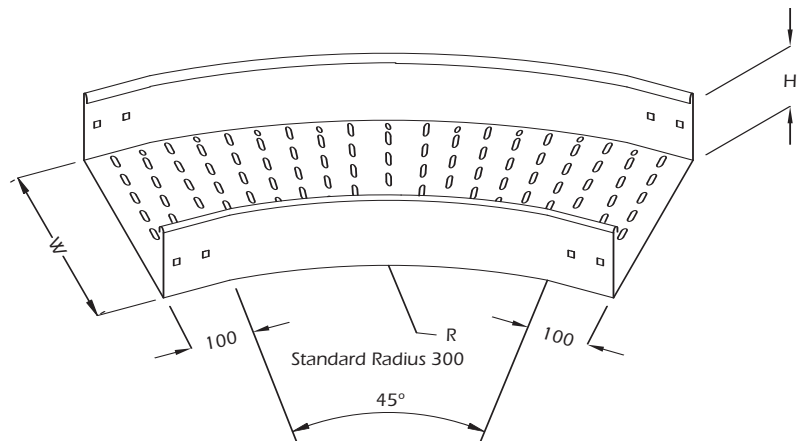

Dimension in Millimetre


Abbreviation. W - Width H - Height R - Radius

When ordering Material, Finish and sizes as straight cable tray please also indicate Radius (R)

Steel Perforated Cable Tray

Steel Perforated Cable Tray - Horizontal Equal Tee

Type: UL/TR/ET

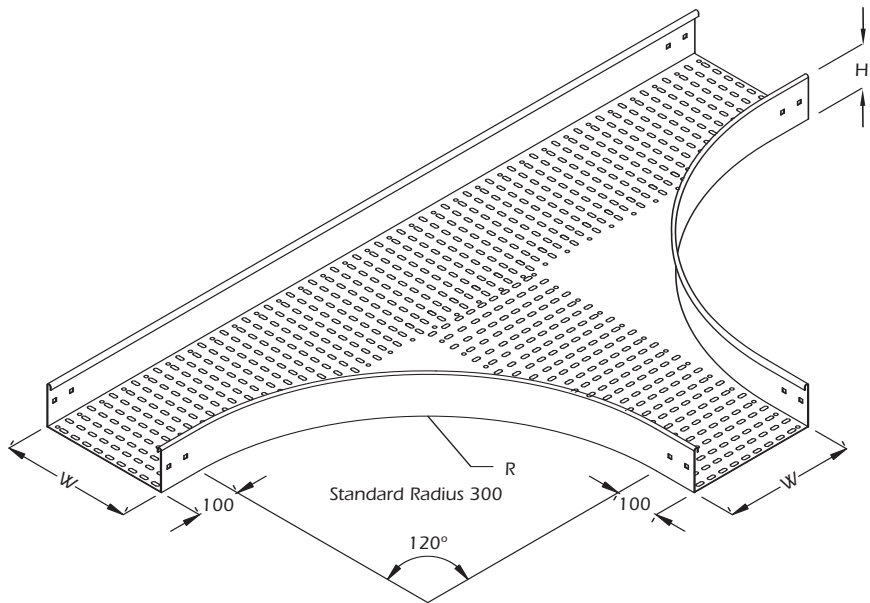


Dimension in Millimetre

Abbreviation. W - Width H - Height R - Radius

When ordering Material, Finish and sizes as straight cable tray please also indicate Radius (R)

Steel Perforated Cable Tray - Horizontal Unequal Tee

Type: UL/TR/UT

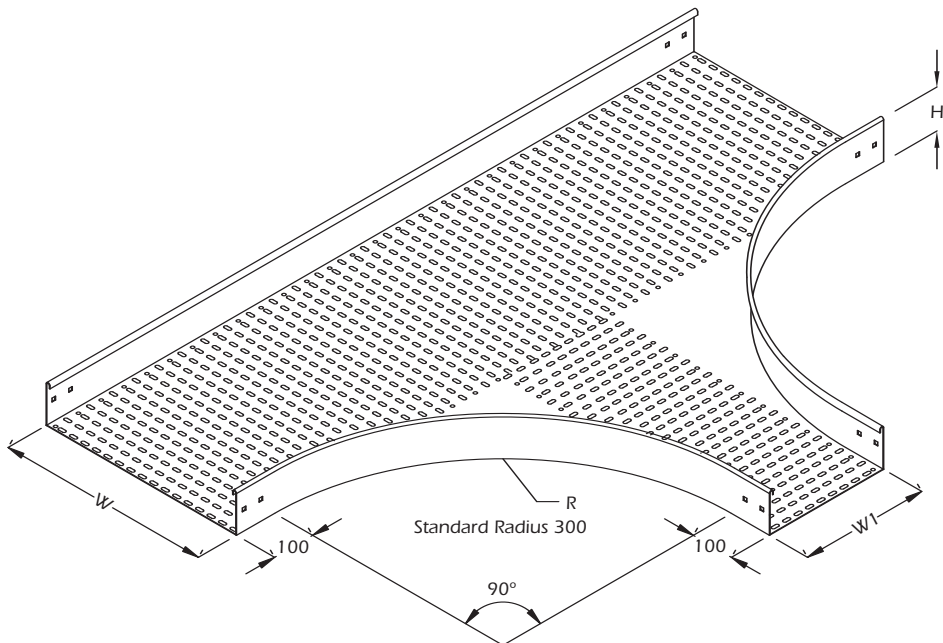

Dimension in Millimetre


Abbreviation. W - Width W1 - Width H - Height R - Radius

When ordering Material, Finish and sizes as straight cable tray please also indicate Radius (R) and Width (W1)

Steel Perforated Cable Tray

Steel Perforated Cable Tray - Horizontal Equal Cross

Type: UL/TR/EC

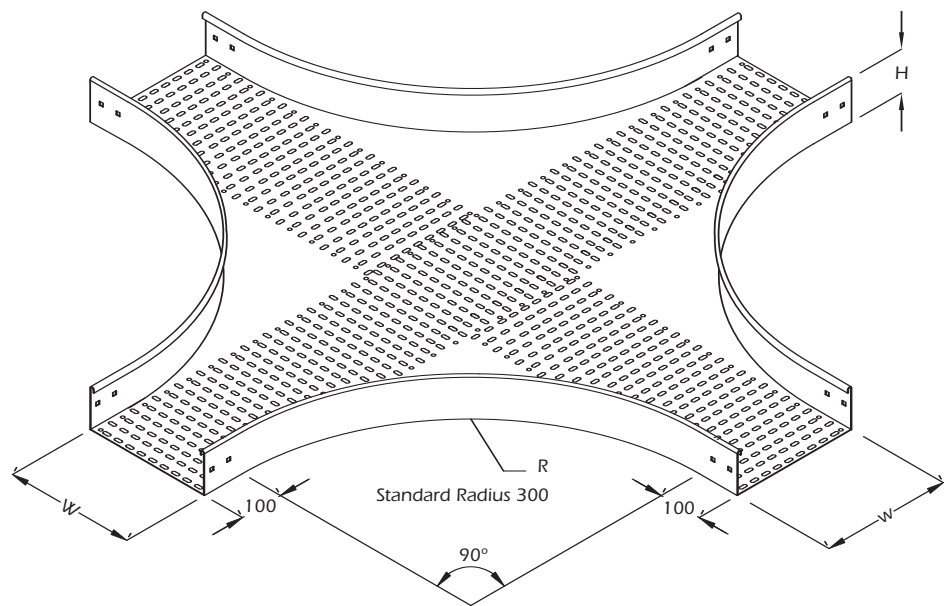


Dimension in Millimetre

Abbreviation. W - Width H - Height R - Radius

When ordering Material, Finish and sizes as straight cable tray please also indicate Radius (R)

Steel Perforated Cable Tray - Horizontal Unequal Cross

Type: UL/TR/UC

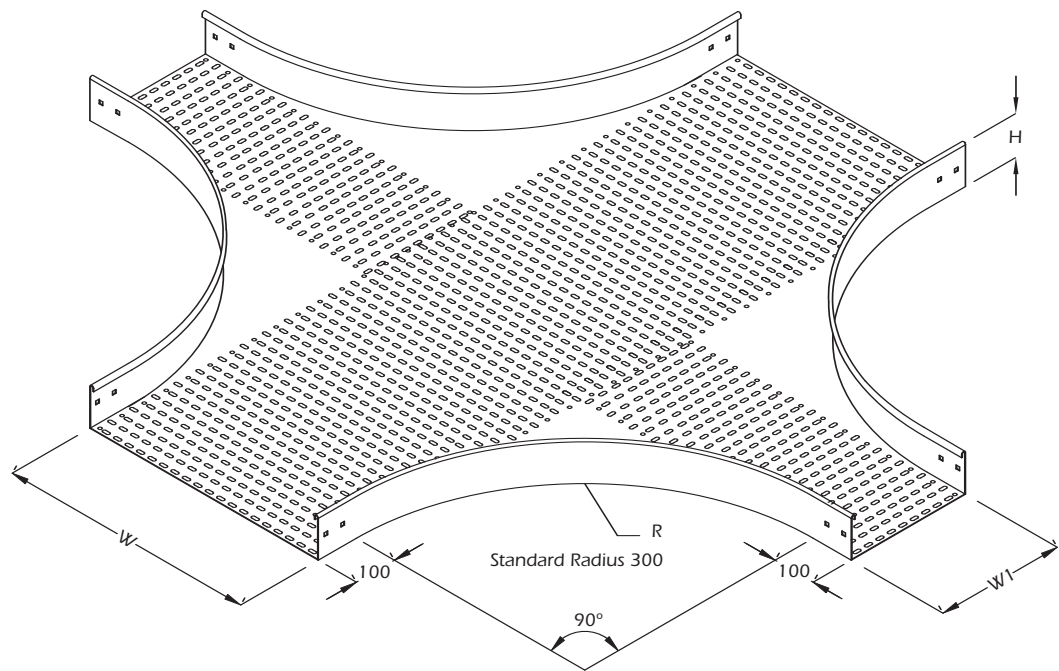

Dimension in Millimetre


Abbreviation. W - Width H - Height R - Radius

When ordering Material, Finish and sizes as straight cable tray please also indicate Radius (R) and Width (W1)

Steel Perforated Cable Tray

Steel Perforated Cable Tray - External Riser

Type: UL/TR/ER

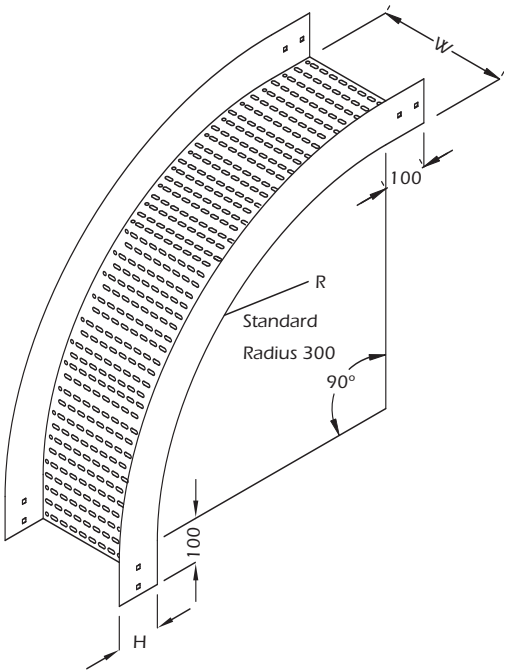


Dimension in Millimetre

Abbreviation. W - Width H - Height R - Radius

When ordering Material, Finish and sizes as straight cable tray please also indicate Radius (R)

Steel Perforated Cable Tray - Internal Riser

Type: UL/TR/IR

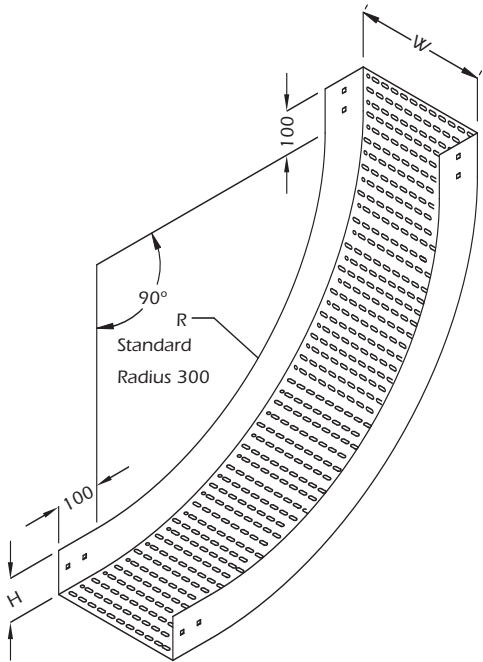

Dimension in Millimetre


Abbreviation. W - Width H - Height R - Radius

When ordering Material, Finish and sizes as straight cable tray please also indicate Radius (R)

Steel Perforated Cable Tray

Steel Perforated Cable Tray - Right Offset Reducer

Type: UL/TR/RR

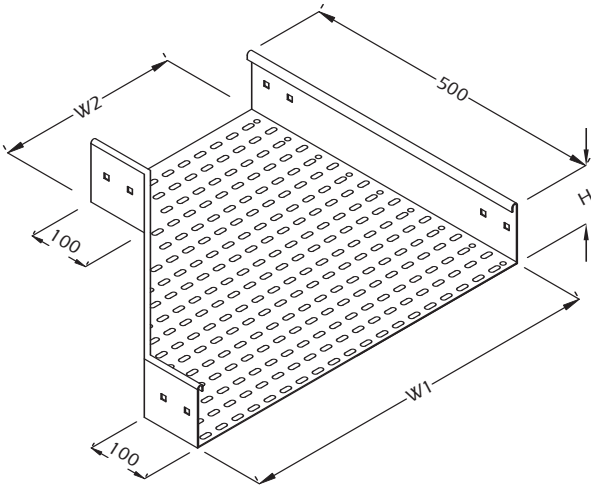


Dimension in Millimetre

Abbreviation. W - Width H - Height

When ordering Material, Finish and sizes as straight cable tray please also indicate Width (W2)

Steel Perforated Cable Tray - Left Offset Reducer

Type: UL/TR/LR

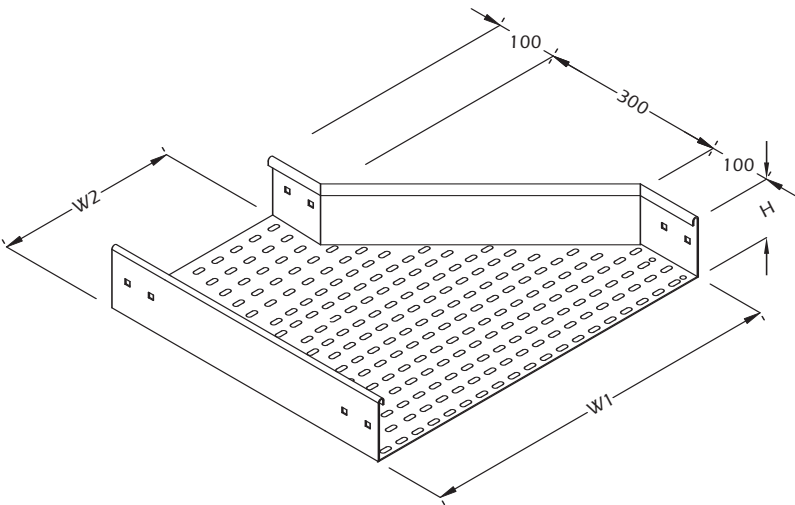

Dimension in Millimetre


Abbreviation. W - Width H - Height

When ordering Material, Finish and sizes as straight cable tray please also indicate Width (W2)

Steel Perforated Cable Tray

Steel Perforated Tray - Straight Offset Reducer

Type: UL/TR/SR

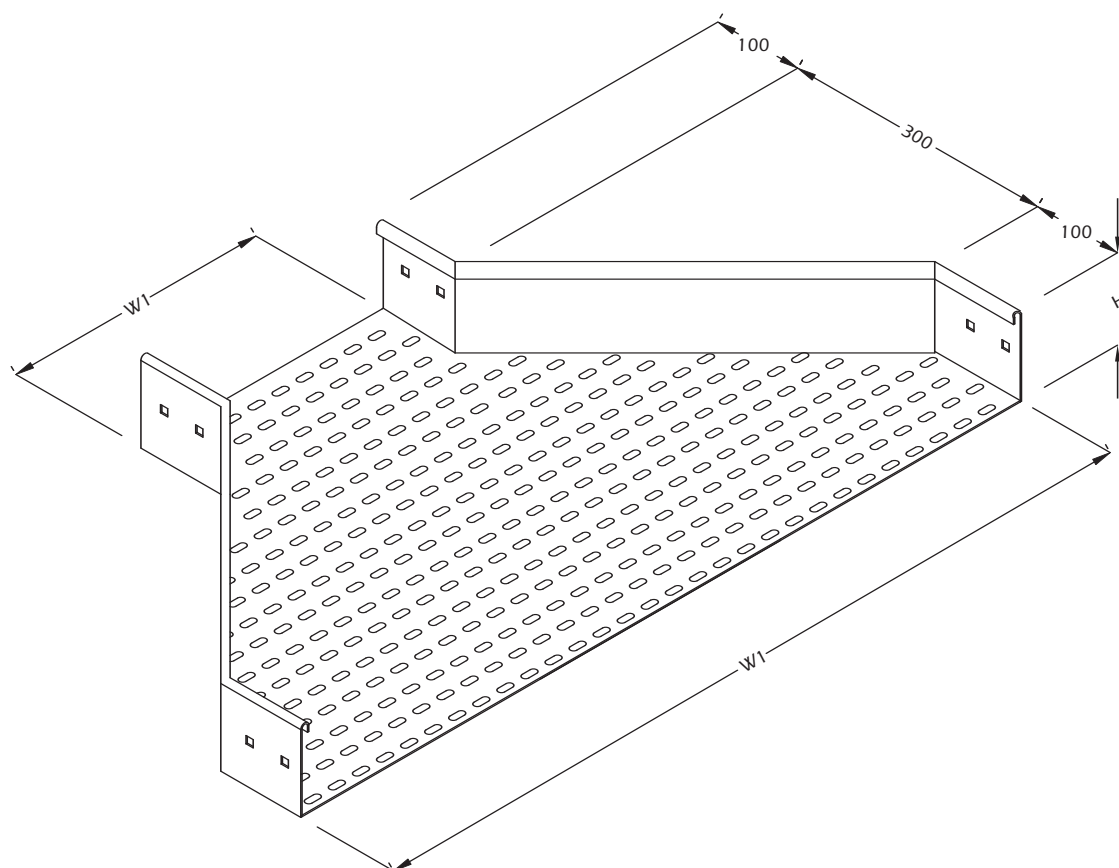

Dimension in Millimetre


Abbreviation. W - Width H - Height

When ordering Material, Finish and sizes as straight cable tray please also indicate Width (W2)



Steel Perforated Cable Tray

Steel Perforated Cable Tray - Horizontal Splice Plate

Type: UL/TR/HS

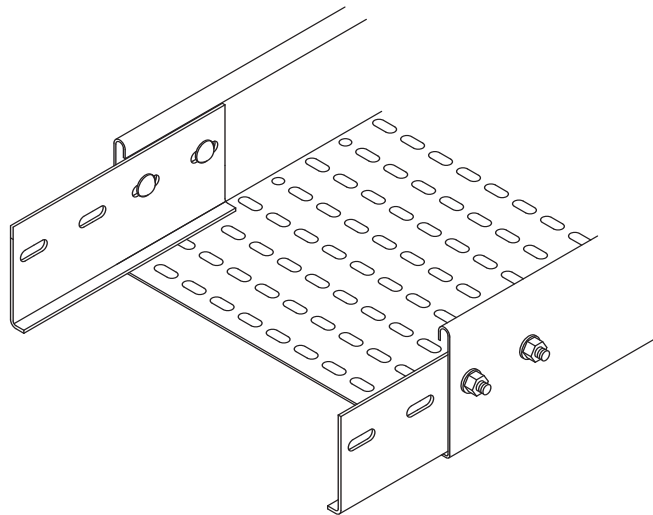

Application

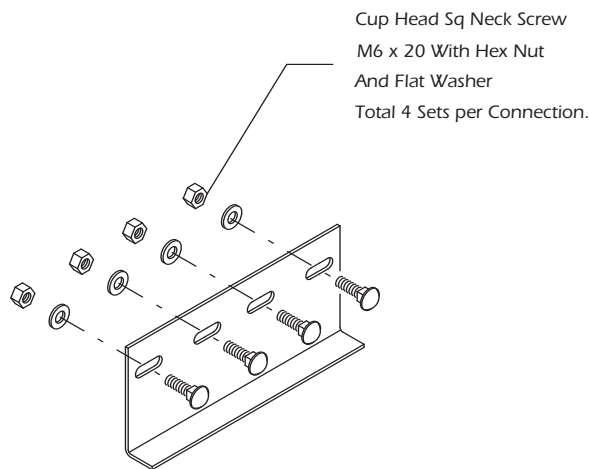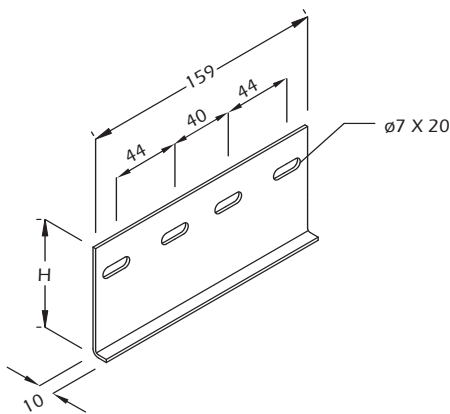

Splice Plate and Fixture

Components Ref.	Steel Perforated Tray Height	H	Finish
UL/TR/HS-2	50	34	Hot Dip Galvanised Epoxy or Polyester Coated Stainless
UL/TR/HS-3	75	59	
UL/TR/HS-4	100	84	
UL/TR/HS-6	150	134	


Dimension in Millimetre
Abbreviation. H - Height

Material and Finish as Straight Cable Tray


Steel Perforated Cable Tray

Steel Perforated Cable Tray - Vertical Adjustable Splice Plate

Type: UL/TR/VS

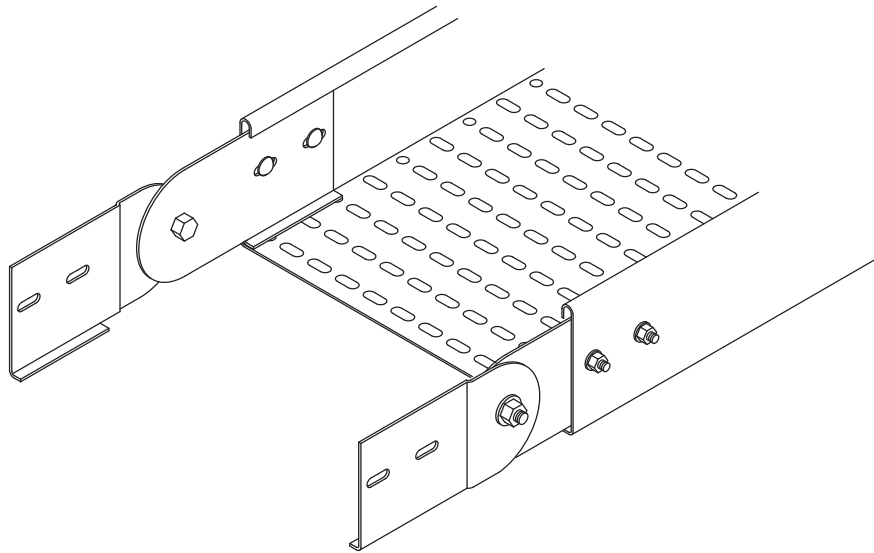

Application

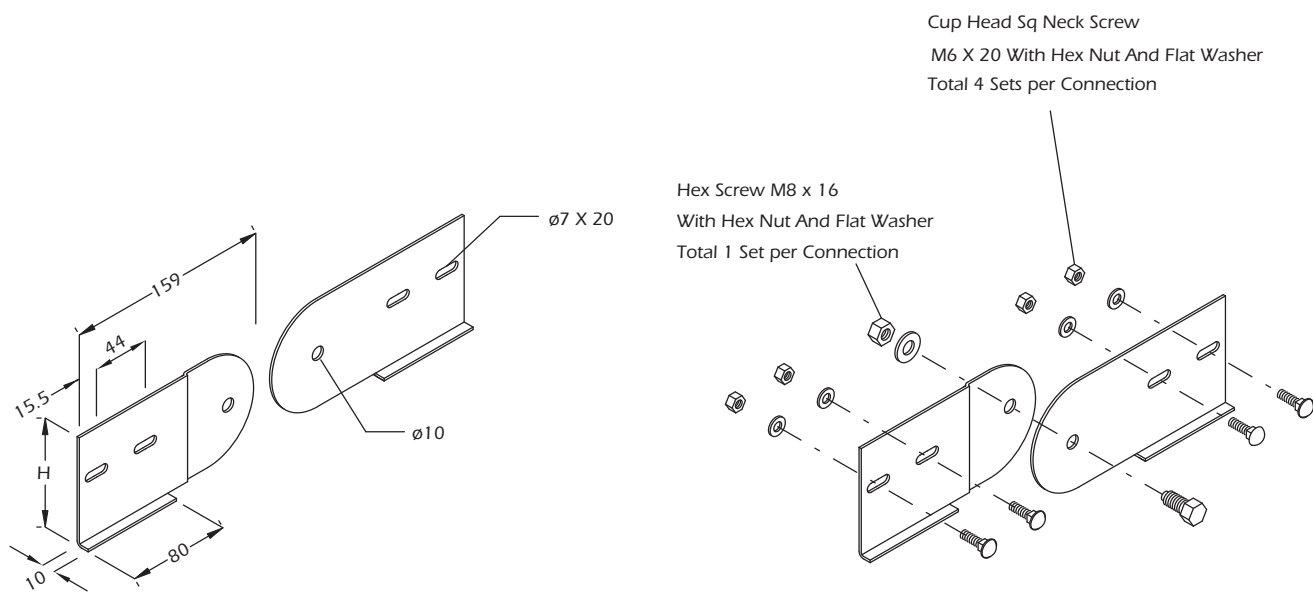

Splice Plate and Fixture

Components Ref.	Steel Perforated Tray Height	H	Finish
UL/TR/VS-2	50	34	Hot Dip Galvanised Epoxy or Polyester Coated Stainless
UL/TR/VS-3	75	59	
UL/TR/VS-4	100	84	
UL/TR/VS-6	150	134	


Dimension in Millimetre
Abbreviation. H - Height

Material and Finish as Straight Cable Tray


Steel Perforated Cable Tray

Steel Perforated Cable Tray - Horizontal Adjustable Splice Plate

Type: UL/TR/HP

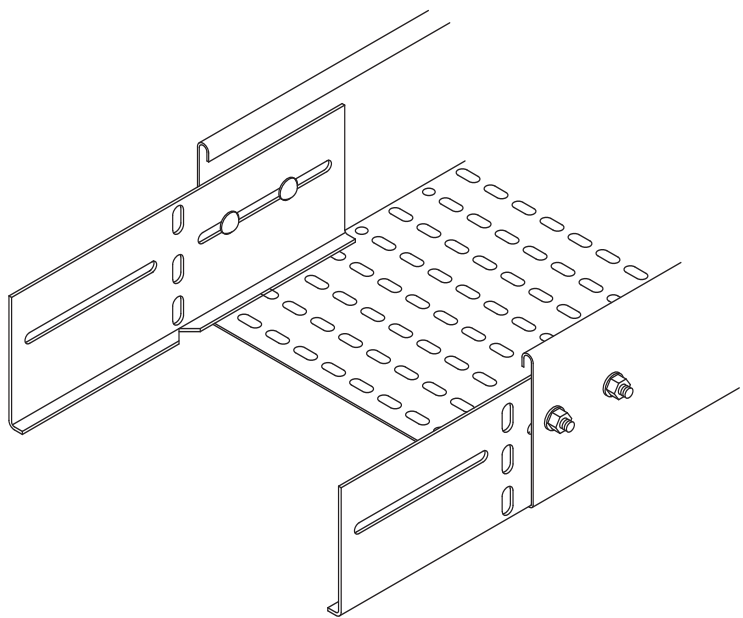

Application

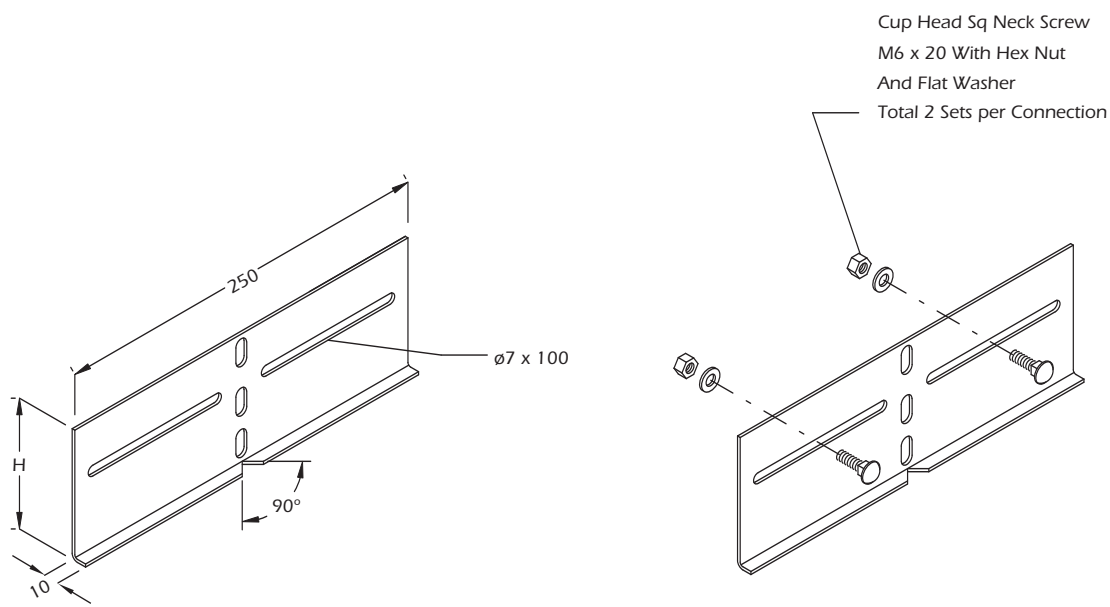

Splice Plate and Fixture

Components Ref.	Steel Perforated Tray Height	H	Finish
UL/TR/HP-2	50	34	Hot Dip Galvanised Epoxy or Polyester Coated Stainless
UL/TR/HP-3	75	59	
UL/TR/HP-4	100	84	
UL/TR/HP-6	150	134	


Dimension in Millimetre
Abbreviation. H - Height

Material and Finish as Straight Cable Tray


Steel Perforated Cable Tray

Steel Perforated Cable Tray - End Cap


Type: UL/TR/EP

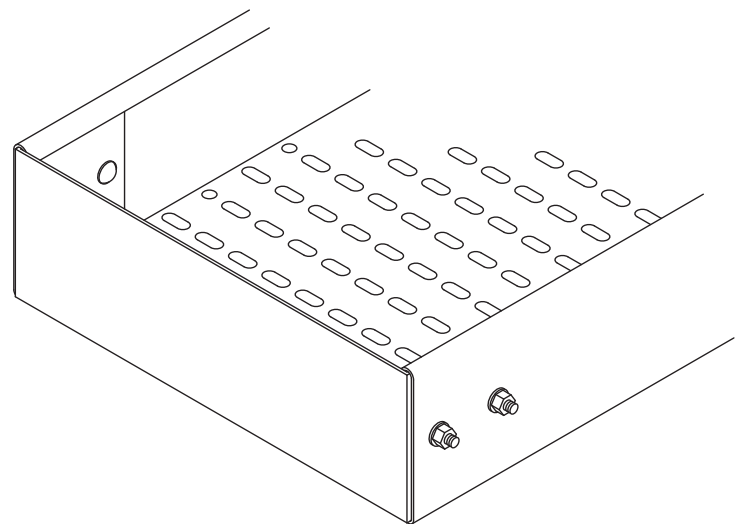

Application

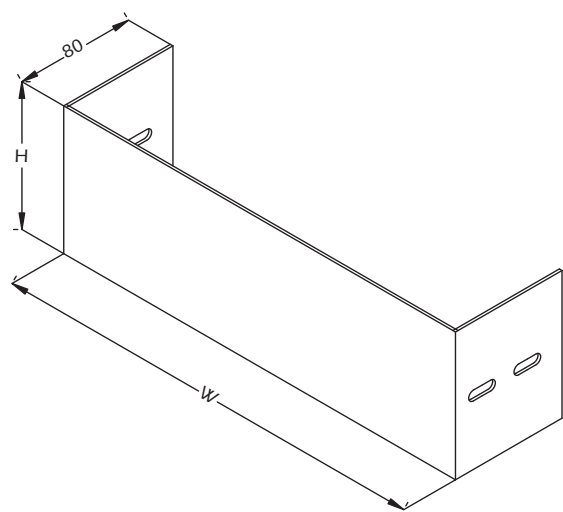

Cup Head Sq Neck Screw
M6 x 20 With Hex Nut
And Flat Washer
Total 4 Sets per End Plate

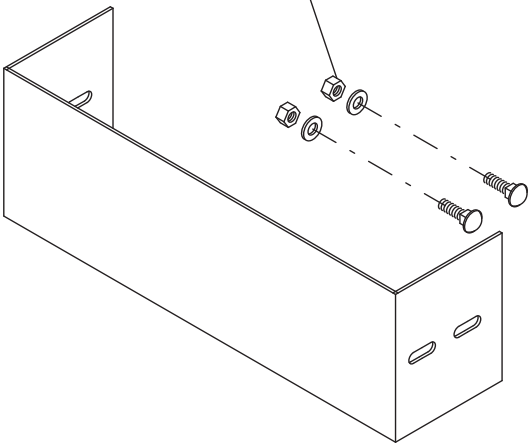

End Cap and Fixture

Components Ref.	Steel Perforated Tray Height	H	W	Finish
UL/TR/EP-2	50	46	To Fit Cable Tray With 2mm Clearance	Hot Dip Galvanised Epoxy or Polyester Coated Stainless
UL/TR/EP-3	75	71		
UL/TR/EP-4	100	96		
UL/TR/EP-6	150	146		


Dimension in Millimetre

Abbreviation. W - Width H - Height

Steel Perforated Cable Tray

Steel Perforated Cable Tray - Straight Cover

Type: UL/TR/SC

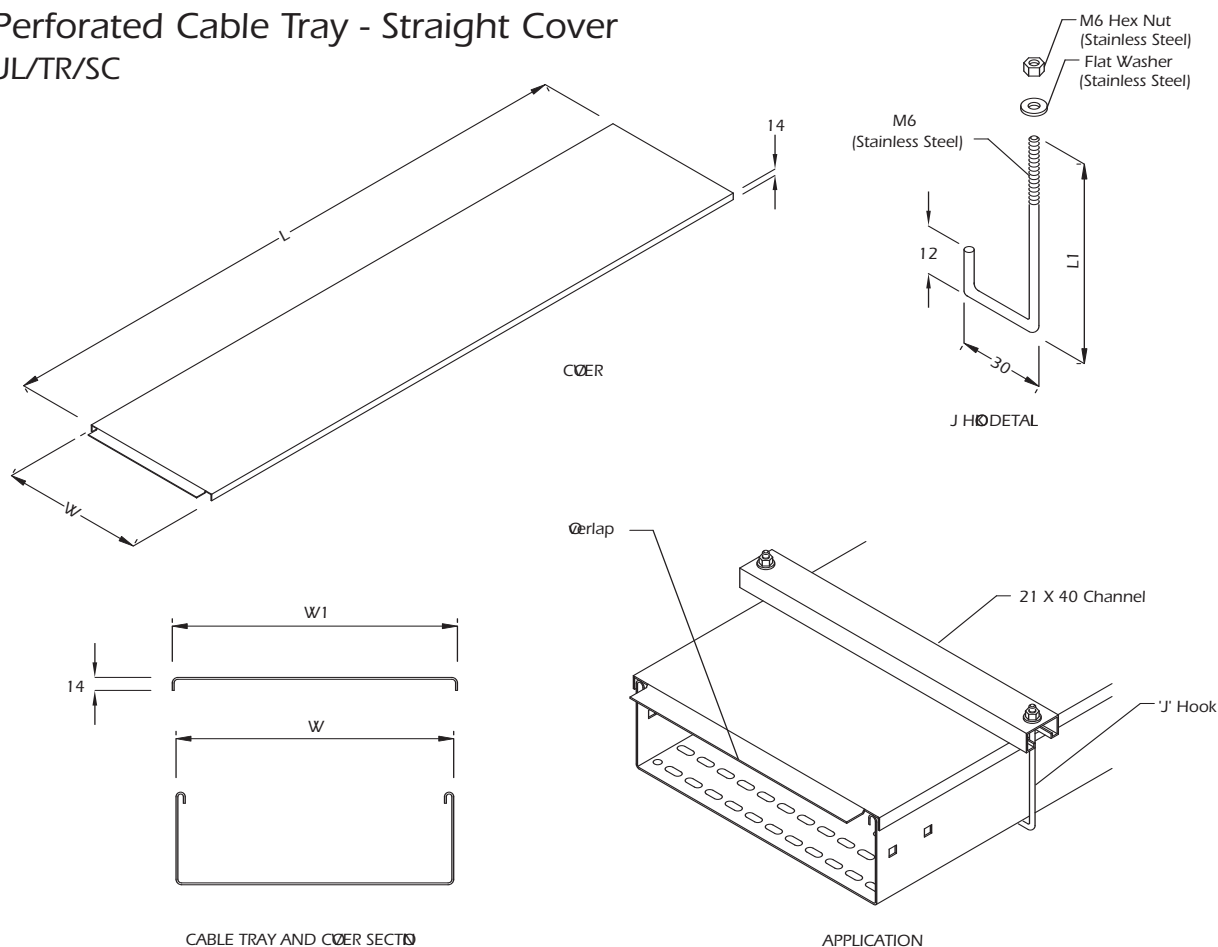

Components Ref.	W	W1	Thickness	L	Finish
UL/TR/SC-1	150	158	1.5	1500 or 3000	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/TR/SC-2	200	208	1.5		
UL/TR/SC-3	250	258	1.5		
UL/TR/SC-4	300	308	1.5		
UL/TR/SC-5	150	158	1.5		
UL/TR/SC-6	200	208	1.5		
UL/TR/SC-7	250	258	1.5		
UL/TR/SC-8	300	308	1.5		
UL/TR/SC-9	150	158	2.0		
UL/TR/SC-10	200	208	2.0		
UL/TR/SC-11	250	258	2.0		
UL/TR/SC-12	300	308	2.0		
UL/TR/SC-13	400	408	2.0		
UL/TR/SC-14	450	458	2.0		
UL/TR/SC-15	500	508	2.0		
UL/TR/SC-16	600	608	2.0		
UL/TR/SC-17	750	758	2.0		
UL/TR/SC-18	900	908	2.0		
UL/TR/SC-19	1000	1008	2.0		
UL/TR/SC-20	200	208	2.0		

Components Ref.	W	W1	Thickness	L	Finish
UL/TR/SC-21	250	258	2.0	1500 or 3000	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/TR/SC-22	300	308	2.0		
UL/TR/SC-23	400	408	2.0		
UL/TR/SC-24	450	458	2.0		
UL/TR/SC-25	500	508	2.0		
UL/TR/SC-26	600	608	2.0		
UL/TR/SC-27	750	758	2.0		
UL/TR/SC-28	900	908	2.0		
UL/TR/SC-29	1000	1008	2.0		
UL/TR/SC-30	200	208	2.0		
UL/TR/SC-31	250	258	2.0		
UL/TR/SC-32	300	308	2.0		
UL/TR/SC-33	400	408	2.0		
UL/TR/SC-34	450	458	2.0		
UL/TR/SC-35	500	508	2.0		
UL/TR/SC-36	600	608	2.0		
UL/TR/SC-37	750	758	2.0		
UL/TR/SC-38	800	808	2.0		
UL/TR/SC-39	900	908	2.0		
UL/TR/SC-40	1000	1008	2.0		


Components Ref.	Description	L1
UL/TR/CMP	Cable Ladder Cover Clamp	To Fit Cable Ladder Height

Dimension in Millimetre


When ordering please indicate Length (L) and Finish.

Steel Perforated Cable Tray


Steel Perforated Cable Tray - Accessories Angular Type

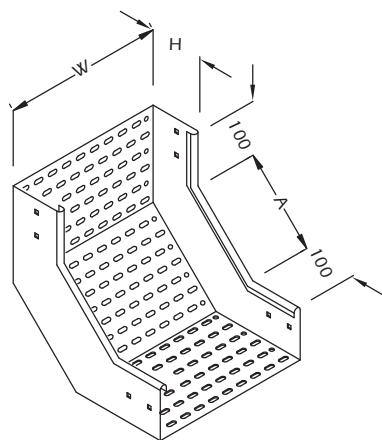


Type: UL/TR/AT-1

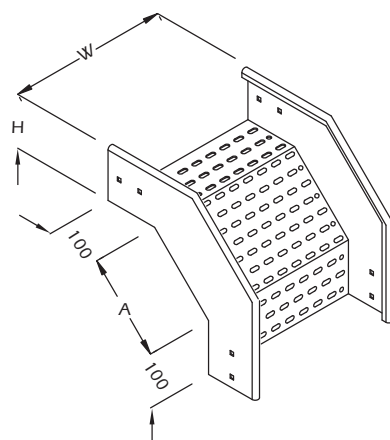


Type: UL/TR/AT-2

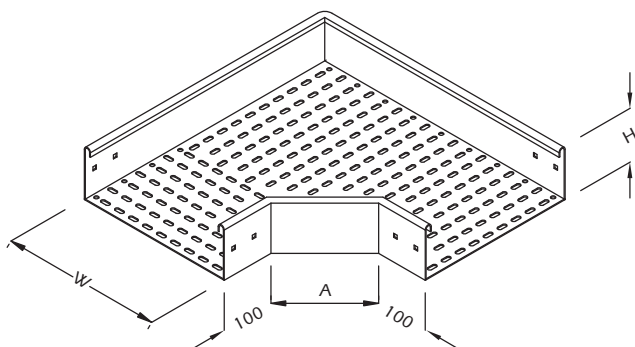


Type: UL/TR/AT-3

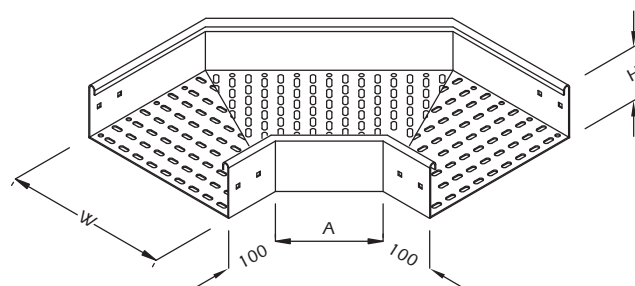

Type: UL/TR/AT-4

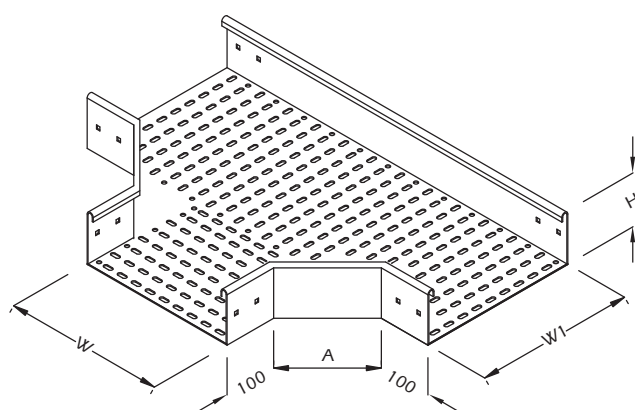

Type: UL/TR/AT-5

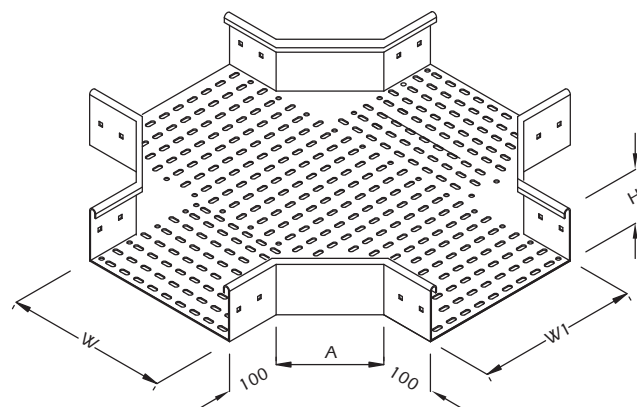

Type: UL/TR/AT-6


Components Ref.	H	A	W-W1
UL/TR/AT	50	100	Width
	75	100	
	100	100	
	150	150	

Dimension in Millimetre

When ordering please indicate Type, Finish and Sizes as in straight cable tray.



ULI™ Steel Cable Ladder Typical Layout

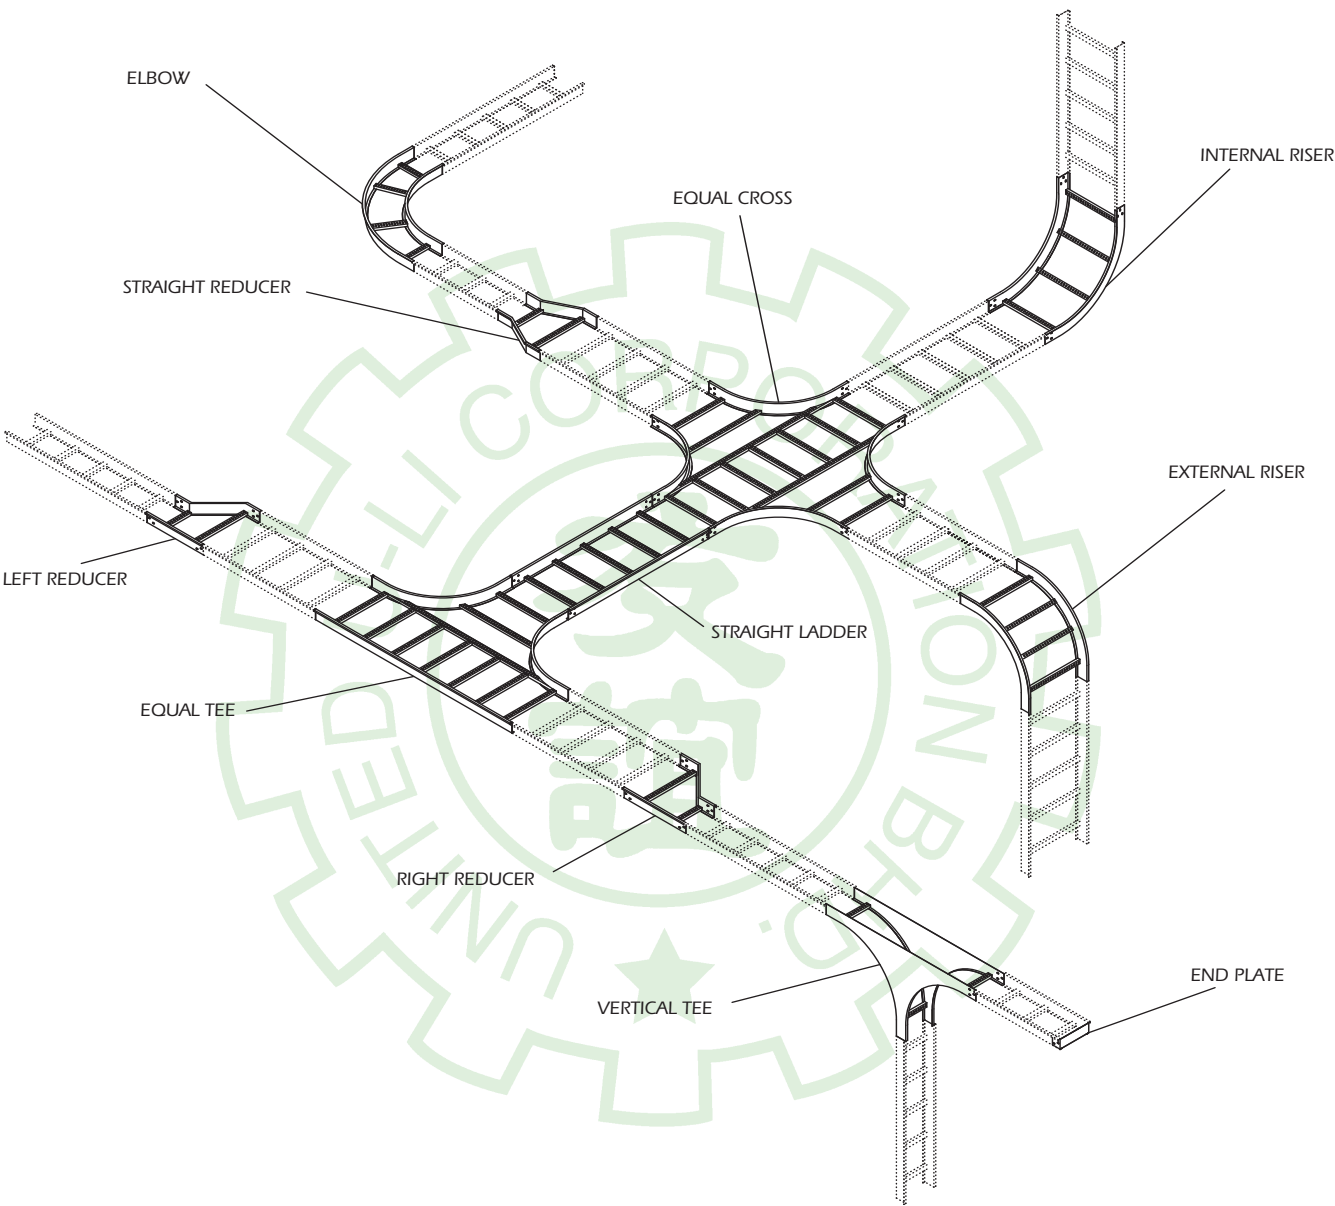

Steel Cable Ladder

U-LI™ Cable Ladder Product Range

U-LI™ design of Cable Ladder is compact and fast to install, with both straight Cable Ladder and all accessories having a unique integrated coupling system.

U-LI™ offers a wide range of options to suit your design and with load rated to NEMA VE1. We also manufacture Extra Heavy Duty Cable Ladder upon request.

U-LI™ offers multi side rails, rungs and slots profile for your design needs and applications. It has the advantage of quick on site installation, cut to length and reconnection.

U-LI™ offers a wide range of materials to suit the site condition and also choices of final finishes.




Materials:

1. Hot roll mild steel. JISG 3131 SPHC
2. Cold roll mild steel. JISG 3141 SPCC - SD
3. Pre-Galvanised Steel BS 2989 or JISG 3302 SGCC
4. Electro-Galvanised. BS 1449 Pt 1:1983
5. Stainless steel. AISI 304, 316 or 316L
6. Aluminium.

Materials thickness range from 1mm thick to 3mm thick.

Finishing:

1. Hot dip galvanised.
ASTM A123, BS EN ISO 1461:1999
2. Epoxy coated - ASTM D 1654, BS 6920
3. Polyester coated - ASTM D 1654, BS 6920

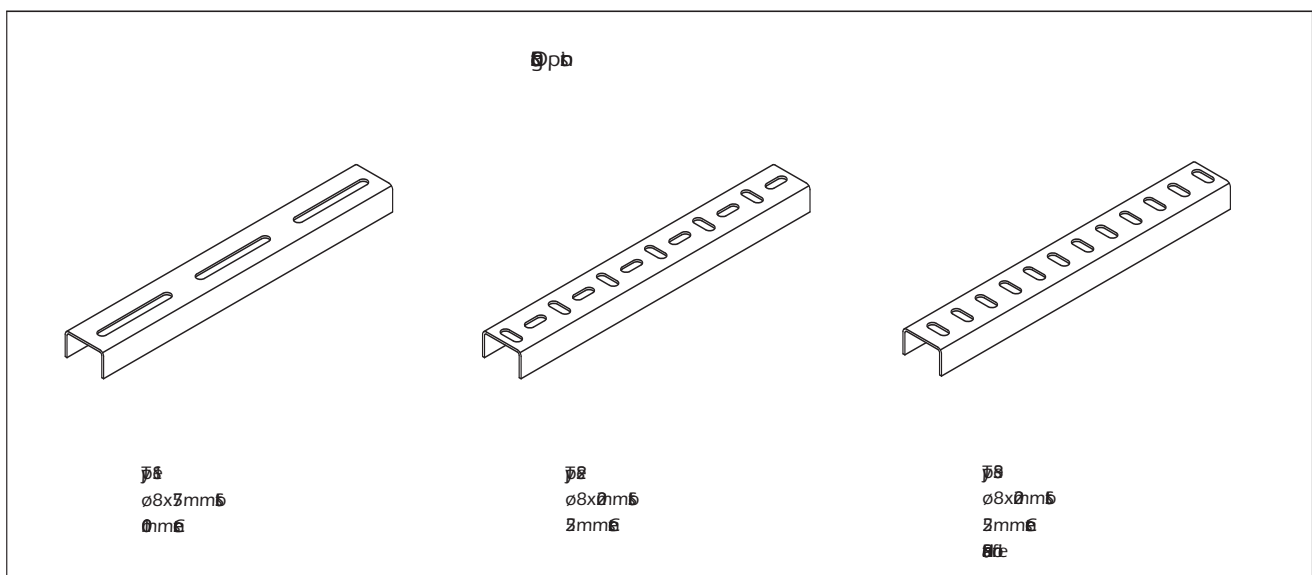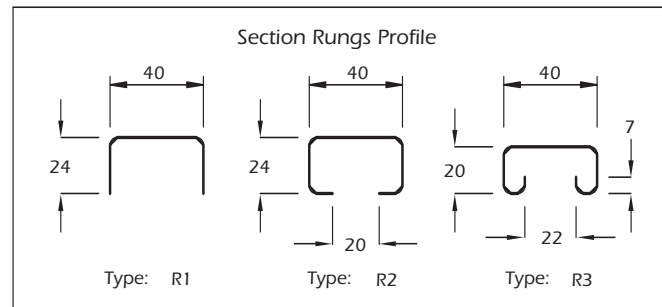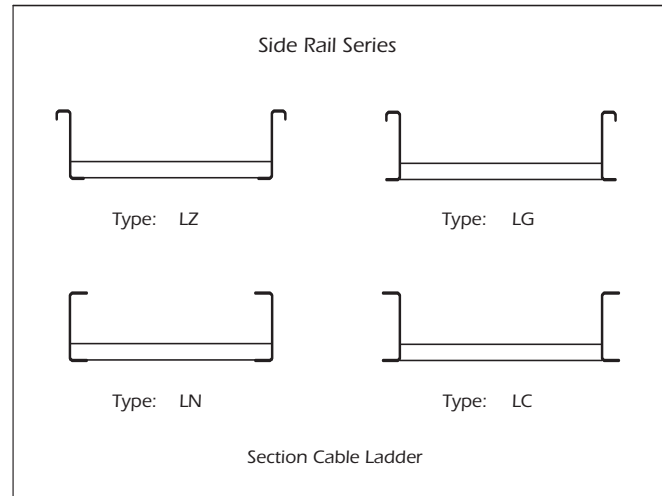


Steel Cable Ladder


Loading Graphs

The graphs indicate deflection and safe working loads for continuous horizontal runs, the cable ladder upper limits on each graph shows the maximum working load for the ladder on the given span. For information on loads and deflection in these circumstances further advice should be sought from United U-LI™.

These test were carried out using cable ladder Type:LZ manufactured from mild steel. The use of other steels will cause variation to this data and further advise on this should be requested from United U-LI™. The test were conducted to NEMA VE1 specification and verified by SIRIM Qas International Sdn Bhd.

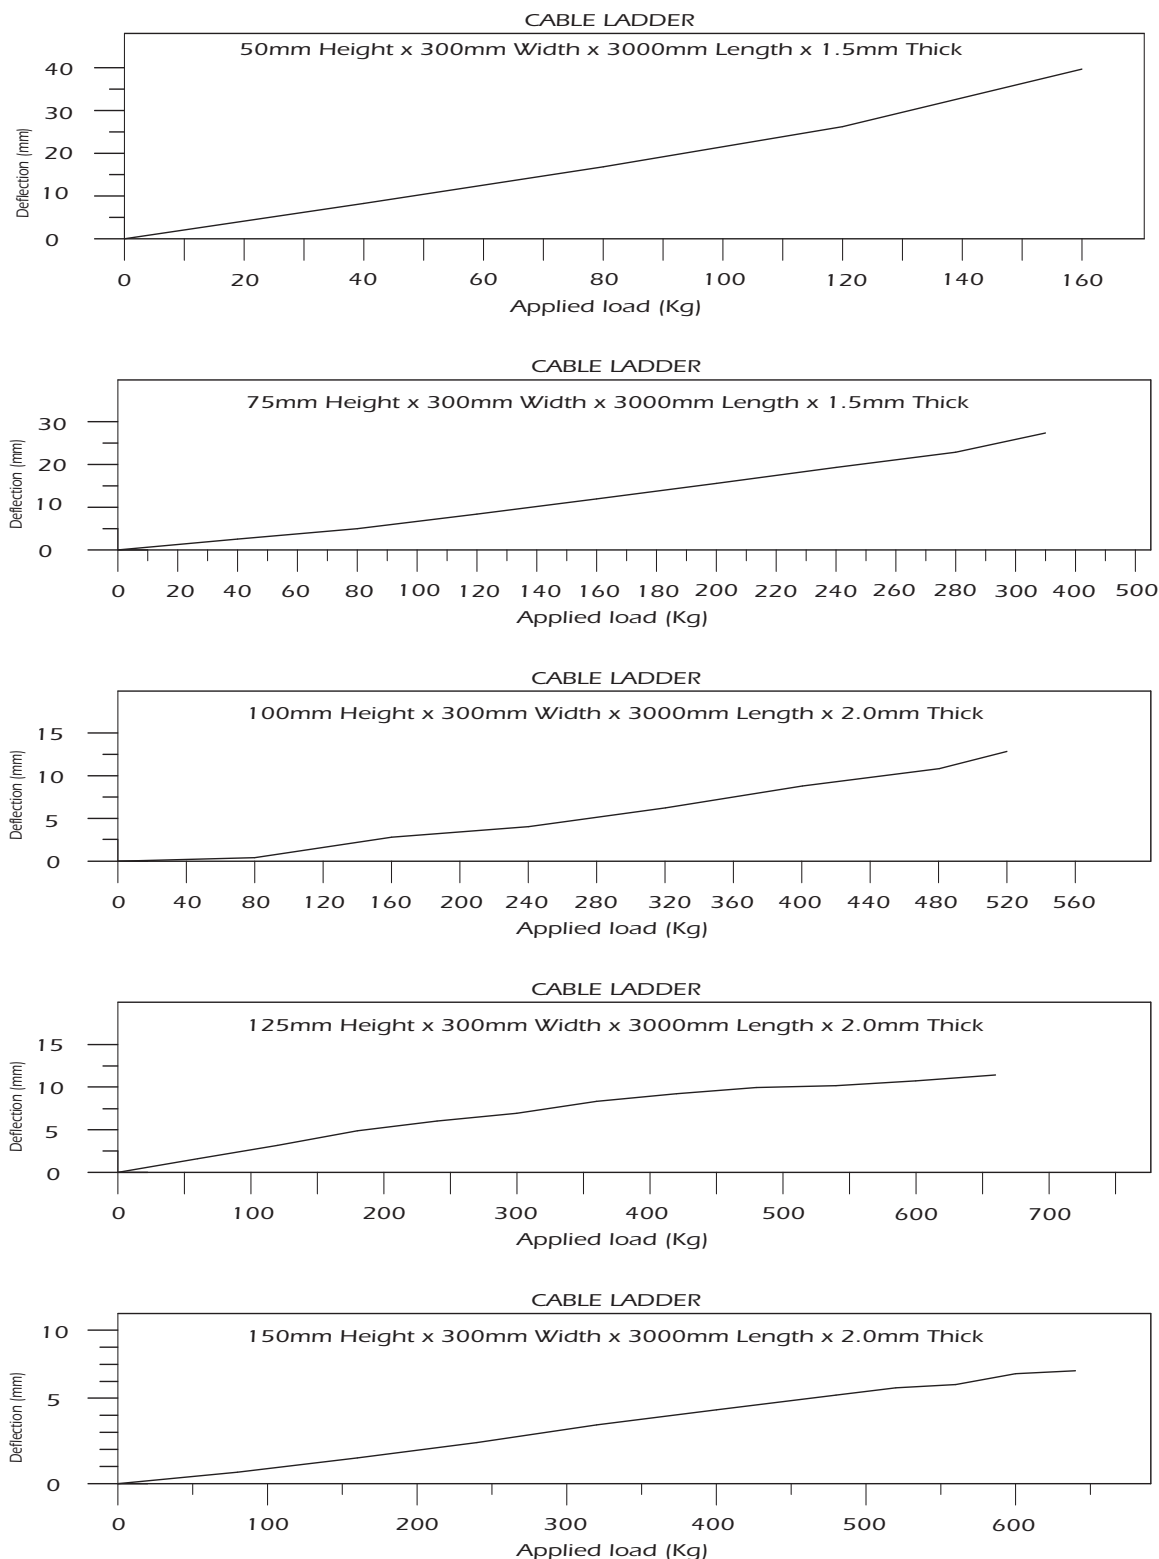


Steel Cable Ladder

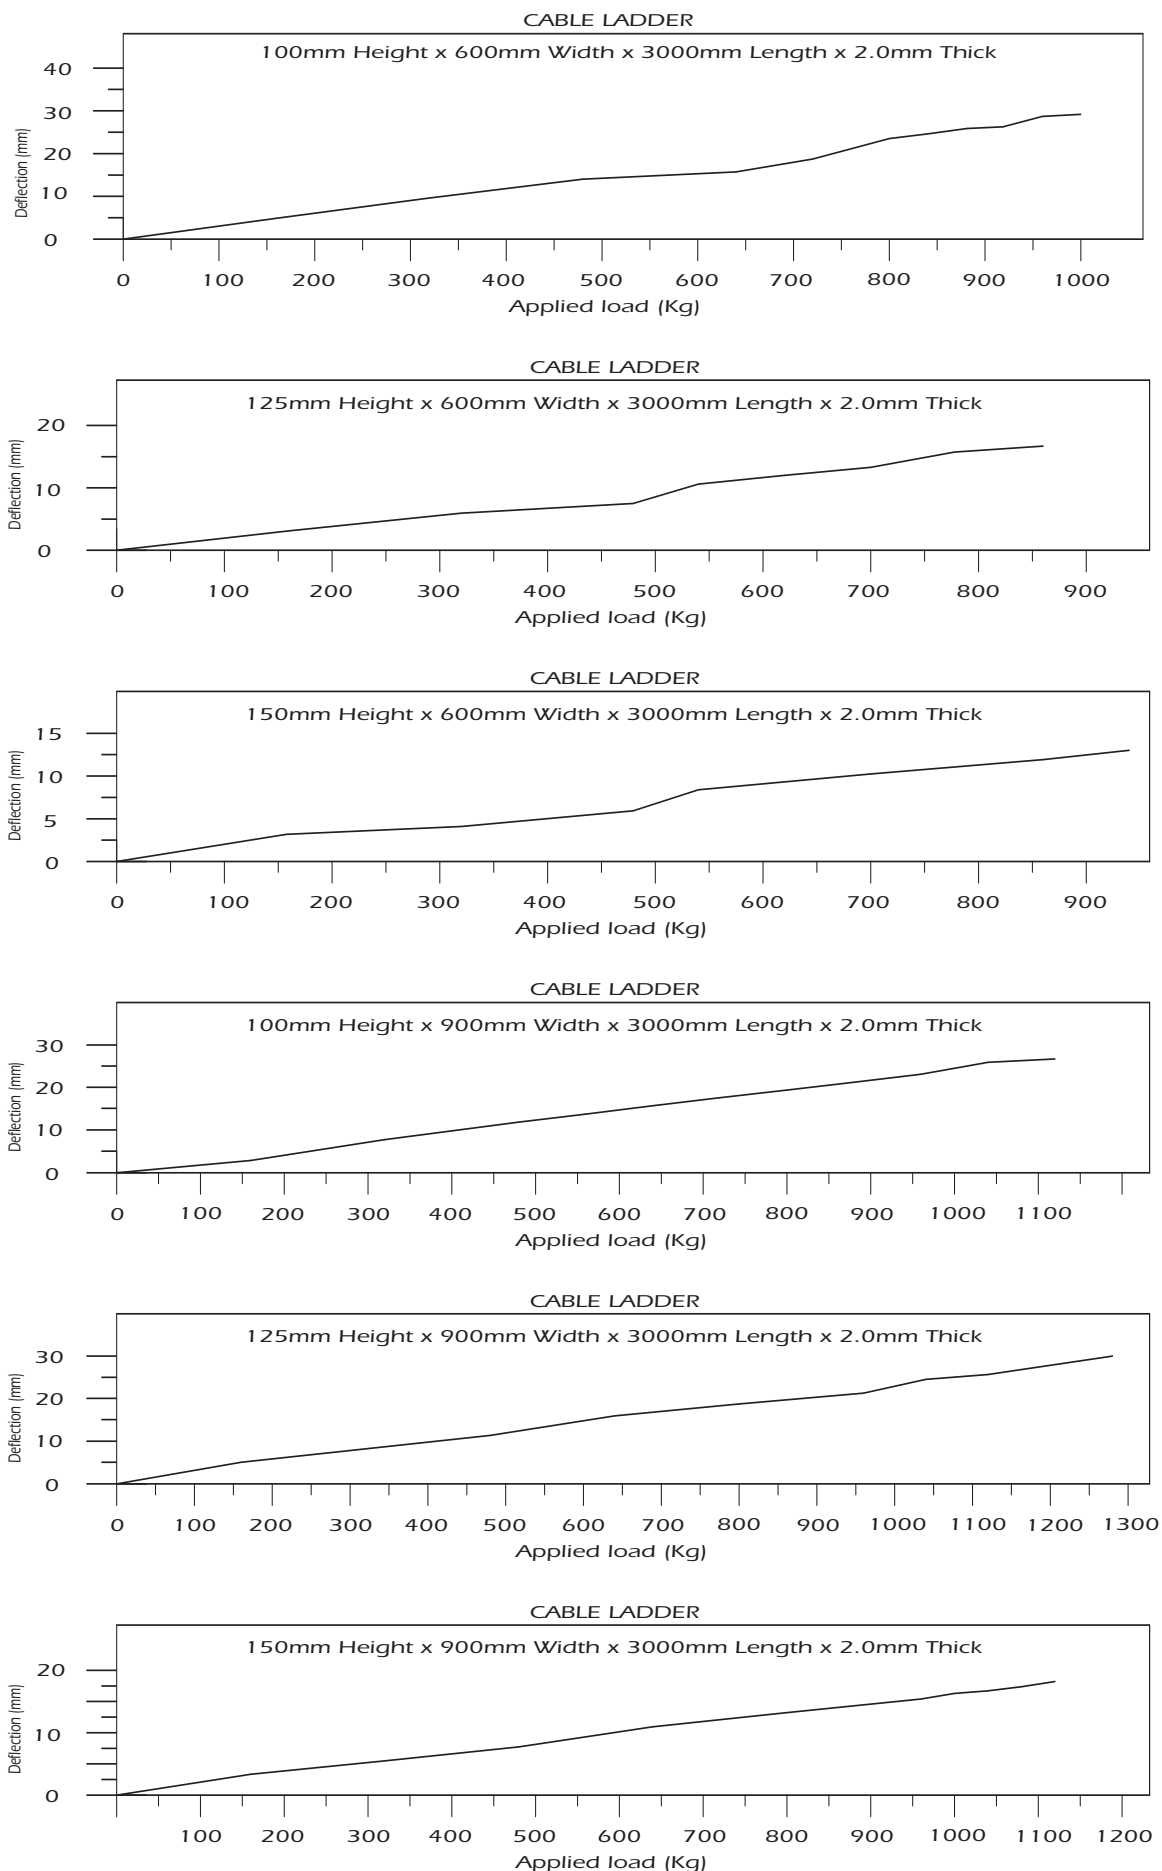

Steel Cable Ladder

Steel Cable Ladder - Straight Type: UL/LZ/ST

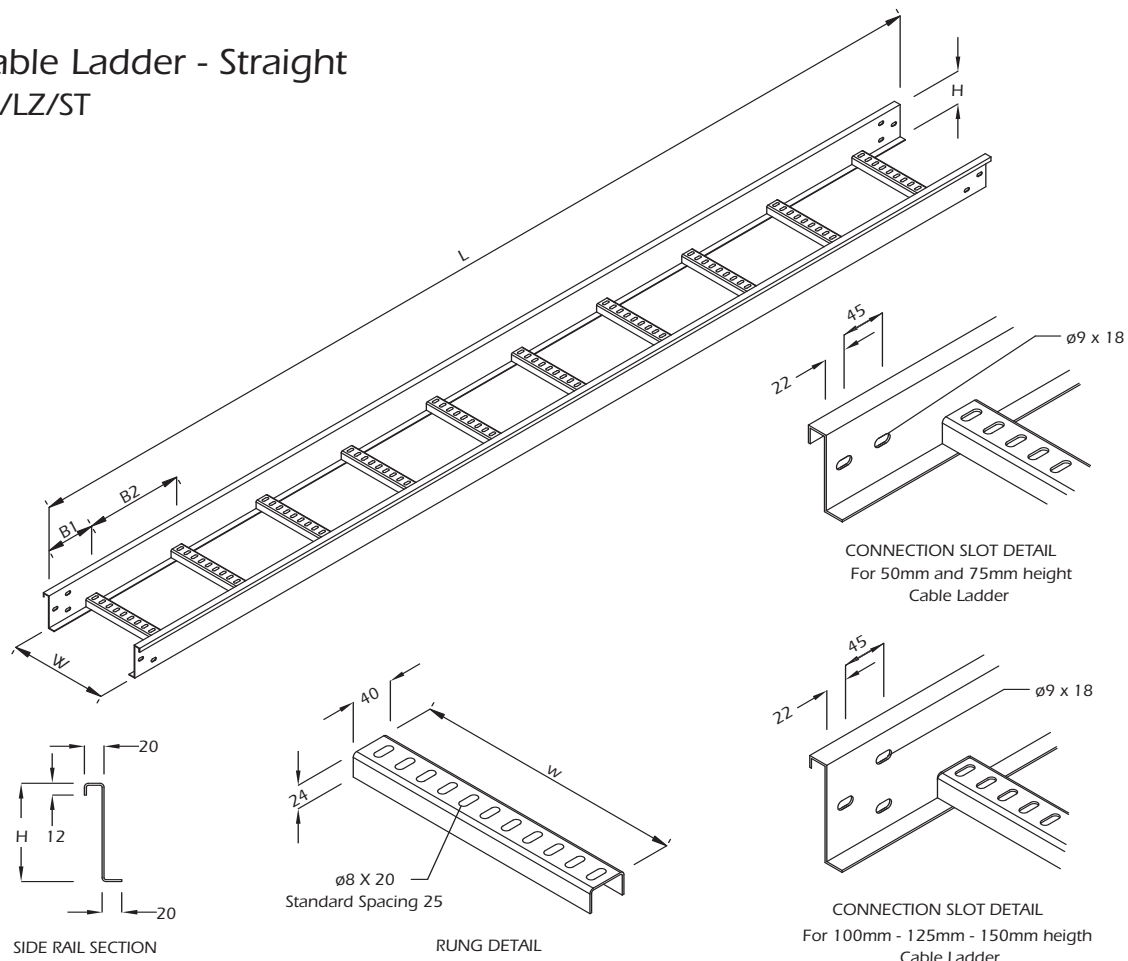

Components Ref.	H	W	B1	B2	L	Thickness	Finish
UL/LZ/ST/2-6	50	150	150	300	3000	1.5	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LZ/ST/2-8	50	200	150	300	3000	1.5	
UL/LZ/ST/2-10	50	250	150	300	3000	1.5	
UL/LZ/ST/2-12	50	300	150	300	3000	1.5	
UL/LZ/ST/3-6	75	150	150	300	3000	1.5	
UL/LZ/ST/3-8	75	200	150	300	3000	1.5	
UL/LZ/ST/3-10	75	250	150	300	3000	1.5	
UL/LZ/ST/3-12	75	300	150	300	3000	1.5	
UL/LZ/ST/4-6	100	150	150	300	3000	2.0	
UL/LZ/ST/4-8	100	200	150	300	3000	2.0	
UL/LZ/ST/4-10	100	250	150	300	3000	2.0	
UL/LZ/ST/4-12	100	300	150	300	3000	2.0	
UL/LZ/ST/4-16	100	400	150	300	3000	2.0	
UL/LZ/ST/4-18	100	450	150	300	3000	2.0	
UL/LZ/ST/4-20	100	500	150	300	3000	2.0	
UL/LZ/ST/4-24	100	600	150	300	3000	2.0	
UL/LZ/ST/4-30	100	750	150	300	3000	2.0	
UL/LZ/ST/4-36	100	900	150	300	3000	2.0	
UL/LZ/ST/4-40	100	1000	150	300	3000	2.0	
UL/LZ/ST/5-8	125	200	150	300	3000	2.0	

Components Ref.	H	W	B1	B2	L	Thickness	Finish
UL/LZ/ST/5-10	125	250	150	300	3000	2.0	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LZ/ST/5-12	125	300	150	300	3000	2.0	
UL/LZ/ST/5-16	125	400	150	300	3000	2.0	
UL/LZ/ST/5-18	125	450	150	300	3000	2.0	
UL/LZ/ST/5-20	125	500	150	300	3000	2.0	
UL/LZ/ST/5-24	125	600	150	300	3000	2.0	
UL/LZ/ST/5-30	125	750	150	300	3000	2.0	
UL/LZ/ST/5-36	125	900	150	300	3000	2.0	
UL/LZ/ST/5-40	125	1000	150	300	3000	2.0	
UL/LZ/ST/6-8	150	200	150	300	3000	2.0	
UL/LZ/ST/6-10	150	250	150	300	3000	2.0	
UL/LZ/ST/6-12	150	300	150	300	3000	2.0	
UL/LZ/ST/6-16	150	400	150	300	3000	2.0	
UL/LZ/ST/6-18	150	450	150	300	3000	2.0	
UL/LZ/ST/6-20	150	500	150	300	3000	2.0	
UL/LZ/ST/6-24	150	600	150	300	3000	2.0	
UL/LZ/ST/6-30	150	750	150	300	3000	2.0	
UL/LZ/ST/6-32	150	800	150	300	3000	2.0	
UL/LZ/ST/6-36	150	900	150	300	3000	2.0	
UL/LZ/ST/6-40	150	1000	150	300	3000	2.0	

Dimension in Millimetre

Abbreviation: B - Rung Spacing H - Height L - Length W - Width


When ordering please indicate Material and Finish.

We also supply other sizes with the same Side Rail, Rung Profile and various number of Connection Slots.

Steel Cable Ladder

Steel Cable Ladder - 90° Elbow

Type: UL/LZ/EL90

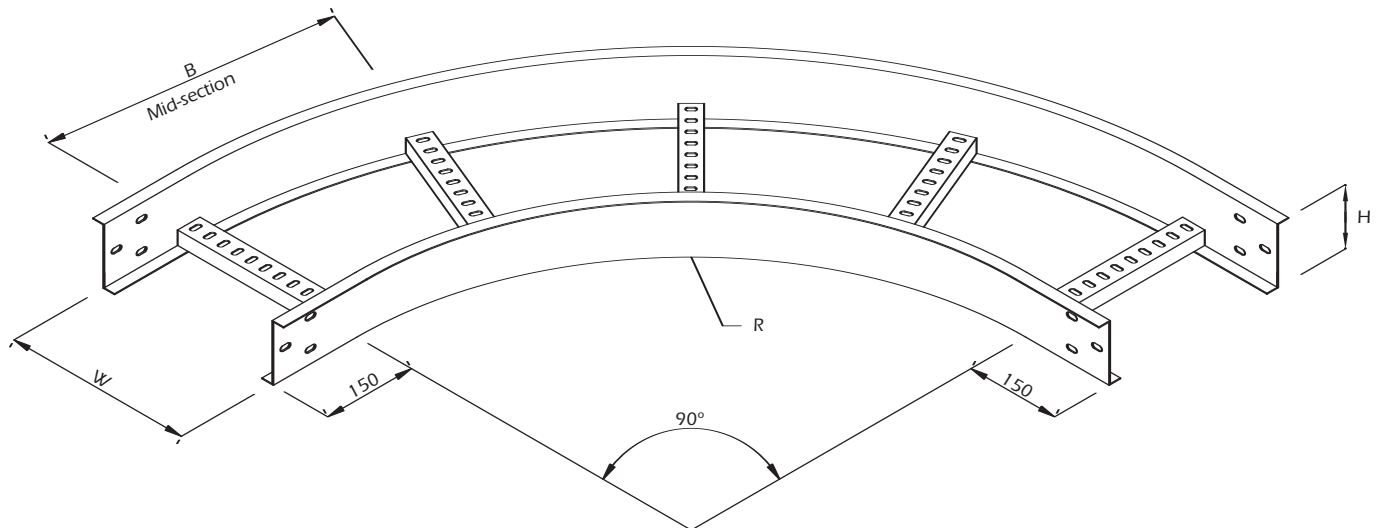

Rung Spacing 300mm

Components Ref.	H	W	Thickness	R (Radii)	Finish
UL/LZ/EL90/2-6	50	150	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LZ/EL90/2-8	50	200			
UL/LZ/EL90/2-10	50	250			
UL/LZ/EL90/2-12	50	300			
UL/LZ/EL90/3-6	75	150			
UL/LZ/EL90/3-8	75	200			
UL/LZ/EL90/3-10	75	250			
UL/LZ/EL90/3-12	75	300			
UL/LZ/EL90/4-6	100	150			
UL/LZ/EL90/4-8	100	200			
UL/LZ/EL90/4-10	100	250			
UL/LZ/EL90/4-12	100	300			
UL/LZ/EL90/4-16	100	400			
UL/LZ/EL90/4-18	100	450			
UL/LZ/EL90/4-20	100	500			
UL/LZ/EL90/4-24	100	600			
UL/LZ/EL90/4-30	100	750			
UL/LZ/EL90/4-36	100	900			
UL/LZ/EL90/4-40	100	1000			
UL/LZ/EL90/5-8	125	200			

Components Ref.	H	W	Thickness	R (Radii)	Finish
UL/LZ/EL90/5-10	125	250	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LZ/EL90/5-12	125	300			
UL/LZ/EL90/5-16	125	400			
UL/LZ/EL90/5-18	125	450			
UL/LZ/EL90/5-20	125	500			
UL/LZ/EL90/5-24	125	600			
UL/LZ/EL90/5-30	125	750			
UL/LZ/EL90/5-36	125	900			
UL/LZ/EL90/5-40	125	1000			
UL/LZ/EL90/6-8	150	200			
UL/LZ/EL90/6-10	150	250			
UL/LZ/EL90/6-12	150	300			
UL/LZ/EL90/6-16	150	400			
UL/LZ/EL90/6-18	150	450			
UL/LZ/EL90/6-20	150	500			
UL/LZ/EL90/6-24	150	600			
UL/LZ/EL90/6-30	150	750			
UL/LZ/EL90/6-32	150	800			
UL/LZ/EL90/6-36	150	900			
UL/LZ/EL90/6-40	150	1000			


Dimension in Millimetre

Abbreviation: B - Rung Spacing H - Height R - Radii W - Width

When ordering Material and Finish as straight cable ladder please also indicate Radius.

Steel Cable Ladder

Steel Cable Ladder - 45° Elbow Type: UL/LZ/EL45

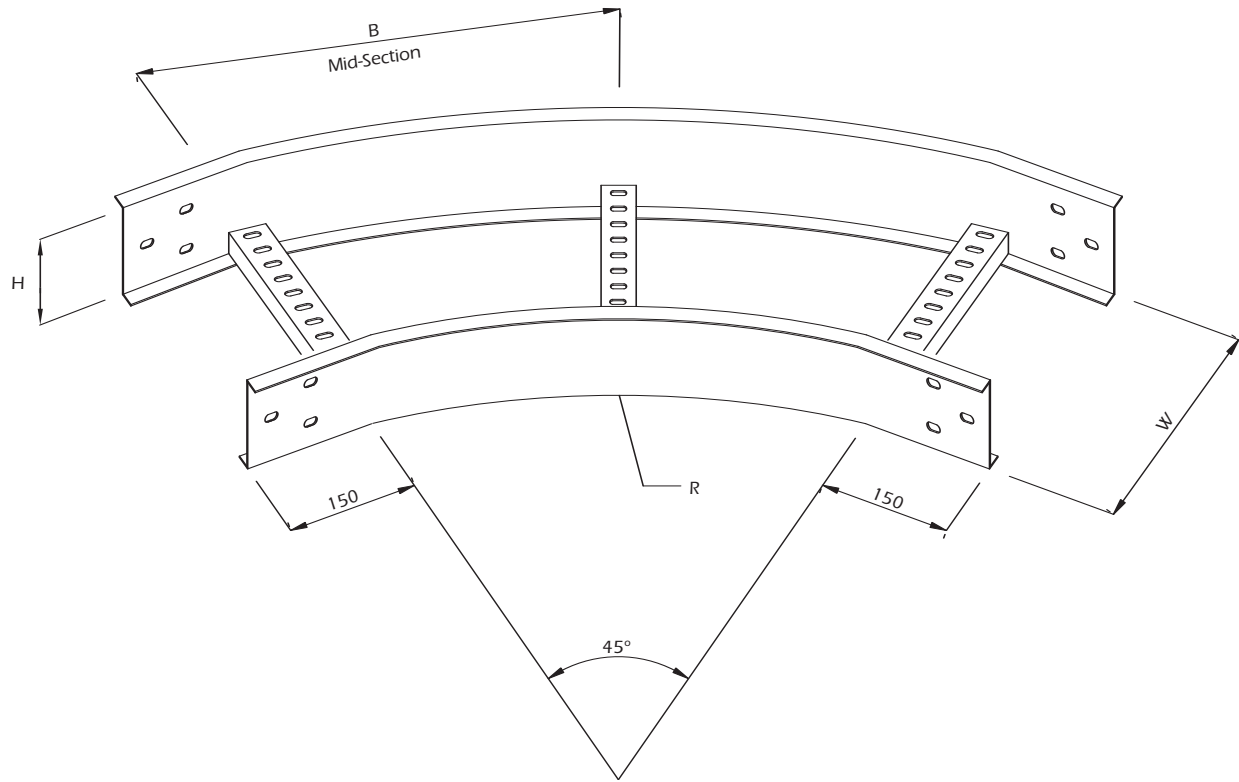

Rung Spacing 300mm

Components Ref.	H	W	Thickness	R (Radii)	Finish
UL/LZ/EL45/2-6	50	150	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LZ/EL45/2-8	50	200			
UL/LZ/EL45/2-10	50	250			
UL/LZ/EL45/2-12	50	300			
UL/LZ/EL45/3-6	75	150			
UL/LZ/EL45/3-8	75	200			
UL/LZ/EL45/3-10	75	250			
UL/LZ/EL45/3-12	75	300			
UL/LZ/EL45/4-6	100	150			
UL/LZ/EL45/4-8	100	200			
UL/LZ/EL45/4-10	100	250			
UL/LZ/EL45/4-12	100	300			
UL/LZ/EL45/4-16	100	400			
UL/LZ/EL45/4-18	100	450			
UL/LZ/EL45/4-20	100	500			
UL/LZ/EL45/4-24	100	600			
UL/LZ/EL45/4-30	100	750			
UL/LZ/EL45/4-36	100	900			
UL/LZ/EL45/4-40	100	1000			
UL/LZ/EL45/5-8	125	200			

Components Ref.	H	W	Thickness	R (Radii)	Finish
UL/LZ/EL45/5-10	125	250	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LZ/EL45/5-12	125	300			
UL/LZ/EL45/5-16	125	400			
UL/LZ/EL45/5-18	125	450			
UL/LZ/EL45/5-20	125	500			
UL/LZ/EL45/5-24	125	600			
UL/LZ/EL45/5-30	125	750			
UL/LZ/EL45/5-36	125	900			
UL/LZ/EL45/5-40	125	1000			
UL/LZ/EL45/6-8	150	200			
UL/LZ/EL45/6-10	150	250			
UL/LZ/EL45/6-12	150	300			
UL/LZ/EL45/6-16	150	400			
UL/LZ/EL45/6-18	150	450			
UL/LZ/EL45/6-20	150	500			
UL/LZ/EL45/6-24	150	600			
UL/LZ/EL45/6-30	150	750			
UL/LZ/EL45/6-32	150	800			
UL/LZ/EL45/6-36	150	900			
UL/LZ/EL45/6-40	150	1000			

Dimension in Millimetre


Abbreviation: B - Rung Spacing H - Height R - Radii W - Width

When ordering Material and Finish as straight cable ladder please also indicate Radius.

Steel Cable Ladder

Steel Cable Ladder - Horizontal Equal Tee

Type: UL/LZ/ET

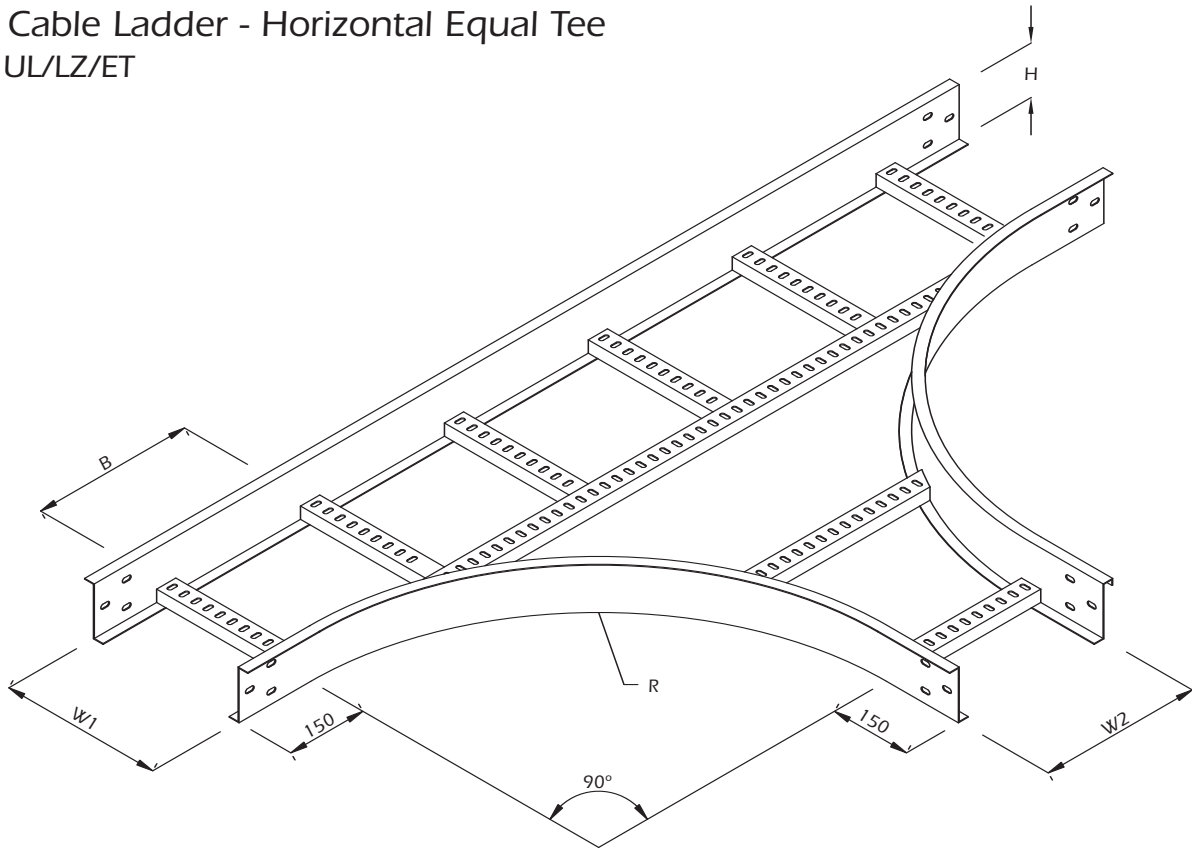

Rung Spacing 300mm

Components Ref.	H	W1	W2	Thickness	R (Radii)	Finish
UL/LZ/ET/2-6	50	150	150	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LZ/ET/2-8	50	200	200			
UL/LZ/ET/2-10	50	250	250			
UL/LZ/ET/2-12	50	300	300			
UL/LZ/ET/3-6	75	150	150			
UL/LZ/ET/3-8	75	200	200			
UL/LZ/ET/3-10	75	250	250			
UL/LZ/ET/3-12	75	300	300			
UL/LZ/ET/4-6	100	150	150			
UL/LZ/ET/4-8	100	200	200			
UL/LZ/ET/4-10	100	250	250			
UL/LZ/ET/4-12	100	300	300			
UL/LZ/ET/4-16	100	400	400			
UL/LZ/ET/4-18	100	450	450			
UL/LZ/ET/4-20	100	500	500			
UL/LZ/ET/4-24	100	600	600			
UL/LZ/ET/4-30	100	750	750			
UL/LZ/ET/4-36	100	900	900			
UL/LZ/ET/4-40	100	1000	1000			
UL/LZ/ET/5-8	125	200	200			

Components Ref.	H	W1	W2	Thickness	R (Radii)	Finish
UL/LZ/ET/5-10	125	250	250	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LZ/ET/5-12	125	300	300			
UL/LZ/ET/5-16	125	400	400			
UL/LZ/ET/5-18	125	450	450			
UL/LZ/ET/5-20	125	500	500			
UL/LZ/ET/5-24	125	600	600			
UL/LZ/ET/5-30	125	750	750			
UL/LZ/ET/5-36	125	900	900			
UL/LZ/ET/5-40	125	1000	1000			
UL/LZ/ET/6-8	150	200	200			
UL/LZ/ET/6-10	150	250	250			
UL/LZ/ET/6-12	150	300	300			
UL/LZ/ET/6-16	150	400	400			
UL/LZ/ET/6-18	150	450	450			
UL/LZ/ET/6-20	150	500	500			
UL/LZ/ET/6-24	150	600	600			
UL/LZ/ET/6-30	150	750	750			
UL/LZ/ET/6-32	150	800	800			
UL/LZ/ET/6-36	150	900	900			
UL/LZ/ET/6-40	150	1000	1000			

Dimension in Millimetre


Abbreviation: B - Rung Spacing H - Height R - Radii W - Width

When ordering Material and Finish as straight cable ladder please also indicate Radius.

Steel Cable Ladder

Steel Cable Ladder - Unequal Tee

Type: UL/LZ/UT

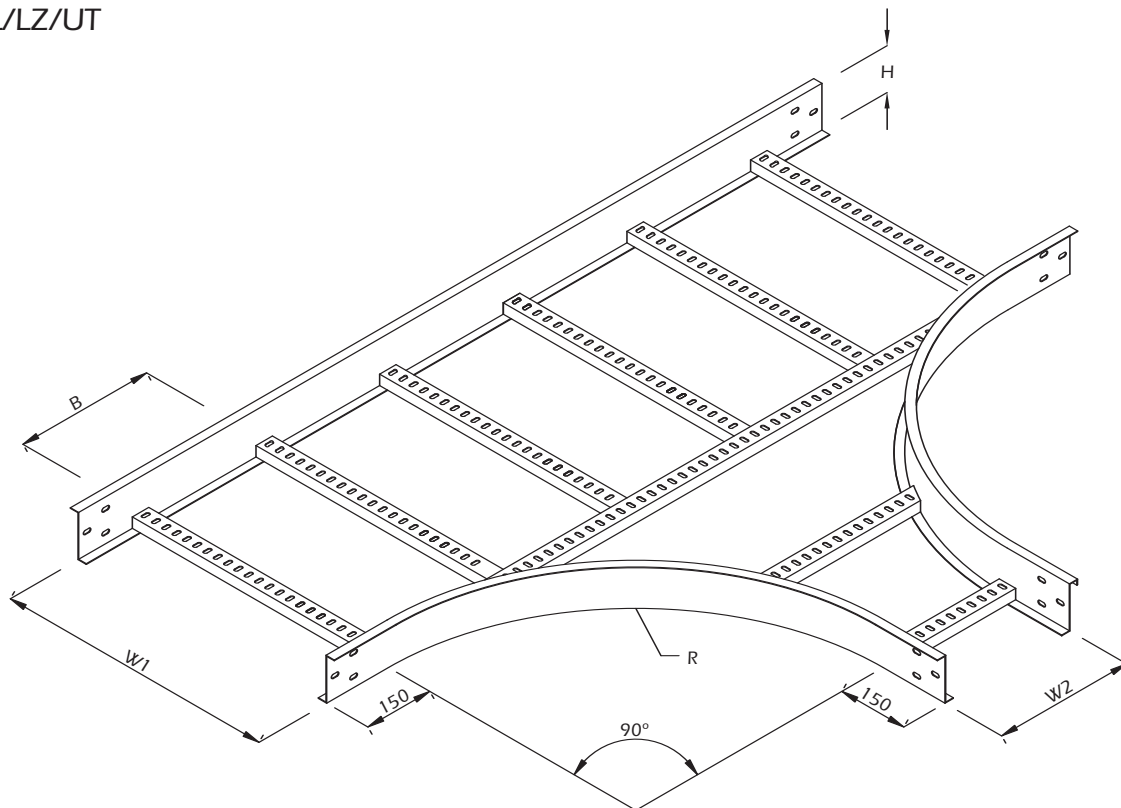

Rung Spacing 300mm

Components Ref.	H	W1	W2	Thickness	R (Radii)	Finish
UL/LZ/UT/2-6	50	150	200 to 1000	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LZ/UT/2-8	50	200				
UL/LZ/UT/2-10	50	250				
UL/LZ/UT/2-12	50	300				
UL/LZ/UT/3-6	75	150				
UL/LZ/UT/3-8	75	200				
UL/LZ/UT/3-10	75	250				
UL/LZ/UT/3-12	75	300				
UL/LZ/UT/4-6	100	150				
UL/LZ/UT/4-8	100	200				
UL/LZ/UT/4-10	100	250				
UL/LZ/UT/4-12	100	300				
UL/LZ/UT/4-16	100	400				
UL/LZ/UT/4-18	100	450				
UL/LZ/UT/4-20	100	500				
UL/LZ/UT/4-24	100	600				
UL/LZ/UT/4-30	100	750				
UL/LZ/UT/4-36	100	900				
UL/LZ/UT/4-40	100	1000				
UL/LZ/UT/5-8	125	200				

Components Ref.	H	W1	W2	Thickness	R (Radii)	Finish
UL/LZ/UT/5-10	125	250	200 to 1000	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LZ/UT/5-12	125	300				
UL/LZ/UT/5-16	125	400				
UL/LZ/UT/5-18	125	450				
UL/LZ/UT/5-20	125	500				
UL/LZ/UT/5-24	125	600				
UL/LZ/UT/5-30	125	750				
UL/LZ/UT/5-36	125	900				
UL/LZ/UT/5-40	125	1000				
UL/LZ/UT/6-8	150	200				
UL/LZ/UT/6-10	150	250				
UL/LZ/UT/6-12	150	300				
UL/LZ/UT/6-16	150	400				
UL/LZ/UT/6-18	150	450				
UL/LZ/UT/6-20	150	500				
UL/LZ/UT/6-24	150	600				
UL/LZ/UT/6-30	150	750				
UL/LZ/UT/6-32	150	800				
UL/LZ/UT/6-36	150	900				
UL/LZ/UT/6-40	150	1000				

Dimension in Millimetre


Abbreviation: B - Rung Spacing H - Height R - Radii W - Width

When ordering Material and Finish as straight cable ladder please also indicate Radius and Width (W2).

Steel Cable Ladder

Steel Cable Ladder - Unequal Crosses

Type: UL/LZ/UC

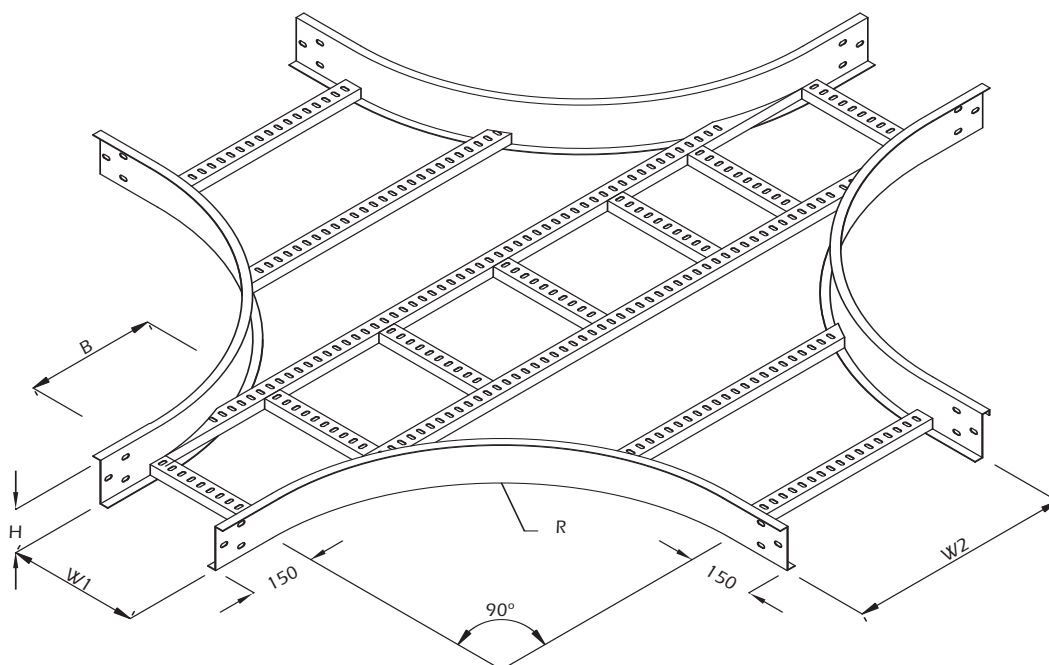

Rung Spacing 300mm

Components Ref.	H	W1	W2	Thickness	R (Radii)	Finish
UL/LZ/UC/2-6	50	150	200 to 1000	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LZ/UC/2-8	50	200				
UL/LZ/UC/2-10	50	250				
UL/LZ/UC/2-12	50	300				
UL/LZ/UC/3-6	75	150				
UL/LZ/UC/3-8	75	200				
UL/LZ/UC/3-10	75	250				
UL/LZ/UC/3-12	75	300				
UL/LZ/UC/4-6	100	150				
UL/LZ/UC/4-8	100	200				
UL/LZ/UC/4-10	100	250				
UL/LZ/UC/4-12	100	300				
UL/LZ/UC/4-16	100	400				
UL/LZ/UC/4-18	100	450				
UL/LZ/UC/4-20	100	500				
UL/LZ/UC/4-24	100	600				
UL/LZ/UC/4-30	100	750				
UL/LZ/UC/4-36	100	900				
UL/LZ/UC/4-40	100	1000				
UL/LZ/UC/5-8	125	200				

Components Ref.	H	W1	W2	Thickness	R (Radii)	Finish
UL/LZ/UC/5-10	125	250	200 to 1000	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LZ/UC/5-12	125	300				
UL/LZ/UC/5-16	125	400				
UL/LZ/UC/5-18	125	450				
UL/LZ/UC/5-20	125	500				
UL/LZ/UC/5-24	125	600				
UL/LZ/UC/5-30	125	750				
UL/LZ/UC/5-36	125	900				
UL/LZ/UC/5-40	125	1000				
UL/LZ/UC/6-8	150	200				
UL/LZ/UC/6-10	150	250				
UL/LZ/UC/6-12	150	300				
UL/LZ/UC/6-16	150	400				
UL/LZ/UC/6-18	150	450				
UL/LZ/UC/6-20	150	500				
UL/LZ/UC/6-24	150	600				
UL/LZ/UC/6-30	150	750				
UL/LZ/UC/6-32	150	800				
UL/LZ/UC/6-36	150	900				
UL/LZ/UC/6-40	150	1000				

Dimension in Millimetre


Abbreviation: B - Rung Spacing H - Height R - Radii W - Width

When ordering Material and Finish as straight cable ladder please also indicate Radius and Width (W2)

Steel Cable Ladder

Steel Cable Ladder - Equal Crosses

Type: UL/LZ/EC

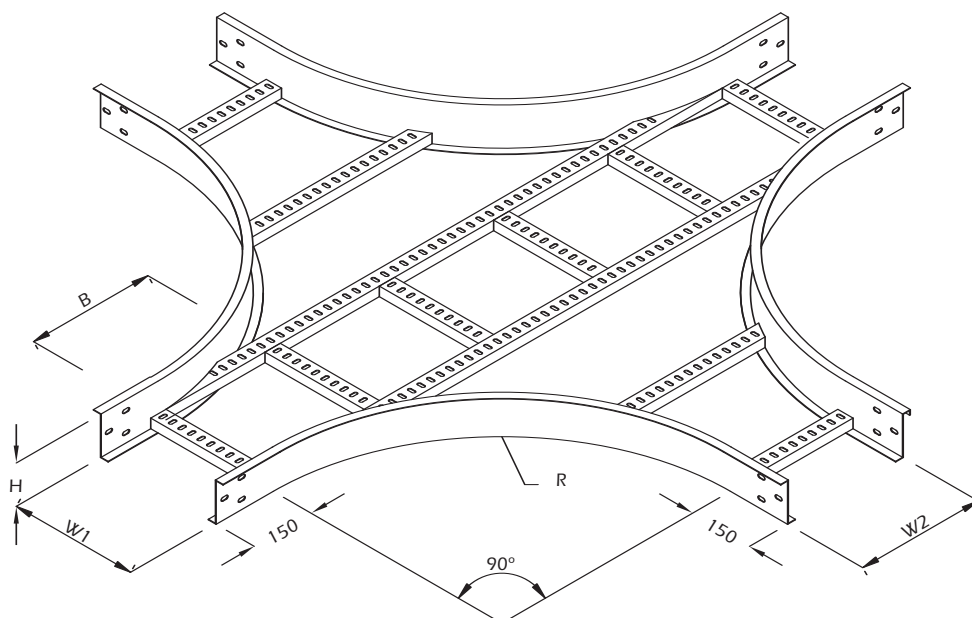

Rung Spacing 300mm

Components Ref.	H	W1	W2	Thickness	R (Radii)	Finish
UL/LZ/EC/2-6	50	150	150	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LZ/EC/2-8	50	200	200			
UL/LZ/EC/2-10	50	250	250			
UL/LZ/EC/2-12	50	300	300			
UL/LZ/EC/3-6	75	150	150			
UL/LZ/EC/3-8	75	200	200			
UL/LZ/EC/3-10	75	250	250			
UL/LZ/EC/3-12	75	300	300			
UL/LZ/EC/4-6	100	150	150			
UL/LZ/EC/4-8	100	200	200			
UL/LZ/EC/4-10	100	250	250			
UL/LZ/EC/4-12	100	300	300			
UL/LZ/EC/4-16	100	400	400			
UL/LZ/EC/4-18	100	450	450			
UL/LZ/EC/4-20	100	500	500			
UL/LZ/EC/4-24	100	600	600			
UL/LZ/EC/4-30	100	750	750			
UL/LZ/EC/4-36	100	900	900			
UL/LZ/EC/4-40	100	1000	1000			
UL/LZ/EC/5-8	125	200	200			

Components Ref.	H	W1	W2	Thickness	R (Radii)	Finish
UL/LZ/EC/5-10	125	250	250	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LZ/EC/5-12	125	300	300			
UL/LZ/EC/5-16	125	400	400			
UL/LZ/EC/5-18	125	450	450			
UL/LZ/EC/5-20	125	500	500			
UL/LZ/EC/5-24	125	600	600			
UL/LZ/EC/5-30	125	750	750			
UL/LZ/EC/5-36	125	900	900			
UL/LZ/EC/5-40	125	1000	1000			
UL/LZ/EC/6-8	150	200	200			
UL/LZ/EC/6-10	150	250	250			
UL/LZ/EC/6-12	150	300	300			
UL/LZ/EC/6-16	150	400	400			
UL/LZ/EC/6-18	150	450	450			
UL/LZ/EC/6-20	150	500	500			
UL/LZ/EC/6-24	150	600	600			
UL/LZ/EC/6-30	150	750	750			
UL/LZ/EC/6-32	150	800	800			
UL/LZ/EC/6-36	150	900	900			
UL/LZ/EC/6-40	150	1000	1000			

Dimension in Millimetre


Abbreviation: B - Rung Spacing H - Height R - Radii W - Width

When ordering Material and Finish as straight cable ladder please also indicate Radius.

Steel Cable Ladder

Steel Cable Ladder - External Riser

Type: UL/LZ/ER

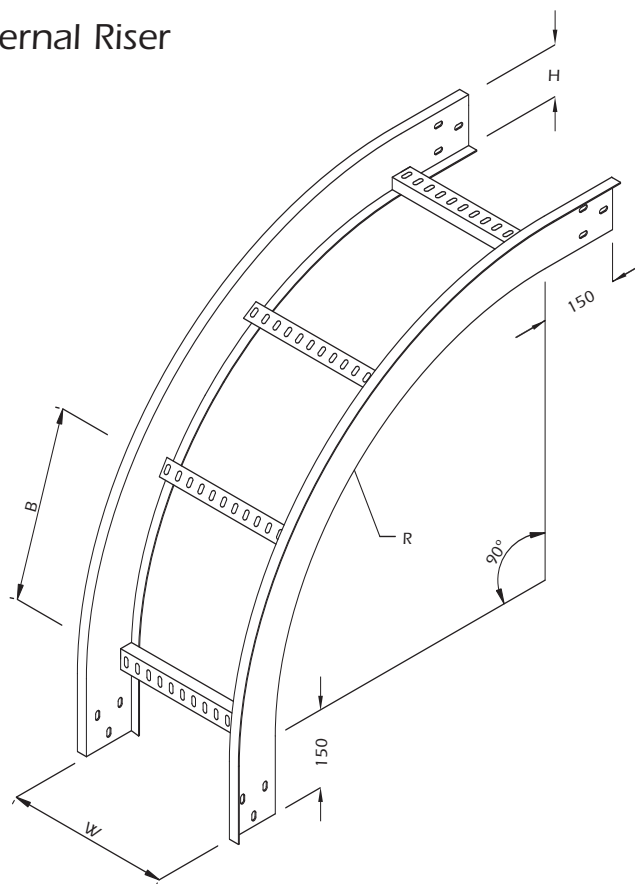

Rung Spacing 300mm

Components Ref.	H	W	Thickness	R (Radii)	Finish
UL/LZ/ER/2-6	50	150	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LZ/ER/2-8	50	200			
UL/LZ/ER/2-10	50	250			
UL/LZ/ER/2-12	50	300			
UL/LZ/ER/3-6	75	150			
UL/LZ/ER/3-8	75	200			
UL/LZ/ER/3-10	75	250			
UL/LZ/ER/3-12	75	300			
UL/LZ/ER/4-6	100	150			
UL/LZ/ER/4-8	100	200			
UL/LZ/ER/4-10	100	250			
UL/LZ/ER/4-12	100	300			
UL/LZ/ER/4-16	100	400			
UL/LZ/ER/4-18	100	450			
UL/LZ/ER/4-20	100	500			
UL/LZ/ER/4-24	100	600			
UL/LZ/ER/4-30	100	750			
UL/LZ/ER/4-36	100	900			
UL/LZ/ER/4-40	100	1000			
UL/LZ/ER/5-8	125	200			

Components Ref.	H	W	Thickness	R (Radii)	Finish
UL/LZ/ER/5-10	125	250	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LZ/ER/5-12	125	300			
UL/LZ/ER/5-16	125	400			
UL/LZ/ER/5-18	125	450			
UL/LZ/ER/5-20	125	500			
UL/LZ/ER/5-24	125	600			
UL/LZ/ER/5-30	125	750			
UL/LZ/ER/5-36	125	900			
UL/LZ/ER/5-40	125	1000			
UL/LZ/ER/6-8	150	200			
UL/LZ/ER/6-10	150	250			
UL/LZ/ER/6-12	150	300			
UL/LZ/ER/6-16	150	400			
UL/LZ/ER/6-18	150	450			
UL/LZ/ER/6-20	150	500			
UL/LZ/ER/6-24	150	600			
UL/LZ/ER/6-30	150	750			
UL/LZ/ER/6-32	150	800			
UL/LZ/ER/6-36	150	900			
UL/LZ/ER/6-40	150	1000			

Dimension in Millimetre


Abbreviation: B - Rung Spacing H - Height R - Radii W - Width

When ordering Material and Finish as straight cable ladder please also indicate Radius.

Steel Cable Ladder

Steel Cable Ladder - Internal Riser

Type: UL/LZ/IR

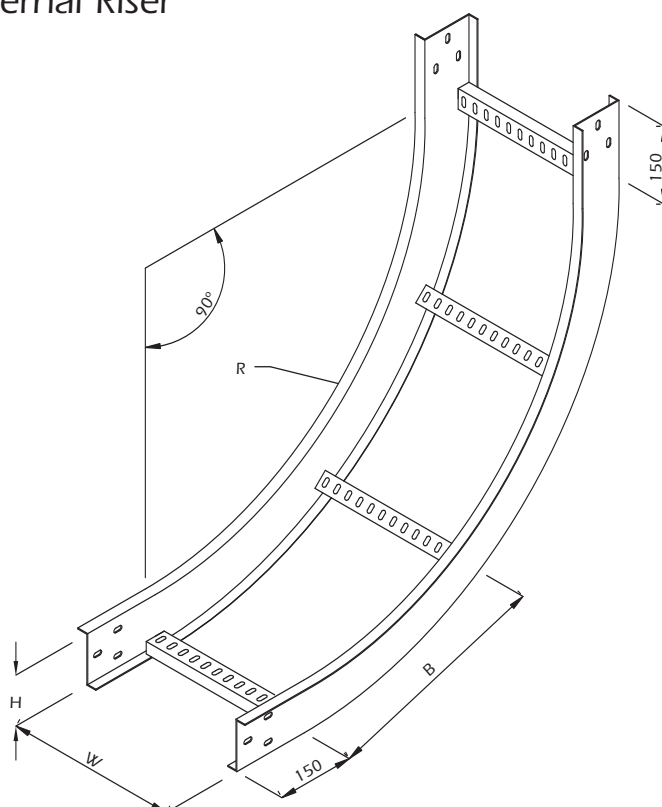

Rung Spacing 300mm

Components Ref.	H	W	Thickness	R (Radii)	Finish
UL/LZ/IR/2-6	50	150	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LZ/IR/2-8	50	200			
UL/LZ/IR/2-10	50	250			
UL/LZ/IR/2-12	50	300			
UL/LZ/IR/3-6	75	150			
UL/LZ/IR/3-8	75	200			
UL/LZ/IR/3-10	75	250			
UL/LZ/IR/3-12	75	300			
UL/LZ/IR/4-6	100	150			
UL/LZ/IR/4-8	100	200			
UL/LZ/IR/4-10	100	250			
UL/LZ/IR/4-12	100	300			
UL/LZ/IR/4-16	100	400			
UL/LZ/IR/4-18	100	450			
UL/LZ/IR/4-20	100	500			
UL/LZ/IR/4-24	100	600			
UL/LZ/IR/4-30	100	750			
UL/LZ/IR/4-36	100	900			
UL/LZ/IR/4-40	100	1000			
UL/LZ/IR/5-8	125	200			

Components Ref.	H	W	Thickness	R (Radii)	Finish
UL/LZ/IR/5-10	125	250	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LZ/IR/5-12	125	300			
UL/LZ/IR/5-16	125	400			
UL/LZ/IR/5-18	125	450			
UL/LZ/IR/5-20	125	500			
UL/LZ/IR/5-24	125	600			
UL/LZ/IR/5-30	125	750			
UL/LZ/IR/5-36	125	900			
UL/LZ/IR/5-40	125	1000			
UL/LZ/IR/6-8	150	200			
UL/LZ/IR/6-10	150	250			
UL/LZ/IR/6-12	150	300			
UL/LZ/IR/6-16	150	400			
UL/LZ/IR/6-18	150	450			
UL/LZ/IR/6-20	150	500			
UL/LZ/IR/6-24	150	600			
UL/LZ/IR/6-30	150	750			
UL/LZ/IR/6-32	150	800			
UL/LZ/IR/6-36	150	900			
UL/LZ/IR/6-40	150	1000			

Dimension in Millimetre


Abbreviation: B - Rung Spacing H - Height R - Radii W - Width

When ordering Material and Finish as straight cable ladder please also indicate Radius.

Steel Cable Ladder

Steel Cable Ladder - 90° Vertical Tee

Type: UL/LZ/VT90

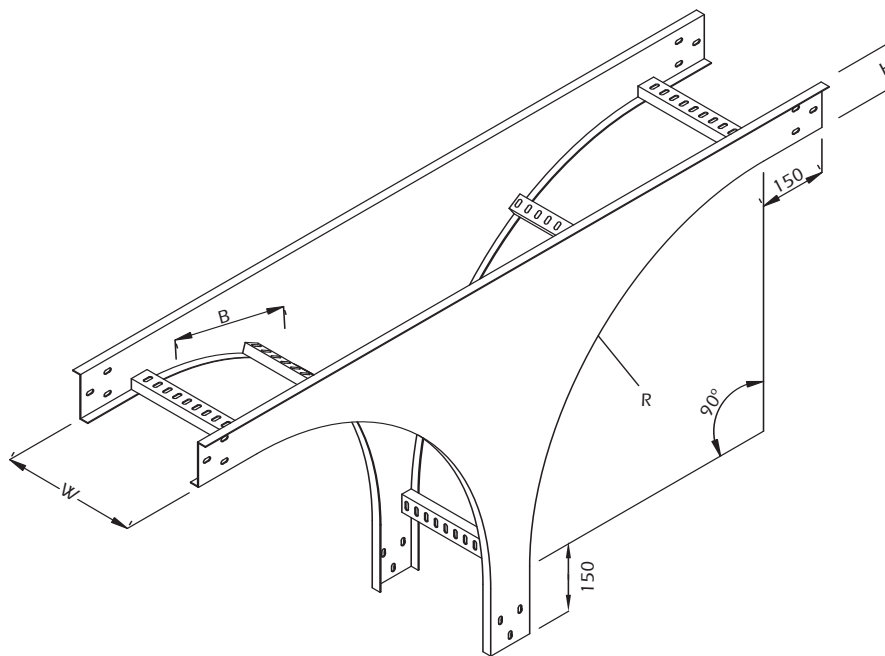

Rung Spacing 300mm

Components Ref.	H	W	Thickness	R (Radii)	Finish
UL/LZ/VT90/2-6	50	150	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LZ/VT90/2-8	50	200			
UL/LZ/VT90/2-10	50	250			
UL/LZ/VT90/2-12	50	300			
UL/LZ/VT90/3-6	75	150			
UL/LZ/VT90/3-8	75	200			
UL/LZ/VT90/3-10	75	250			
UL/LZ/VT90/3-12	75	300			
UL/LZ/VT90/4-6	100	150			
UL/LZ/VT90/4-8	100	200			
UL/LZ/VT90/4-10	100	250			
UL/LZ/VT90/4-12	100	300			
UL/LZ/VT90/4-16	100	400			
UL/LZ/VT90/4-18	100	450			
UL/LZ/VT90/4-20	100	500			
UL/LZ/VT90/4-24	100	600			
UL/LZ/VT90/4-30	100	750			
UL/LZ/VT90/4-36	100	900			
UL/LZ/VT90/4-40	100	1000			
UL/LZ/VT90/5-8	125	200			

Components Ref.	H	W	Thickness	R (Radii)	Finish
UL/LZ/VT90/5-10	125	250	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LZ/VT90/5-12	125	300			
UL/LZ/VT90/5-16	125	400			
UL/LZ/VT90/5-18	125	450			
UL/LZ/VT90/5-20	125	500			
UL/LZ/VT90/5-24	125	600			
UL/LZ/VT90/5-30	125	750			
UL/LZ/VT90/5-36	125	900			
UL/LZ/VT90/5-40	125	1000			
UL/LZ/VT90/6-8	150	200			
UL/LZ/VT90/6-10	150	250			
UL/LZ/VT90/6-12	150	300			
UL/LZ/VT90/6-16	150	400			
UL/LZ/VT90/6-18	150	450			
UL/LZ/VT90/6-20	150	500			
UL/LZ/VT90/6-24	150	600			
UL/LZ/VT90/6-30	150	750			
UL/LZ/VT90/6-32	150	800			
UL/LZ/VT90/6-36	150	900			
UL/LZ/VT90/6-40	150	1000			

Dimension in Millimetre


Abbreviation: B - Rung Spacing H - Height R - Radii W- Width

When ordering Material and Finish as straight cable ladder please also indicate Radius.

Steel Cable Ladder

Steel Cable Ladder - Left Offset Reducer

Type: UL/LZ/LR

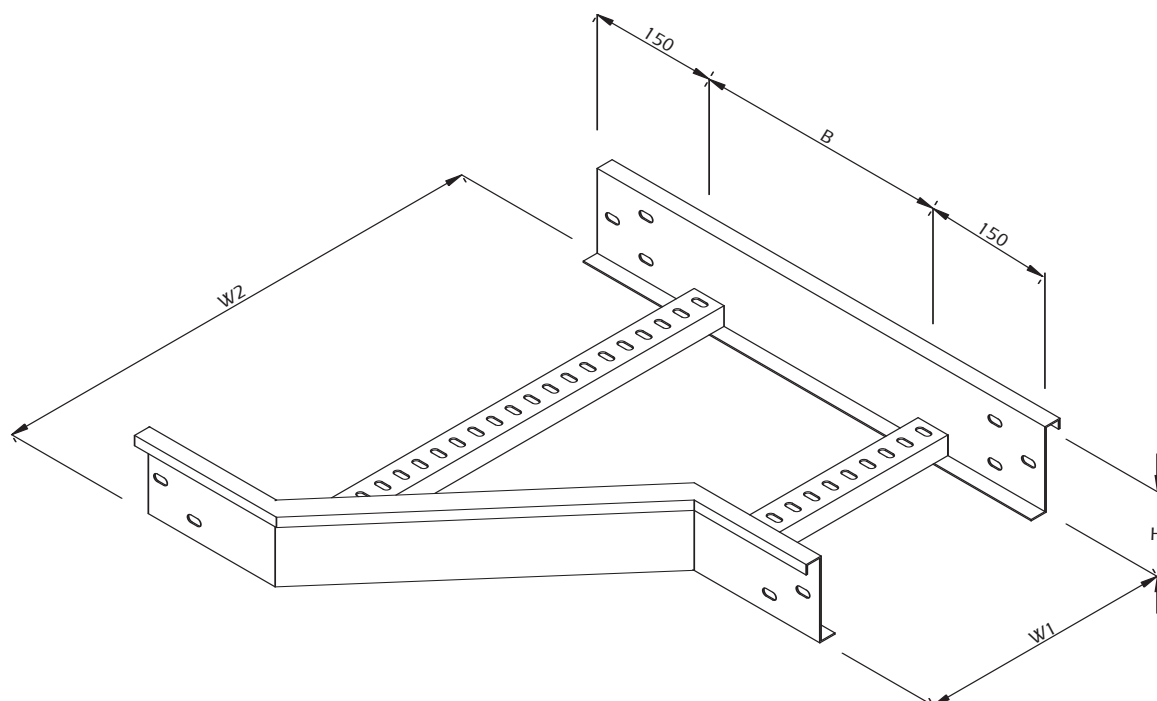

Rung Spacing 300mm

Components Ref.	H	W1	W2	Thickness	Finish
UL/LZ/LR/2-6	50	150	200 to 1000	As Straight Cable Ladder	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LZ/LR/2-8	50	200			
UL/LZ/LR/2-10	50	250			
UL/LZ/LR/2-12	50	300			
UL/LZ/LR/3-6	75	150			
UL/LZ/LR/3-8	75	200			
UL/LZ/LR/3-10	75	250			
UL/LZ/LR/3-12	75	300			
UL/LZ/LR/4-6	100	150			
UL/LZ/LR/4-8	100	200			
UL/LZ/LR/4-10	100	250			
UL/LZ/LR/4-12	100	300			
UL/LZ/LR/4-16	100	400			
UL/LZ/LR/4-18	100	450			
UL/LZ/LR/4-20	100	500			
UL/LZ/LR/4-24	100	600			
UL/LZ/LR/4-30	100	750			
UL/LZ/LR/4-36	100	900			
UL/LZ/LR/4-40	100	1000			
UL/LZ/LR/5-8	125	200			

Components Ref.	H	W1	W2	Thickness	Finish
UL/LZ/LR/5-10	125	250	200 to 1000	As Straight Cable Ladder	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LZ/LR/5-12	125	300			
UL/LZ/LR/5-16	125	400			
UL/LZ/LR/5-18	125	450			
UL/LZ/LR/5-20	125	500			
UL/LZ/LR/5-24	125	600			
UL/LZ/LR/5-30	125	750			
UL/LZ/LR/5-36	125	900			
UL/LZ/LR/5-40	125	1000			
UL/LZ/LR/6-8	150	200			
UL/LZ/LR/6-10	150	250			
UL/LZ/LR/6-12	150	300			
UL/LZ/LR/6-16	150	400			
UL/LZ/LR/6-18	150	450			
UL/LZ/LR/6-20	150	500			
UL/LZ/LR/6-24	150	600			
UL/LZ/LR/6-30	150	750			
UL/LZ/LR/6-32	150	800			
UL/LZ/LR/6-36	150	900			
UL/LZ/LR/6-40	150	1000			

Dimension in Millimetre


Abbreviation: B - Rung Spacing H - Height W - Width

When ordering Material and Finish as straight cable ladder please also indicate Width (W2).

Steel Cable Ladder

Steel Cable Ladder - Right Offset Reducer

Type: UL/LZ/RR

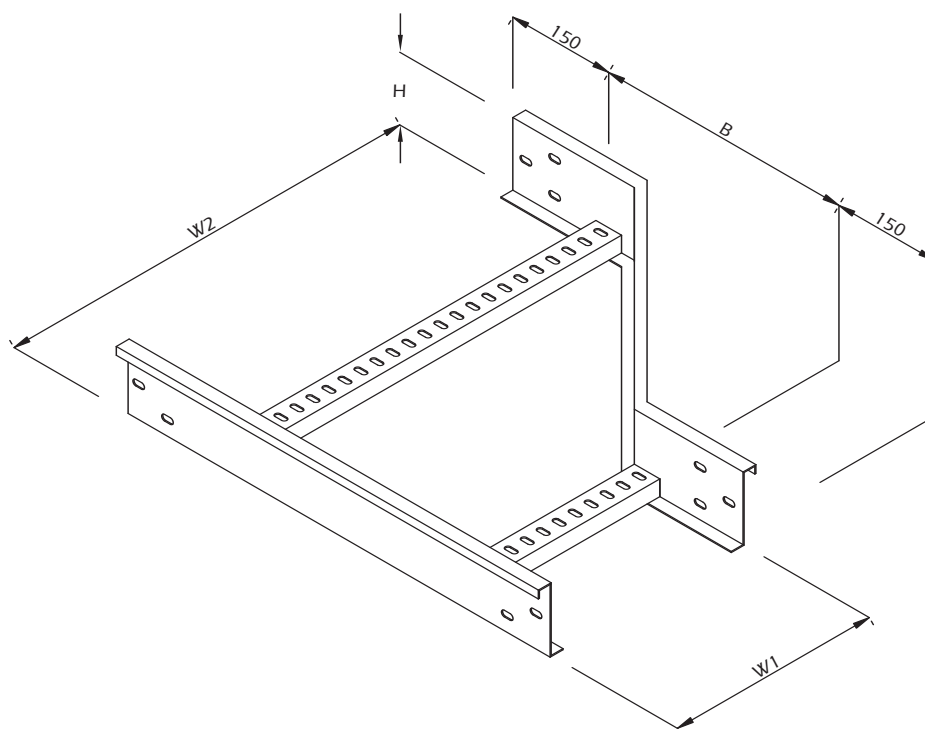

Rung Spacing 300mm

Components Ref.	H	W1	W2	Thickness	Finish
UL/LZ/RR/2-6	50	150	200 to 1000	As Straight Cable Ladder	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LZ/RR/2-8	50	200			
UL/LZ/RR/2-10	50	250			
UL/LZ/RR/2-12	50	300			
UL/LZ/RR/3-6	75	150			
UL/LZ/RR/3-8	75	200			
UL/LZ/RR/3-10	75	250			
UL/LZ/RR/3-12	75	300			
UL/LZ/RR/4-6	100	150			
UL/LZ/RR/4-8	100	200			
UL/LZ/RR/4-10	100	250			
UL/LZ/RR/4-12	100	300			
UL/LZ/RR/4-16	100	400			
UL/LZ/RR/4-18	100	450			
UL/LZ/RR/4-20	100	500			
UL/LZ/RR/4-24	100	600			
UL/LZ/RR/4-30	100	750			
UL/LZ/RR/4-36	100	900			
UL/LZ/RR/4-40	100	1000			
UL/LZ/RR/5-8	125	200			

Components Ref.	H	W1	W2	Thickness	Finish
UL/LZ/RR/5-10	125	250	200 to 1000	As Straight Cable Ladder	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LZ/RR/5-12	125	300			
UL/LZ/RR/5-16	125	400			
UL/LZ/RR/5-18	125	450			
UL/LZ/RR/5-20	125	500			
UL/LZ/RR/5-24	125	600			
UL/LZ/RR/5-30	125	750			
UL/LZ/RR/5-36	125	900			
UL/LZ/RR/5-40	125	1000			
UL/LZ/RR/6-8	150	200			
UL/LZ/RR/6-10	150	250			
UL/LZ/RR/6-12	150	300			
UL/LZ/RR/6-16	150	400			
UL/LZ/RR/6-18	150	450			
UL/LZ/RR/6-20	150	500			
UL/LZ/RR/6-24	150	600			
UL/LZ/RR/6-30	150	750			
UL/LZ/RR/6-32	150	800			
UL/LZ/RR/6-36	150	900			
UL/LZ/RR/6-40	150	1000			

Dimension in Millimetre


Abbreviation: B - Rung Spacing H - Height W - Width

When ordering Material and Finish as straight cable ladder please also indicate Width (W2).

Steel Cable Ladder

Steel Cable Ladder - Straight Offset Reducer

Type: UL/LZ/SR

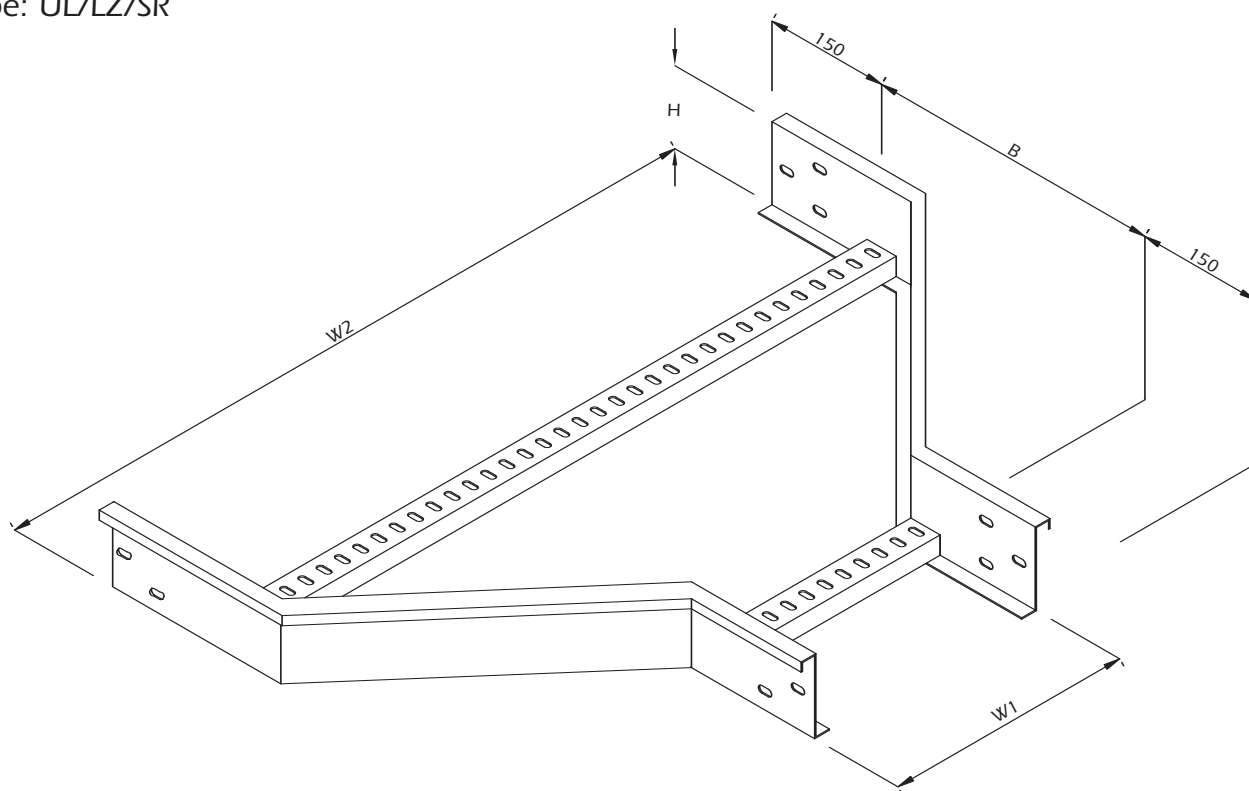

Rung Spacing 300mm

Components Ref.	H	W1	W2	Thickness	Finish
UL/LZ/SR/2-6	50	150	200 to 1000	As Straight Cable Ladder	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LZ/SR/2-8	50	200			
UL/LZ/SR/2-10	50	250			
UL/LZ/SR/2-12	50	300			
UL/LZ/SR/3-6	75	150			
UL/LZ/SR/3-8	75	200			
UL/LZ/SR/3-10	75	250			
UL/LZ/SR/3-12	75	300			
UL/LZ/SR/4-6	100	150			
UL/LZ/SR/4-8	100	200			
UL/LZ/SR/4-10	100	250			
UL/LZ/SR/4-12	100	300			
UL/LZ/SR/4-16	100	400			
UL/LZ/SR/4-18	100	450			
UL/LZ/SR/4-20	100	500			
UL/LZ/SR/4-24	100	600			
UL/LZ/SR/4-30	100	750			
UL/LZ/SR/4-36	100	900			
UL/LZ/SR/4-40	100	1000			
UL/LZ/SR/5-8	125	200			

Components Ref.	H	W1	W2	Thickness	Finish
UL/LZ/SR/5-10	125	250	200 to 1000	As Straight Cable Ladder	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LZ/SR/5-12	125	300			
UL/LZ/SR/5-16	125	400			
UL/LZ/SR/5-18	125	450			
UL/LZ/SR/5-20	125	500			
UL/LZ/SR/5-24	125	600			
UL/LZ/SR/5-30	125	750			
UL/LZ/SR/5-36	125	900			
UL/LZ/SR/5-40	125	1000			
UL/LZ/SR/6-8	150	200			
UL/LZ/SR/6-10	150	250			
UL/LZ/SR/6-12	150	300			
UL/LZ/SR/6-16	150	400			
UL/LZ/SR/6-18	150	450			
UL/LZ/SR/6-20	150	500			
UL/LZ/SR/6-24	150	600			
UL/LZ/SR/6-30	150	750			
UL/LZ/SR/6-32	150	800			
UL/LZ/SR/6-36	150	900			
UL/LZ/SR/6-40	150	1000			

Dimension in Millimetre


Abbreviation: B - Rung Spacing H - Height W - Width

When ordering Material and Finish as straight cable ladder please also indicate Width (W2).

Steel Cable Ladder

Steel Cable Ladder - Straight Divider

Type: UL/LZ/SD

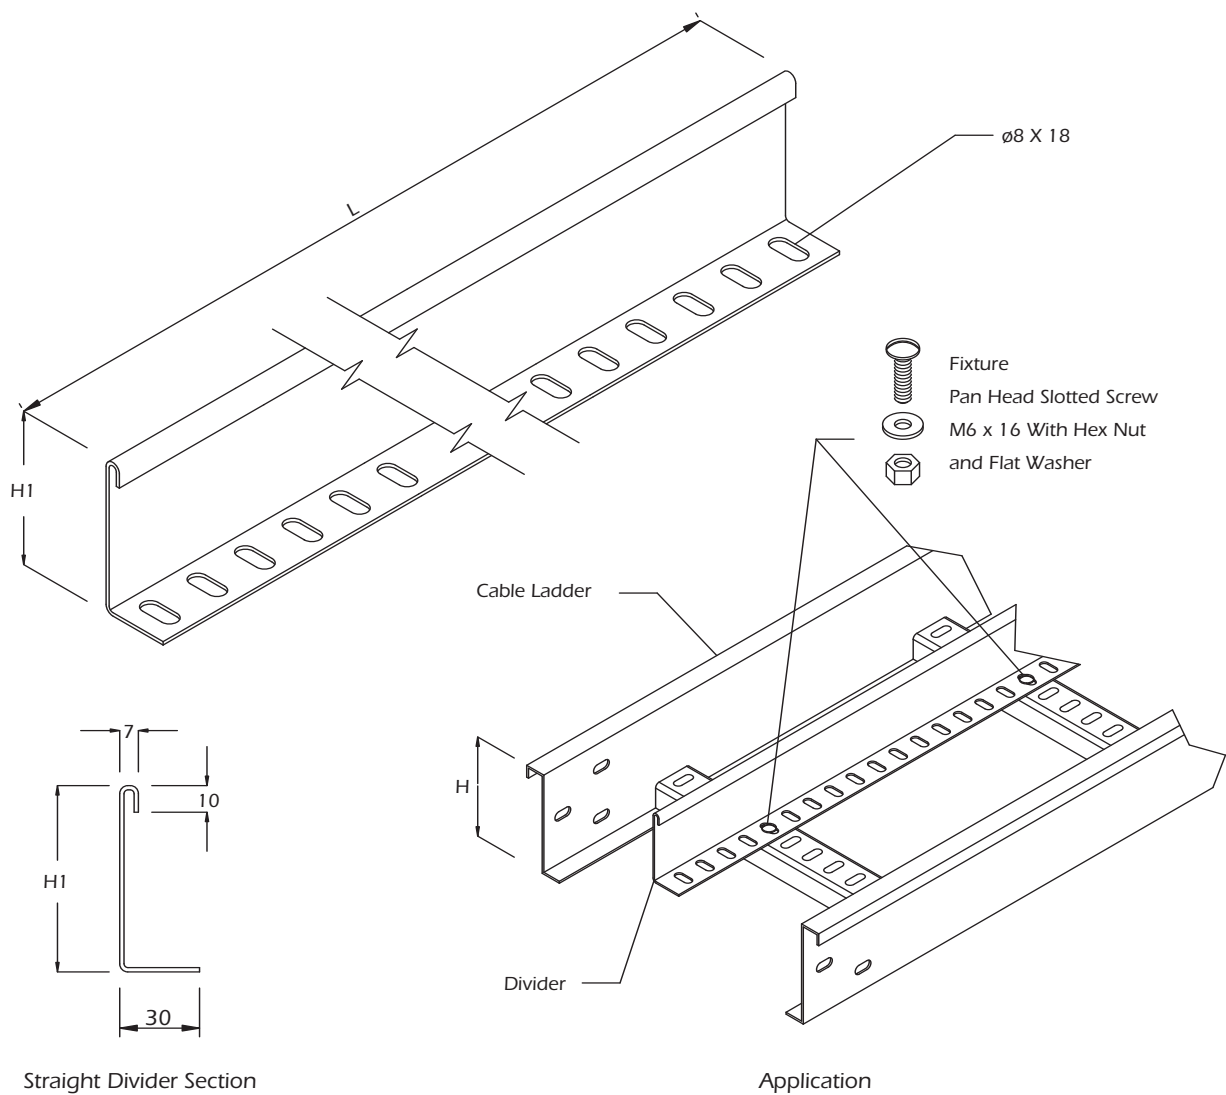

Components Ref.	H	L1	Thickness	L	Finish
UL/LZ/SD-2	50	20	1.5	1500 or 3000	Hot Dip Galvanised Epoxy or Polyester Coated Stainless
UL/LZ/SD-3	75	45	1.5		
UL/LZ/SD-4	100	70	2.0		
UL/LZ/SD-5	125	95	2.0		
UL/LZ/SD-6	150	120	2.0		


Dimension in Millimetre
 Abbreviation: H - Height L - Length

When ordering Material and Finish as straight cable ladder please also indicate Length (L).

Steel Cable Ladder

Steel Cable Ladder - Straight Cover

Type: UL/LZ/SC

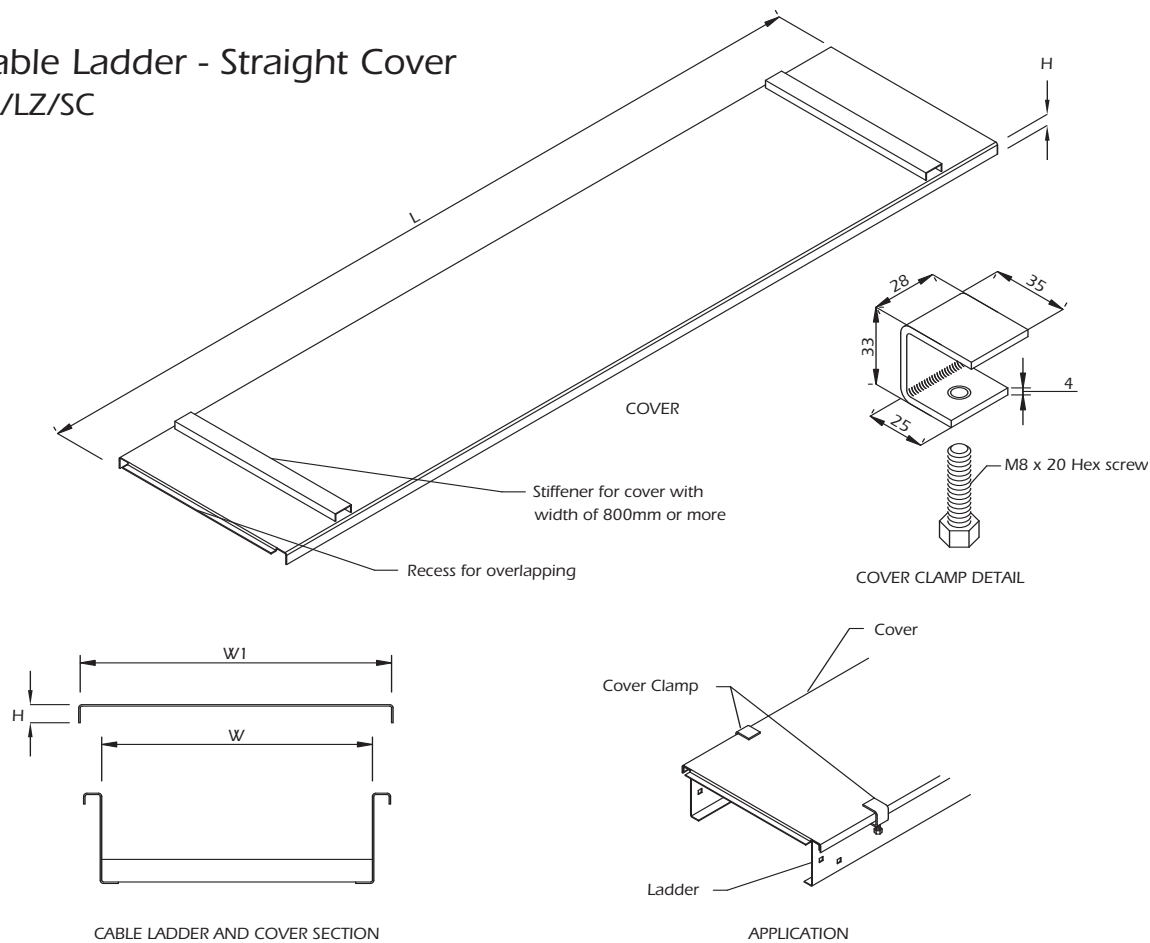

Components Ref.	H	W	W1	Thickness	L	Finish
UL/LZ/SC-1	16	150	195	1.5	1500 or 3000	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LZ/SC-2	16	200	245	1.5		
UL/LZ/SC-3	16	250	295	1.5		
UL/LZ/SC-4	16	300	345	1.5		
UL/LZ/SC-5	16	150	195	1.5		
UL/LZ/SC-6	16	200	245	1.5		
UL/LZ/SC-7	16	250	295	1.5		
UL/LZ/SC-8	16	300	345	1.5		
UL/LZ/SC-9	16	150	195	2.0		
UL/LZ/SC-10	16	200	245	2.0		
UL/LZ/SC-11	16	250	295	2.0		
UL/LZ/SC-12	16	300	345	2.0		
UL/LZ/SC-13	16	400	445	2.0		
UL/LZ/SC-14	16	450	495	2.0		
UL/LZ/SC-15	16	500	545	2.0		
UL/LZ/SC-16	16	600	645	2.0		
UL/LZ/SC-17	16	750	795	2.0		
UL/LZ/SC-18	16	900	945	2.0		
UL/LZ/SC-19	16	1000	1045	2.0		
UL/LZ/SC-20	16	200	245	2.0		

Components Ref.	H	W	W1	Thickness	L	Finish
UL/LZ/SC-21	16	250	295	2.0	1500 or 3000	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LZ/SC-22	16	300	345	2.0		
UL/LZ/SC-23	16	400	445	2.0		
UL/LZ/SC-24	16	450	495	2.0		
UL/LZ/SC-25	16	500	545	2.0		
UL/LZ/SC-26	16	600	645	2.0		
UL/LZ/SC-27	16	750	795	2.0		
UL/LZ/SC-28	16	900	945	2.0		
UL/LZ/SC-29	16	1000	1045	2.0		
UL/LZ/SC-30	16	200	245	2.0		
UL/LZ/SC-31	16	250	295	2.0		
UL/LZ/SC-32	16	300	345	2.0		
UL/LZ/SC-33	16	400	445	2.0		
UL/LZ/SC-34	16	450	495	2.0		
UL/LZ/SC-35	16	500	545	2.0		
UL/LZ/SC-36	16	600	645	2.0		
UL/LZ/SC-37	16	750	795	2.0		
UL/LZ/SC-38	16	800	845	2.0		
UL/LZ/SC-39	16	900	945	2.0		
UL/LZ/SC-40	16	1000	1045	2.0		

Components Ref.	Description
UL/LZ/CMP	Cable Ladder Cover Clamp


Dimension in Millimetre
Abbreviation: H - Height L - Length W - Width

When ordering Material and Finish as straight cable ladder please also indicate Length (L).


Steel Cable Ladder

Steel Cable Ladder - Horizontal Splice Plate

Type: UL/LZ/HS-6

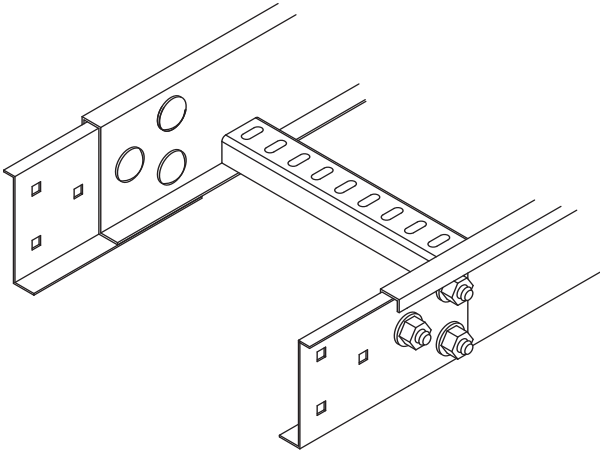

Application

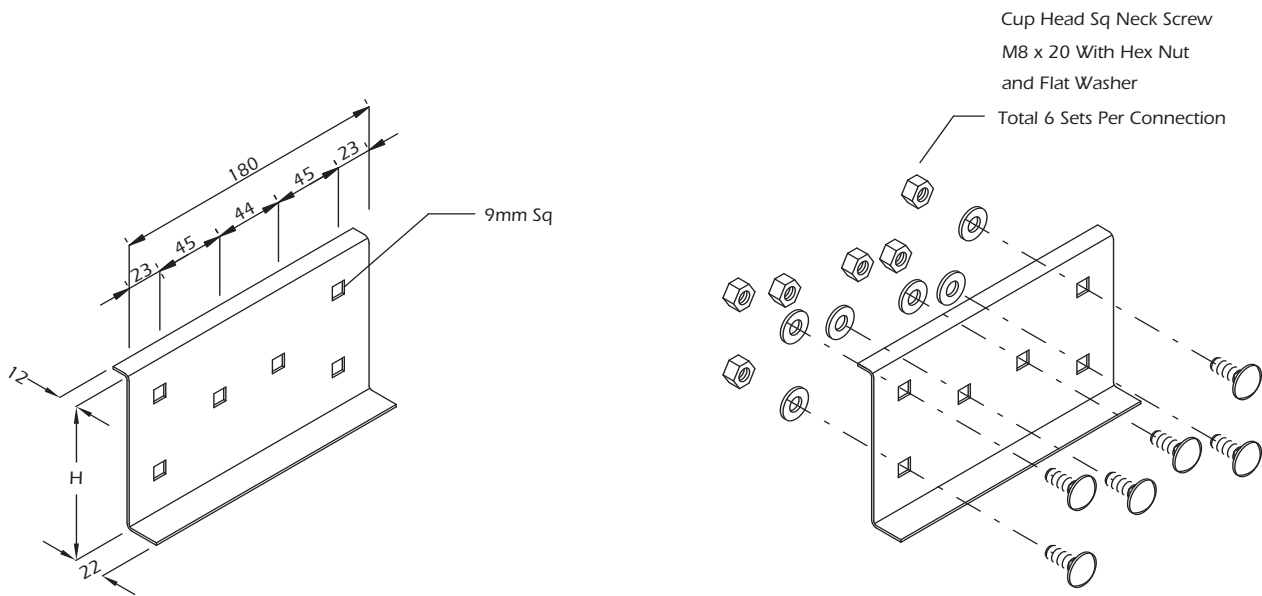

Splice Plate and Fixture

Components Ref.	Cable Ladder Height	Description	Finish
UL/LZ/HS-6-4	100	Horizontal Splite Plate With Fixture For 100mm - 125mm - 150mm Height Cable Ladder	Hot Dip Galvanised
UL/LZ/HS-6-5	125		Epoxy or Polyester Coated
UL/LZ/HS-6-6	150		Stainless


Dimension in Millimetre
Abbreviation: H - Height

Material and Finish as straight cable ladder.



Steel Cable Ladder

Steel Cable Ladder - Horizontal Splice Plate

Type: UL/LZ/HS-4

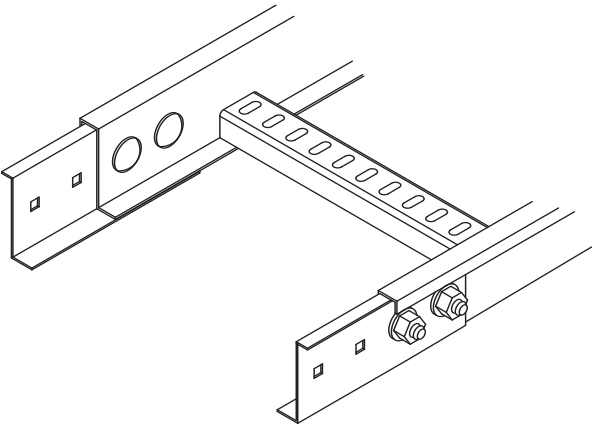

Application

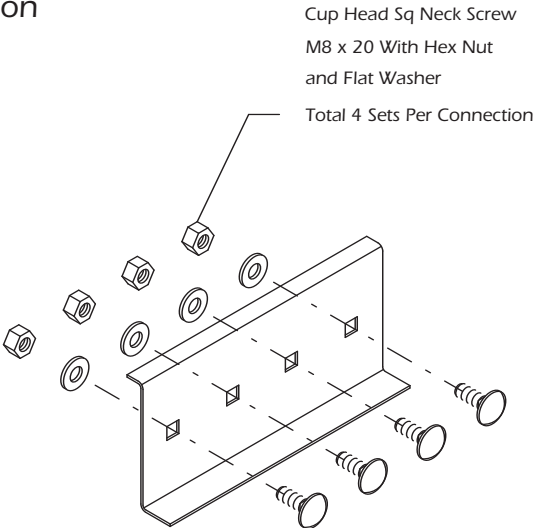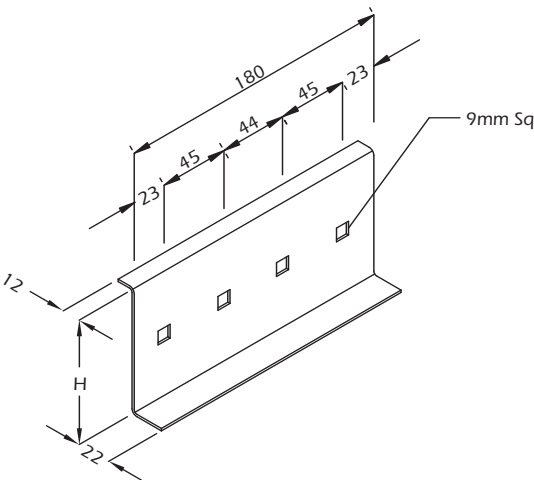

Splice Plate and Fixture

Components Ref.	Cable Ladder Height	Description	Finish
UL/LZ/HS-4-2	50	Horizontal Splice Plate With Fixture For 50mm and 75mm Height Cable Ladder	Hot Dip Galvanised
UL/LZ/HS-4-3	75		Epoxy or Polyester Coated
			Stainless


Dimension in Millimetre
Abbreviation: H - Height

Material and Finish as straight cable ladder.


Steel Cable Ladder

Steel Cable Ladder - Vertical Adjustable Splice Plate

Type: UL/LZ/VAS-6

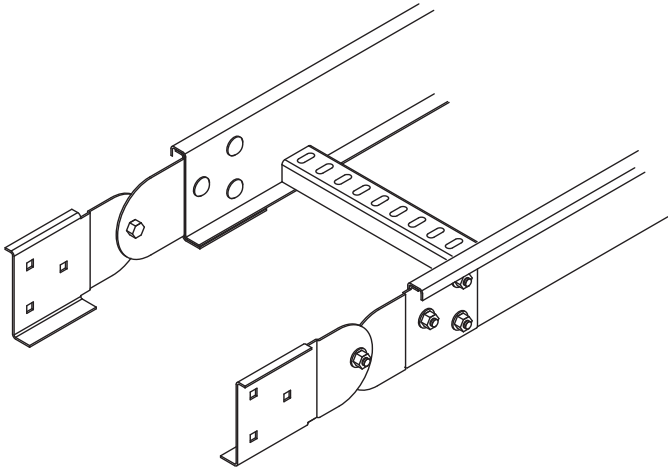

Application

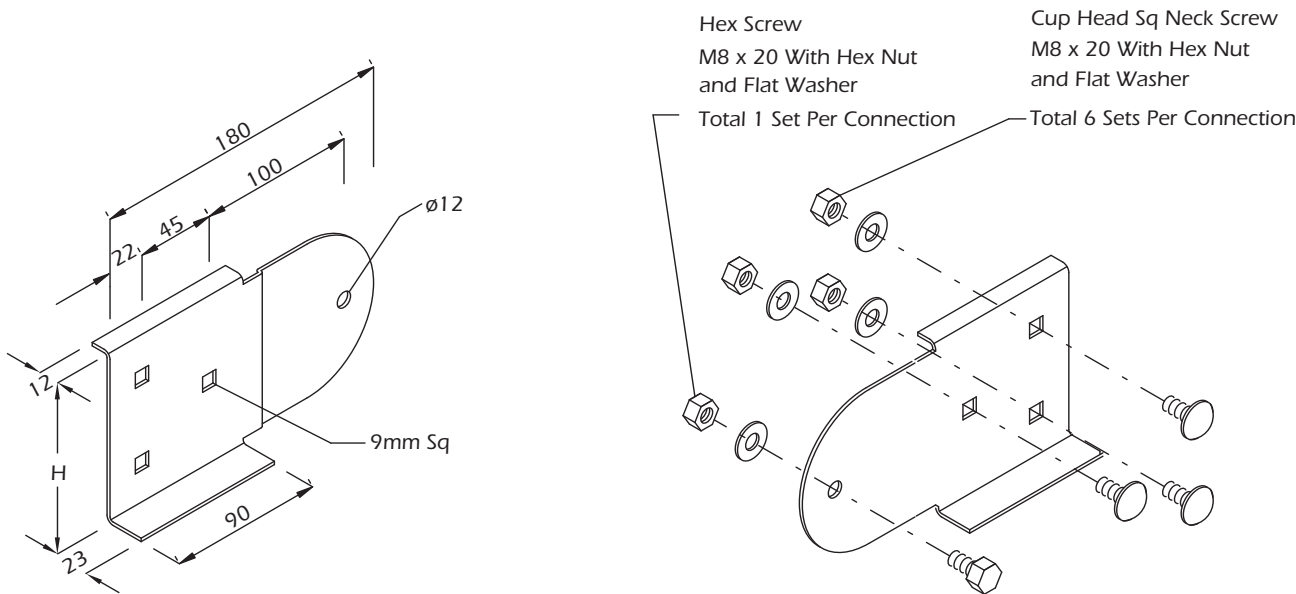

Splice Plate and Fixture

Components Ref.	Cable Ladder Height	Description	Finish
UL/LZ/VAS-6-4	100	Vertical Adjustable Splice Plate With Fixture For 100mm - 125mm - 150mm Height Cable Ladder	Hot Dip Galvanised
UL/LZ/VAS-6-5	125		Epoxy or Polyester Coated
UL/LZ/VAS-6-6	150		Stainless


Dimension in Millimetre
Abbreviation: H - Height

Material and Finish as straight cable ladder.



Steel Cable Ladder

Steel Cable Ladder - Vertical Adjustable Splice Plate

Type: UL/LZ/VAS-4

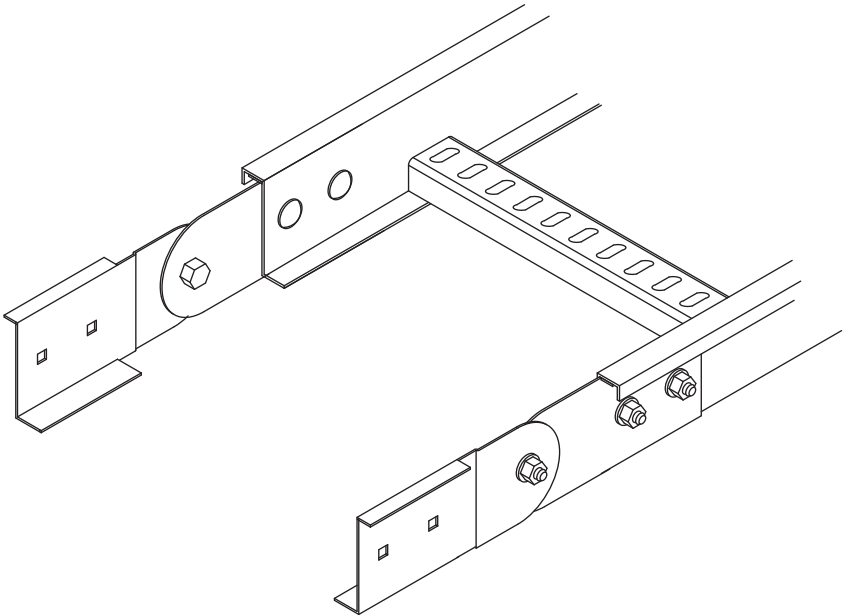

Application

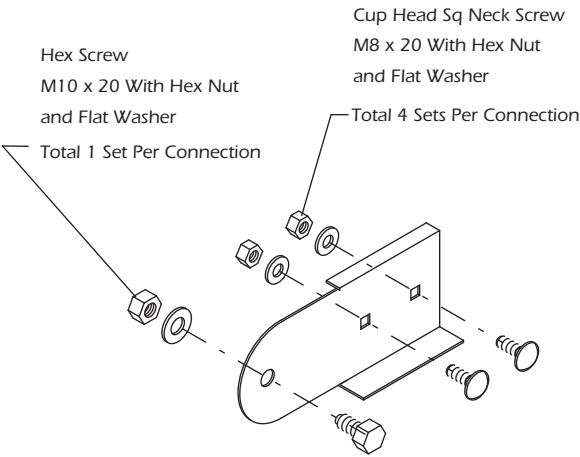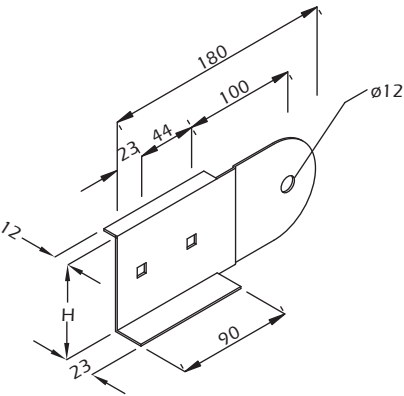

Splice Plate and Fixture

Components Ref.	Cable Ladder Height	Description	Finish
UL/LZ/VAS-4-2	50	Vertical Adjustable Splice Plate With Fixture For 50mm and 75mm Height Cable Ladder	Hot Dip Galvanised Epoxy or Polyester Coated Stainless
UL/LZ/VAS-4-3	75		


Dimension in Millimetre
Abbreviation: H - Height

Material and Finish as straight cable ladder.


Steel Cable Ladder

Steel Cable Ladder - Horizontal Adjustable Splice Plate

Type: UL/LZ/HAS-6

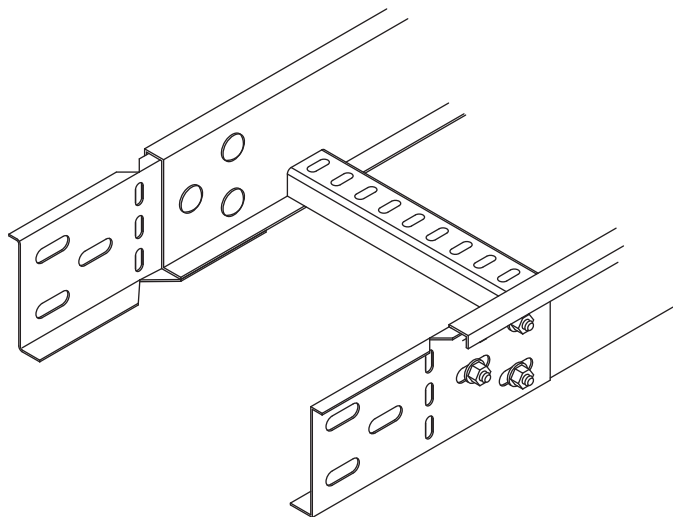

Application

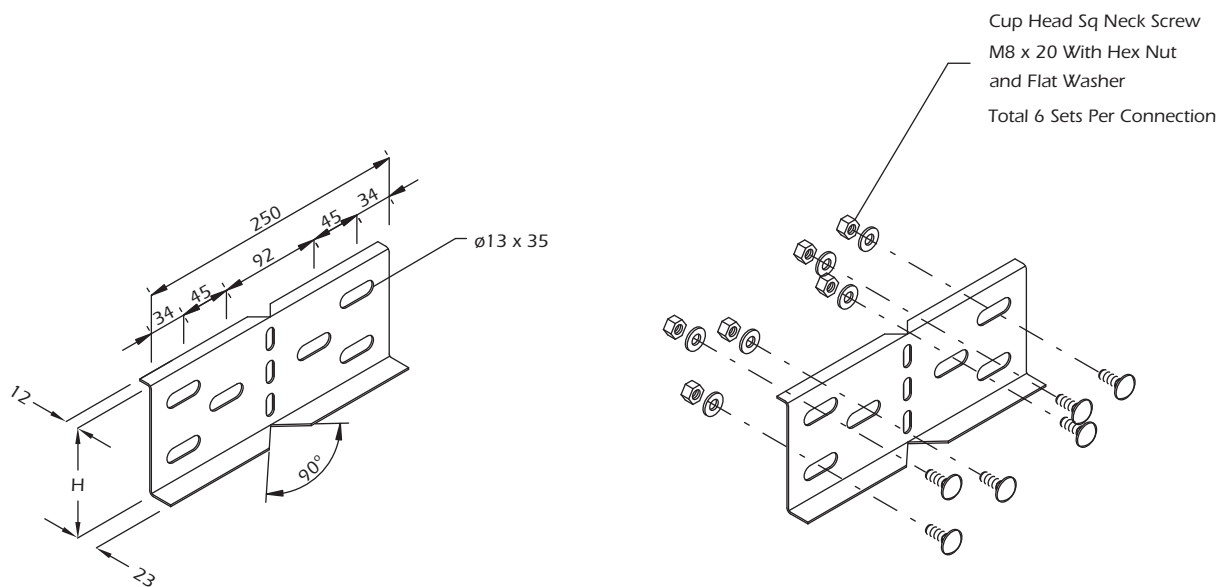

Splice Plate and Fixture

Components Ref.	Cable Ladder Height	Description	Finish
UL/LZ/HAS-6-4	100	Horizontal Adjustable Splice Plate With Fixture For 100mm-125mm-150mm Height Cable Ladder	Hot Dip Galvanised
UL/LZ/HAS-6-5	125		Epoxy or Polyester Coated
UL/LZ/HAS-6-6	150		Stainless


Dimension in Millimetre
Abbreviation: H - Height

Material and Finish as straight cable ladder.

Steel Cable Ladder

Steel Cable Ladder - Horizontal Adjustable Splice Plate

Type: UL/LZ/HAS-4

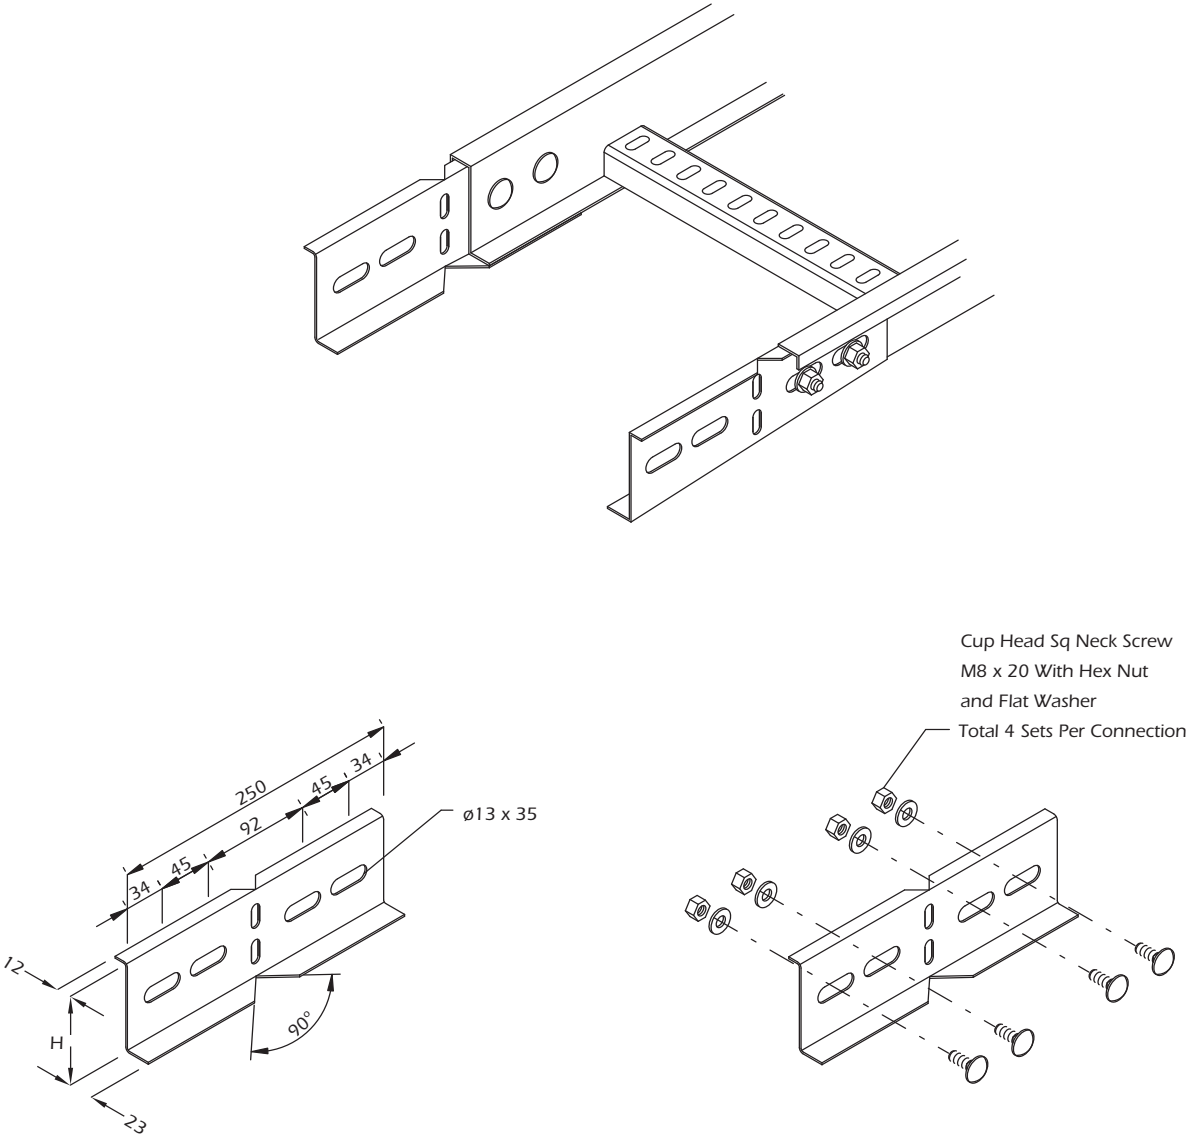

Splice Plate and Fixture

Components Ref.	Cable Ladder Height	Description	Finish
UL/LZ/HAS-4-2	50	Horizontal Adjustable Splice Plate With Fixture For 50mm and 75mm Height Cable Ladder	Hot Dip Galvanised
UL/LZ/HAS-4-3	75		Epoxy or Polyester Coated
			Stainless


Dimension in Millimetre
Abbreviation: H - Height

Material and Finish as straight cable ladder.


Steel Cable Ladder

Steel Cable Ladder - End Plate

Type: UL/LZ/EP-6

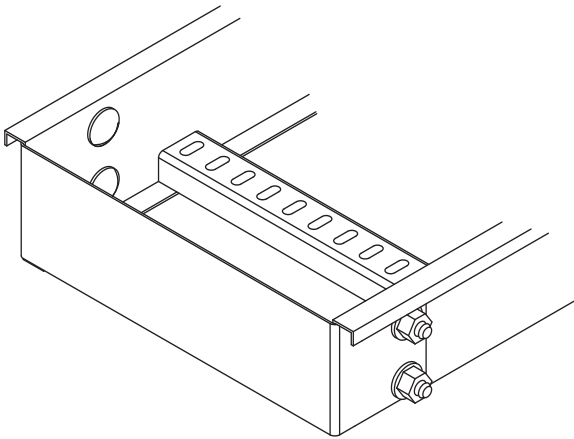

Application

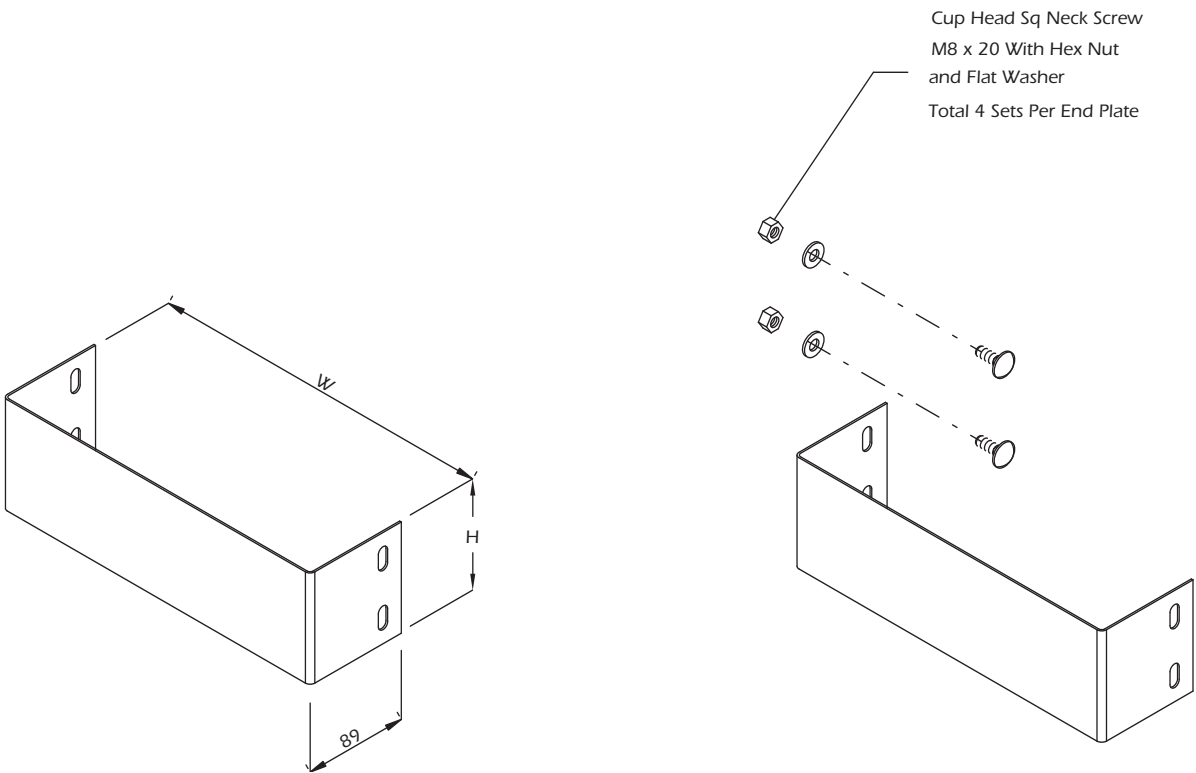

End Plate and Fixture

Components Ref.	Cable Ladder Height	H	W	Description	Finish
UL/LZ/EP-6-4	100	97	Width of Cable Ladder Plus 2mm Clearance	End Plate with Fixture	Hot Dip Galvanised Epoxy or Polyester Coated Stainless
UL/LZ/EP-6-5	125	122			
UL/LZ/EP-6-6	150	147			


Dimension in Millimetre
Abbreviation: H - Height

Material and Finish as straight cable ladder.



Steel Cable Ladder

Steel Cable Ladder - End Plate

Type: UL/LZ/EP-4

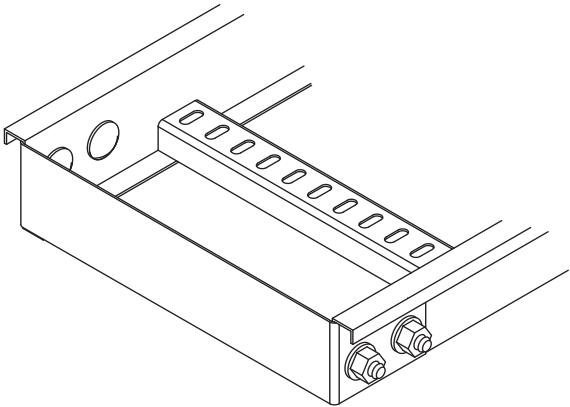

Application

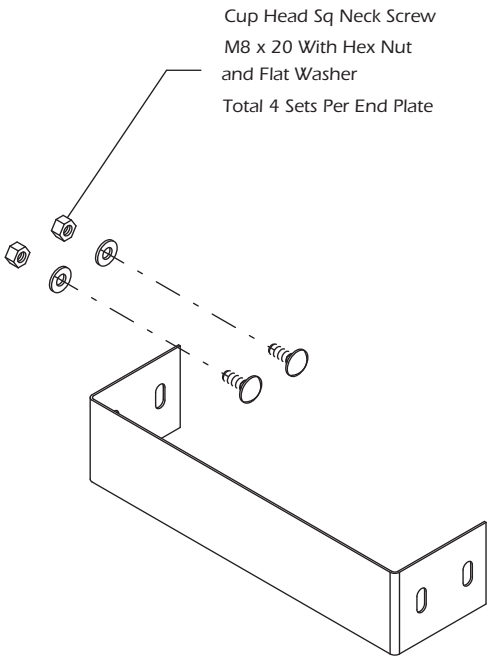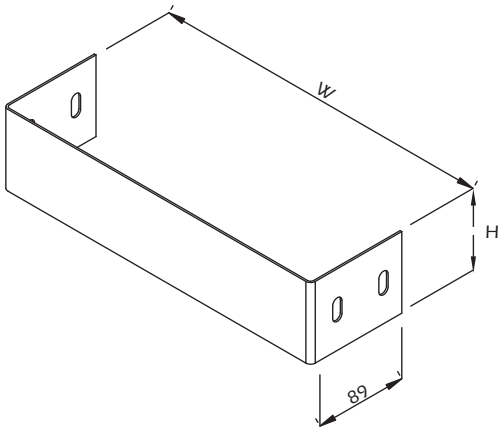

End Plate and Fixture

Components Ref.	Cable Ladder Height	H	W	Description	Finish
UL/LZ/EP-4-2	50	47	Width of Cable Ladder Plus 2mm Clearance	End Plate with Fixture	Hot Dip Galvanised Epoxy or Polyester Coated Stainless
UL/LZ/EP-4-3	75	72			


Dimension in Millimetre
Abbreviation: H - Height

Material and Finish as straight cable ladder.


Steel Cable Ladder

Steel Cable Ladder - Hold Down Clamp

Type: UL/L-CP

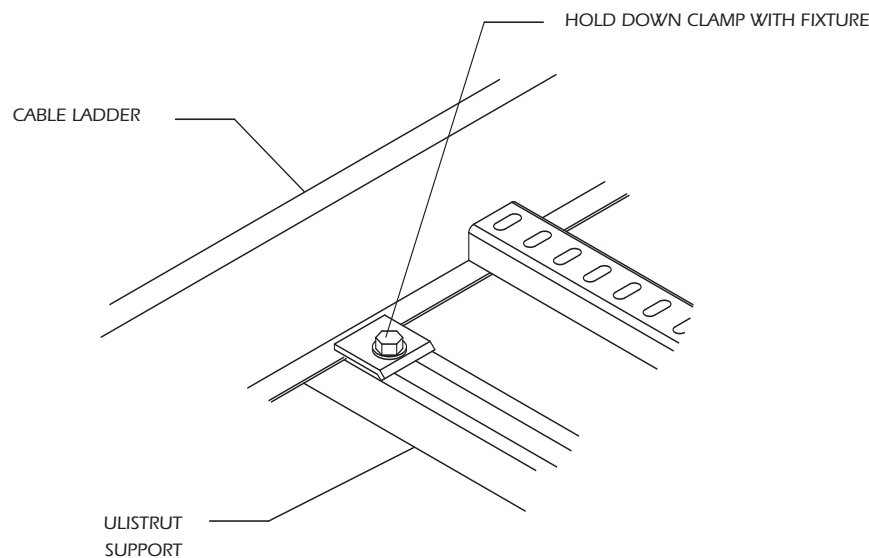

Application

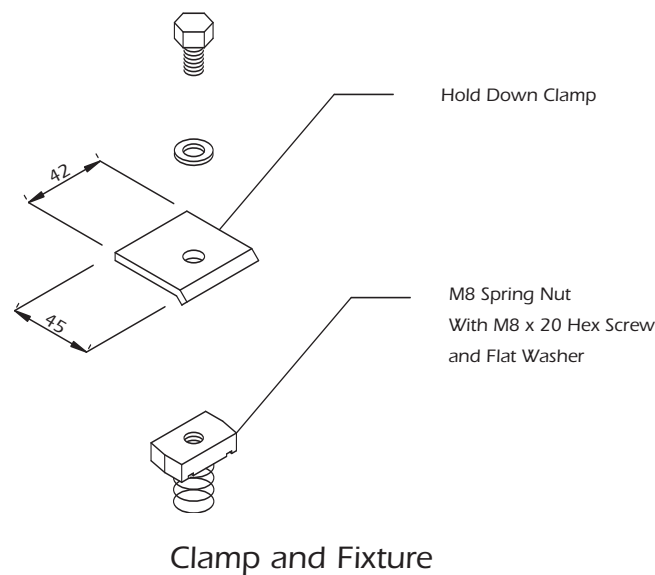

Clamp and Fixture

Components Ref.	Description	Thickness	Finish
UL/L-CP	Hold Down Clamp	4mm	Hot Dip Galvanised Epoxy or Polyester Coated Stainless


Dimension in Millimetre

When ordering please indicate Material and Finish.

Steel Cable Ladder

Steel Cable Ladder - Straight

Type: UL/LN/ST

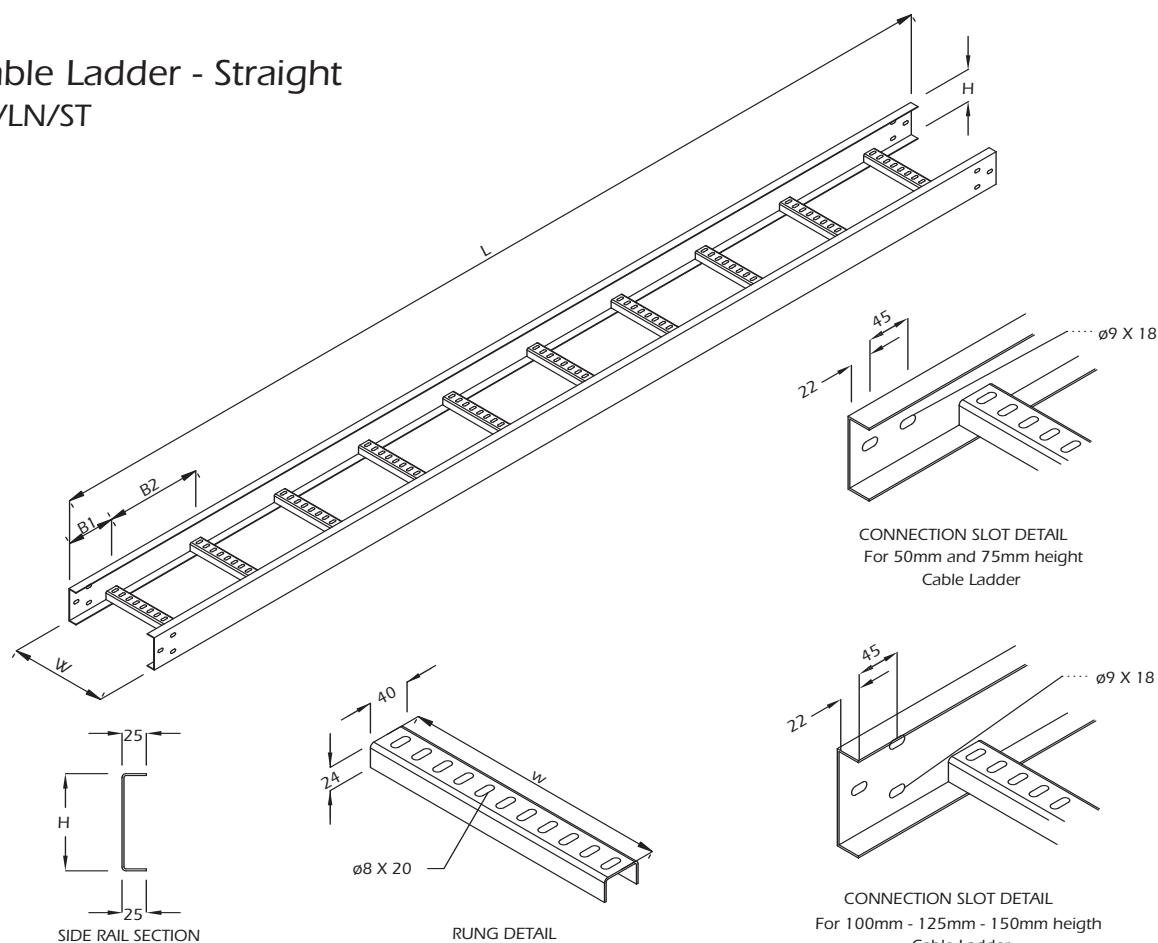

Components Ref.	H	W	B1	B2	L	Thickness	Finish
UL/LN/ST/2-6	50	150	150	300	3000	1.5	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LN/ST/2-8	50	200	150	300	3000	1.5	
UL/LN/ST/2-10	50	250	150	300	3000	1.5	
UL/LN/ST/2-12	50	300	150	300	3000	1.5	
UL/LN/ST/3-6	75	150	150	300	3000	1.5	
UL/LN/ST/3-8	75	200	150	300	3000	1.5	
UL/LN/ST/3-10	75	250	150	300	3000	1.5	
UL/LN/ST/3-12	75	300	150	300	3000	1.5	
UL/LN/ST/4-6	100	150	150	300	3000	2.0	
UL/LN/ST/4-8	100	200	150	300	3000	2.0	
UL/LN/ST/4-10	100	250	150	300	3000	2.0	
UL/LN/ST/4-12	100	300	150	300	3000	2.0	
UL/LN/ST/4-16	100	400	150	300	3000	2.0	
UL/LN/ST/4-18	100	450	150	300	3000	2.0	
UL/LN/ST/4-20	100	500	150	300	3000	2.0	
UL/LN/ST/4-24	100	600	150	300	3000	2.0	
UL/LN/ST/4-30	100	750	150	300	3000	2.0	
UL/LN/ST/4-36	100	900	150	300	3000	2.0	
UL/LN/ST/4-40	100	1000	150	300	3000	2.0	
UL/LN/ST/5-8	125	200	150	300	3000	2.0	

Components Ref.	H	W	B1	B2	L	Thickness	Finish
UL/LN/ST/5-10	125	250	150	300	3000	2.0	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LN/ST/5-12	125	300	150	300	3000	2.0	
UL/LN/ST/5-16	125	400	150	300	3000	2.0	
UL/LN/ST/5-18	125	450	150	300	3000	2.0	
UL/LN/ST/5-20	125	500	150	300	3000	2.0	
UL/LN/ST/5-24	125	600	150	300	3000	2.0	
UL/LN/ST/5-30	125	750	150	300	3000	2.0	
UL/LN/ST/5-36	125	900	150	300	3000	2.0	
UL/LN/ST/5-40	125	1000	150	300	3000	2.0	
UL/LN/ST/6-8	150	200	150	300	3000	2.0	
UL/LN/ST/6-10	150	250	150	300	3000	2.0	
UL/LN/ST/6-12	150	300	150	300	3000	2.0	
UL/LN/ST/6-16	150	400	150	300	3000	2.0	
UL/LN/ST/6-18	150	450	150	300	3000	2.0	
UL/LN/ST/6-20	150	500	150	300	3000	2.0	
UL/LN/ST/6-24	150	600	150	300	3000	2.0	
UL/LN/ST/6-30	150	750	150	300	3000	2.0	
UL/LN/ST/6-32	150	800	150	300	3000	2.0	
UL/LN/ST/6-36	150	900	150	300	3000	2.0	
UL/LN/ST/6-40	150	1000	150	300	3000	2.0	

Dimension in Millimetre

Abbreviation: W - Width H - Height B - Rung Spacing L - Length


When ordering please indicate Material and Finish.

We also supply other sizes with the same Side Rail, Rung Profile and various number of Connection Slots.

Steel Cable Ladder

Steel Cable Ladder - 90° Elbow

Type: UL/LN/EL90

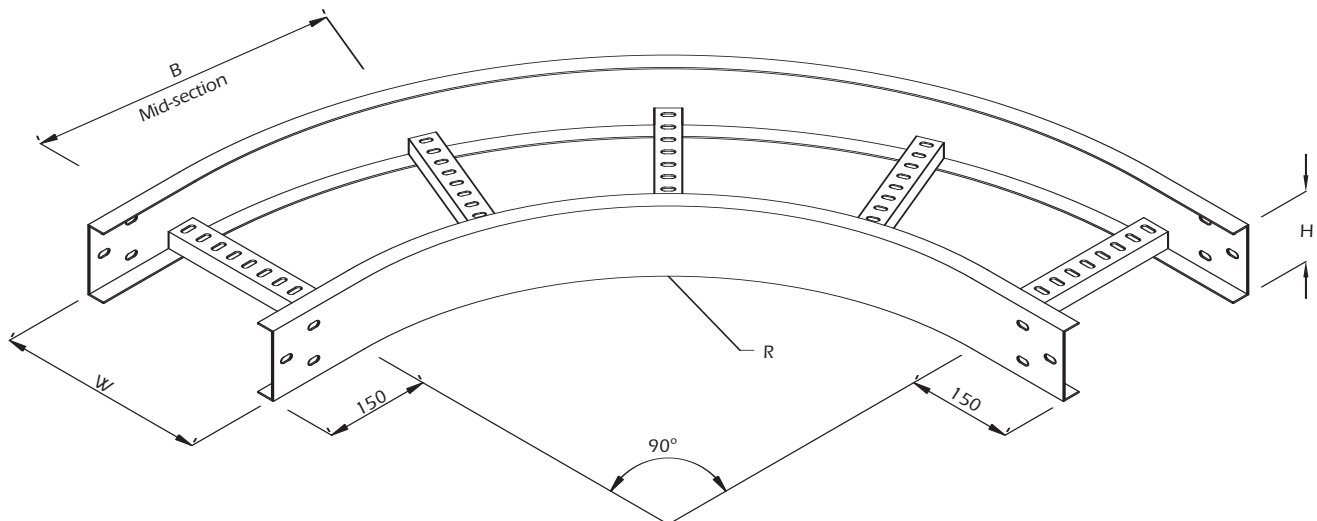

Rung Spacing 300mm

Components Ref.	H	W	Thickness	R (Radii)	Finish
UL/LN/EL90/2-6	50	150	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LN/EL90/2-8	50	200			
UL/LN/EL90/2-10	50	250			
UL/LN/EL90/2-12	50	300			
UL/LN/EL90/3-6	75	150			
UL/LN/EL90/3-8	75	200			
UL/LN/EL90/3-10	75	250			
UL/LN/EL90/3-12	75	300			
UL/LN/EL90/4-6	100	150			
UL/LN/EL90/4-8	100	200			
UL/LN/EL90/4-10	100	250			
UL/LN/EL90/4-12	100	300			
UL/LN/EL90/4-16	100	400			
UL/LN/EL90/4-18	100	450			
UL/LN/EL90/4-20	100	500			
UL/LN/EL90/4-24	100	600			
UL/LN/EL90/4-30	100	750			
UL/LN/EL90/4-36	100	900			
UL/LN/EL90/4-40	100	1000			
UL/LN/EL90/5-8	125	200			

Components Ref.	H	W	Thickness	R (Radii)	Finish
UL/LN/EL90/5-10	125	250	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LN/EL90/5-12	125	300			
UL/LN/EL90/5-16	125	400			
UL/LN/EL90/5-18	125	450			
UL/LN/EL90/5-20	125	500			
UL/LN/EL90/5-24	125	600			
UL/LN/EL90/5-30	125	750			
UL/LN/EL90/5-36	125	900			
UL/LN/EL90/5-40	125	1000			
UL/LN/EL90/6-8	150	200			
UL/LN/EL90/6-10	150	250			
UL/LN/EL90/6-12	150	300			
UL/LN/EL90/6-16	150	400			
UL/LN/EL90/6-18	150	450			
UL/LN/EL90/6-20	150	500			
UL/LN/EL90/6-24	150	600			
UL/LN/EL90/6-30	150	750			
UL/LN/EL90/6-32	150	800			
UL/LN/EL90/6-36	150	900			
UL/LN/EL90/6-40	150	1000			


Dimension in Millimetre

Abbreviation: B - Rung Spacing H - Height R - Radii W - Width

When ordering Material and Finish as straight cable ladder please also indicate Radius.

Steel Cable Ladder

Steel Cable Ladder - 45° Elbow Type: UL/LN/EL45

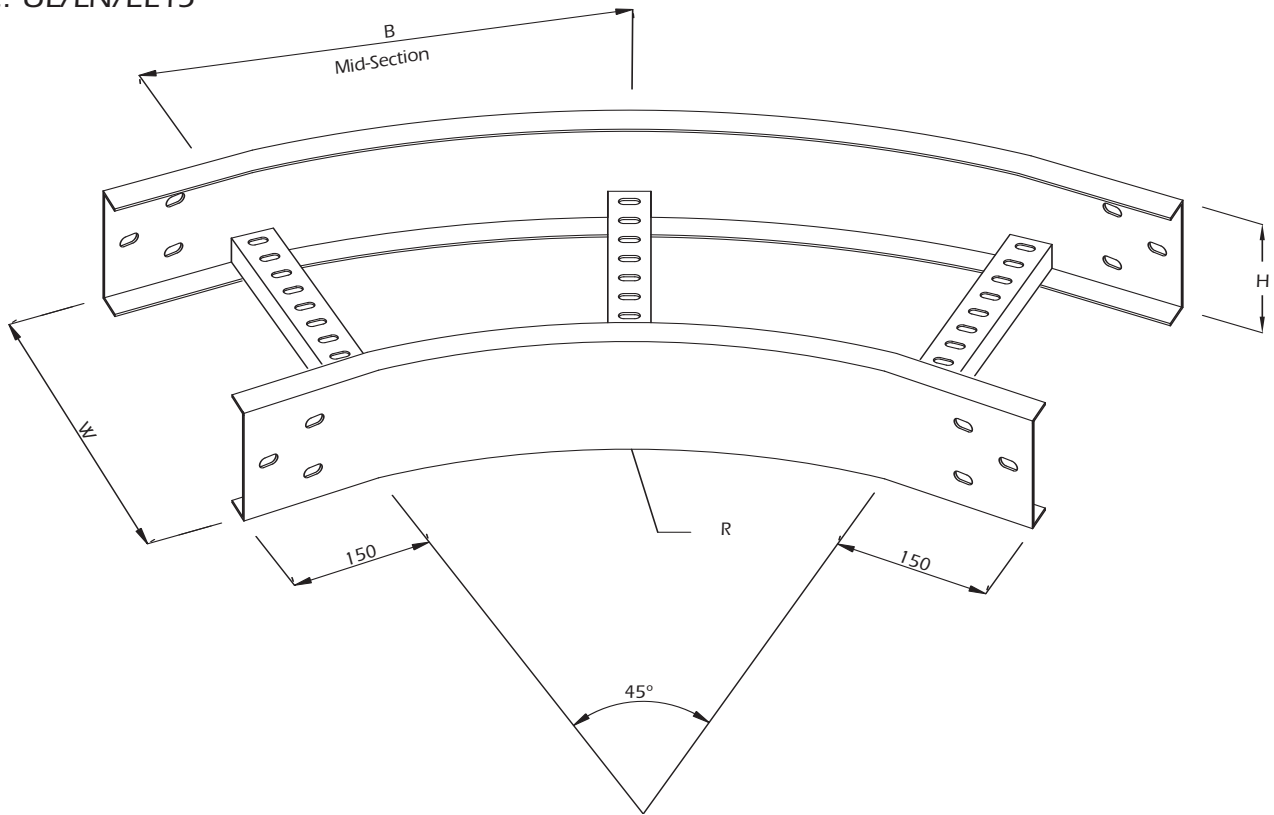

Rung Spacing 300mm

Components Ref.	H	W	Thickness	R (Radii)	Finish
UL/LN/EL45/2-6	50	150	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LN/EL45/2-8	50	200			
UL/LN/EL45/2-10	50	250			
UL/LN/EL45/2-12	50	300			
UL/LN/EL45/3-6	75	150			
UL/LN/EL45/3-8	75	200			
UL/LN/EL45/3-10	75	250			
UL/LN/EL45/3-12	75	300			
UL/LN/EL45/4-6	100	150			
UL/LN/EL45/4-8	100	200			
UL/LN/EL45/4-10	100	250			
UL/LN/EL45/4-12	100	300			
UL/LN/EL45/4-16	100	400			
UL/LN/EL45/4-18	100	450			
UL/LN/EL45/4-20	100	500			
UL/LN/EL45/4-24	100	600			
UL/LN/EL45/4-30	100	750			
UL/LN/EL45/4-36	100	900			
UL/LN/EL45/4-40	100	1000			
UL/LN/EL45/5-8	125	200			

Components Ref.	H	W	Thickness	R (Radii)	Finish
UL/LN/EL45/5-10	125	250	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LN/EL45/5-12	125	300			
UL/LN/EL45/5-16	125	400			
UL/LN/EL45/5-18	125	450			
UL/LN/EL45/5-20	125	500			
UL/LN/EL45/5-24	125	600			
UL/LN/EL45/5-30	125	750			
UL/LN/EL45/5-36	125	900			
UL/LN/EL45/5-40	125	1000			
UL/LN/EL45/6-8	150	200			
UL/LN/EL45/6-10	150	250			
UL/LN/EL45/6-12	150	300			
UL/LN/EL45/6-16	150	400			
UL/LN/EL45/6-18	150	450			
UL/LN/EL45/6-20	150	500			
UL/LN/EL45/6-24	150	600			
UL/LN/EL45/6-30	150	750			
UL/LN/EL45/6-32	150	800			
UL/LN/EL45/6-36	150	900			
UL/LN/EL45/6-40	150	1000			

Dimension in Millimetre


Abbreviation: B - Rung Spacing H - Height R - Radii W - Width

When ordering Material and Finish as straight cable ladder please also indicate Radius.

Steel Cable Ladder

Steel Cable Ladder - Horizontal Equal Tee

Type: UL/LN/ET

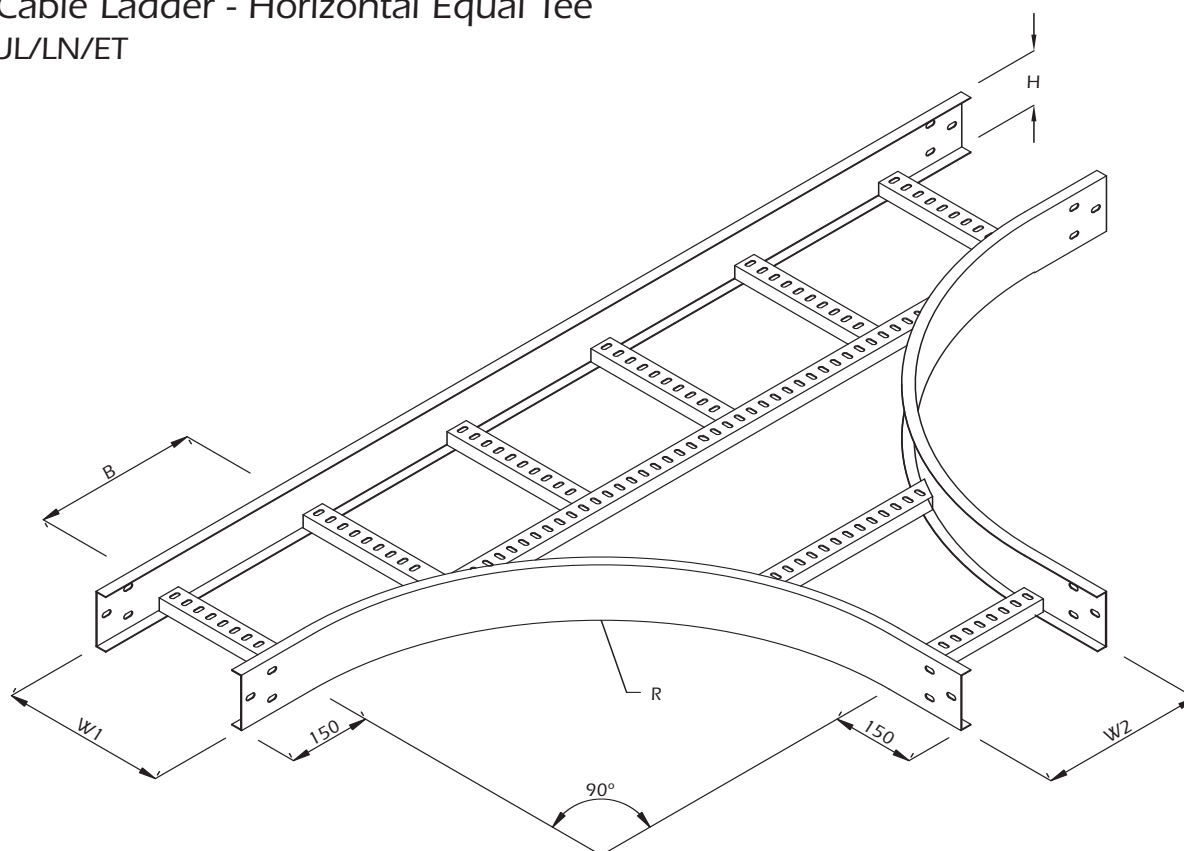

Rung Spacing 300mm

Components Ref.	H	W1	W2	Thickness	R (Radii)	Finish
UL/LN/ET/2-6	50	150	150	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LN/ET/2-8	50	200	200			
UL/LN/ET/2-10	50	250	250			
UL/LN/ET/2-12	50	300	300			
UL/LN/ET/3-6	75	150	150			
UL/LN/ET/3-8	75	200	200			
UL/LN/ET/3-10	75	250	250			
UL/LN/ET/3-12	75	300	300			
UL/LN/ET/4-6	100	150	150			
UL/LN/ET/4-8	100	200	200			
UL/LN/ET/4-10	100	250	250			
UL/LN/ET/4-12	100	300	300			
UL/LN/ET/4-16	100	400	400			
UL/LN/ET/4-18	100	450	450			
UL/LN/ET/4-20	100	500	500			
UL/LN/ET/4-24	100	600	600			
UL/LN/ET/4-30	100	750	750			
UL/LN/ET/4-36	100	900	900			
UL/LN/ET/4-40	100	1000	1000			
UL/LN/ET/5-8	125	200	200			

Components Ref.	H	W1	W2	Thickness	R (Radii)	Finish
UL/LN/ET/5-10	125	250	250	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LN/ET/5-12	125	300	300			
UL/LN/ET/5-16	125	400	400			
UL/LN/ET/5-18	125	450	450			
UL/LN/ET/5-20	125	500	500			
UL/LN/ET/5-24	125	600	600			
UL/LN/ET/5-30	125	750	750			
UL/LN/ET/5-36	125	900	900			
UL/LN/ET/5-40	125	1000	1000			
UL/LN/ET/6-8	150	200	200			
UL/LN/ET/6-10	150	250	250			
UL/LN/ET/6-12	150	300	300			
UL/LN/ET/6-16	150	400	400			
UL/LN/ET/6-18	150	450	450			
UL/LN/ET/6-20	150	500	500			
UL/LN/ET/6-24	150	600	600			
UL/LN/ET/6-30	150	750	750			
UL/LN/ET/6-32	150	800	800			
UL/LN/ET/6-36	150	900	900			
UL/LN/ET/6-40	150	1000	1000			

Dimension in Millimetre


Abbreviation: B - Rung Spacing H - Height R - Radii W - Width

When ordering Material and Finish as straight cable ladder please also indicate Radius.

Steel Cable Ladder

Steel Cable Ladder - Unequal Tee

Type: UL/LN/UT

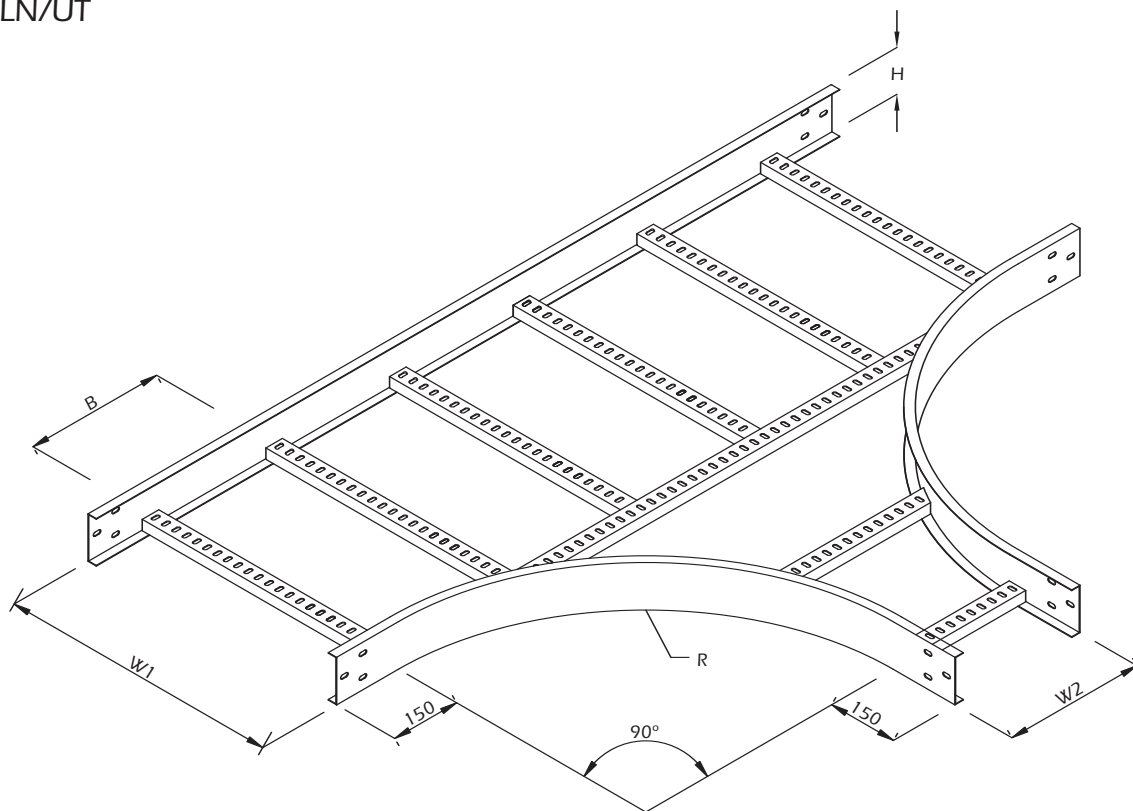

Rung Spacing 300mm

Components Ref.	H	W1	W2	Thickness	R (Radii)	Finish
UL/LN/UT/2-6	50	150	200 to 1000	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LN/UT/2-8	50	200				
UL/LN/UT/2-10	50	250				
UL/LN/UT/2-12	50	300				
UL/LN/UT/3-6	75	150				
UL/LN/UT/3-8	75	200				
UL/LN/UT/3-10	75	250				
UL/LN/UT/3-12	75	300				
UL/LN/UT/4-6	100	150				
UL/LN/UT/4-8	100	200				
UL/LN/UT/4-10	100	250				
UL/LN/UT/4-12	100	300				
UL/LN/UT/4-16	100	400				
UL/LN/UT/4-18	100	450				
UL/LN/UT/4-20	100	500				
UL/LN/UT/4-24	100	600				
UL/LN/UT/4-30	100	750				
UL/LN/UT/4-36	100	900				
UL/LN/UT/4-40	100	1000				
UL/LN/UT/5-8	125	200				

Components Ref.	H	W1	W2	Thickness	R (Radii)	Finish
UL/LN/UT/5-10	125	250	200 to 1000	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LN/UT/5-12	125	300				
UL/LN/UT/5-16	125	400				
UL/LN/UT/5-18	125	450				
UL/LN/UT/5-20	125	500				
UL/LN/UT/5-24	125	600				
UL/LN/UT/5-30	125	750				
UL/LN/UT/5-36	125	900				
UL/LN/UT/5-40	125	1000				
UL/LN/UT/6-8	150	200				
UL/LN/UT/6-10	150	250				
UL/LN/UT/6-12	150	300				
UL/LN/UT/6-16	150	400				
UL/LN/UT/6-18	150	450				
UL/LN/UT/6-20	150	500				
UL/LN/UT/6-24	150	600				
UL/LN/UT/6-30	150	750				
UL/LN/UT/6-32	150	800				
UL/LN/UT/6-36	150	900				
UL/LN/UT/6-40	150	1000				

Dimension in Millimetre


Abbreviation: B - Rung Spacing H - Height R - Radii W - Width

When ordering Material and Finish as straight cable ladder please also indicate Radius and Width (W2).

Steel Cable Ladder

Steel Cable Ladder - Equal Crosses

Type: UL/LN/EC

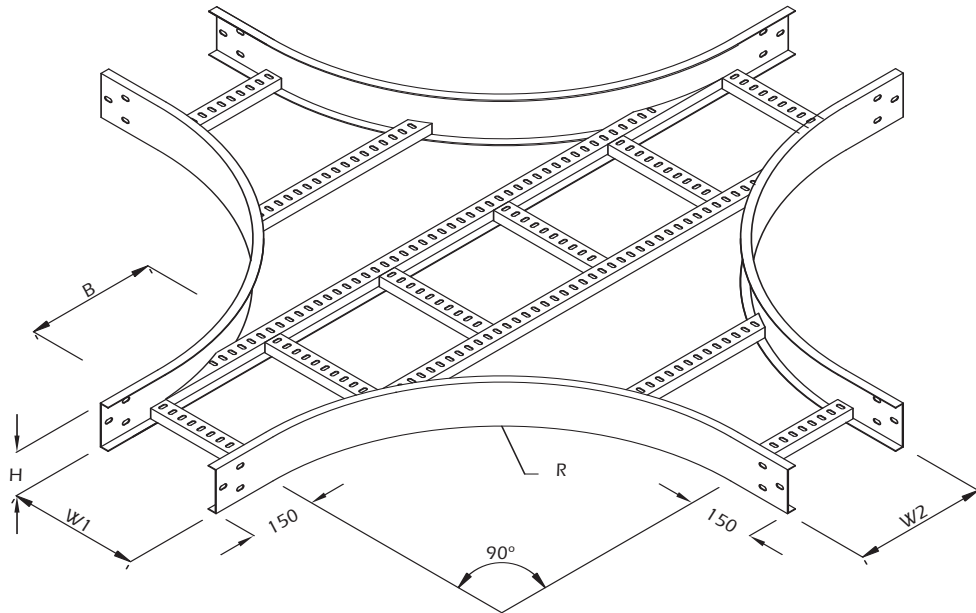

Rung Spacing 300mm

Components Ref.	H	W1	W2	Thickness	R (Radii)	Finish
UL/LN/EC/2-6	50	150	150	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LN/EC/2-8	50	200	200			
UL/LN/EC/2-10	50	250	250			
UL/LN/EC/2-12	50	300	300			
UL/LN/EC/3-6	75	150	150			
UL/LN/EC/3-8	75	200	200			
UL/LN/EC/3-10	75	250	250			
UL/LN/EC/3-12	75	300	300			
UL/LN/EC/4-6	100	150	150			
UL/LN/EC/4-8	100	200	200			
UL/LN/EC/4-10	100	250	250			
UL/LN/EC/4-12	100	300	300			
UL/LN/EC/4-16	100	400	400			
UL/LN/EC/4-18	100	450	450			
UL/LN/EC/4-20	100	500	500			
UL/LN/EC/4-24	100	600	600			
UL/LN/EC/4-30	100	750	750			
UL/LN/EC/4-36	100	900	900			
UL/LN/EC/4-40	100	1000	1000			
UL/LN/EC/5-8	125	200	200			

Components Ref.	H	W1	W2	Thickness	R (Radii)	Finish
UL/LN/EC/5-10	125	250	250	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LN/EC/5-12	125	300	300			
UL/LN/EC/5-16	125	400	400			
UL/LN/EC/5-18	125	450	450			
UL/LN/EC/5-20	125	500	500			
UL/LN/EC/5-24	125	600	600			
UL/LN/EC/5-30	125	750	750			
UL/LN/EC/5-36	125	900	900			
UL/LN/EC/5-40	125	1000	1000			
UL/LN/EC/6-8	150	200	200			
UL/LN/EC/6-10	150	250	250			
UL/LN/EC/6-12	150	300	300			
UL/LN/EC/6-16	150	400	400			
UL/LN/EC/6-18	150	450	450			
UL/LN/EC/6-20	150	500	500			
UL/LN/EC/6-24	150	600	600			
UL/LN/EC/6-30	150	750	750			
UL/LN/EC/6-32	150	800	800			
UL/LN/EC/6-36	150	900	900			
UL/LN/EC/6-40	150	1000	1000			

Dimension in Millimetre


Abbreviation: B - Rung Spacing H - Height R - Radii W - Width

When ordering Material and Finish as straight cable ladder please also indicate Radius.

Steel Cable Ladder

Steel Cable Ladder - Unequal Crosses

Type: UL/LN/UC

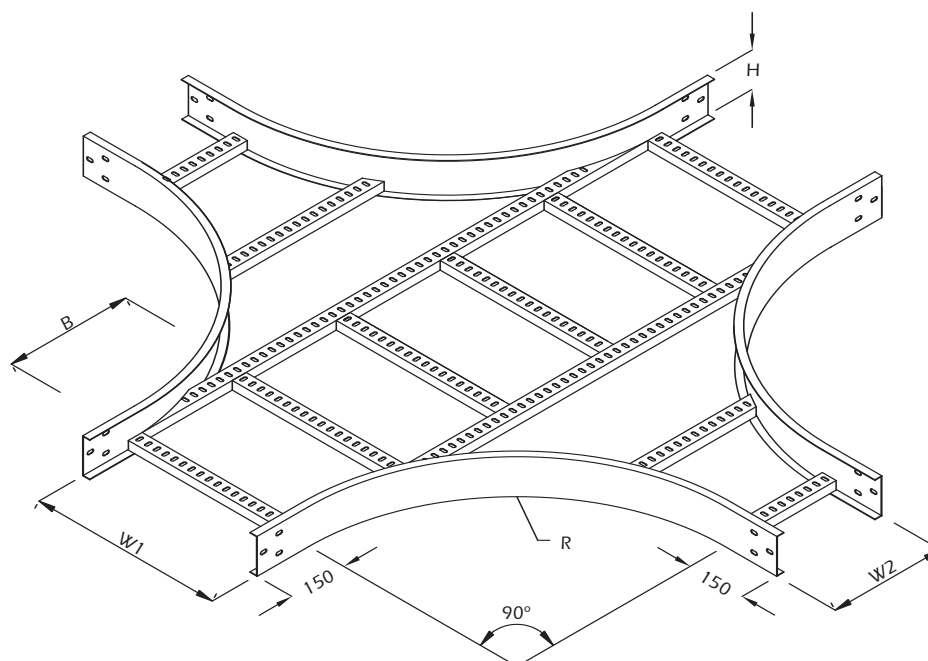

Rung Spacing 300mm

Components Ref.	H	W1	W2	Thickness	R (Radii)	Finish
UL/LN/UC/2-6	50	150	200 to 1000	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LN/UC/2-8	50	200				
UL/LN/UC/2-10	50	250				
UL/LN/UC/2-12	50	300				
UL/LN/UC/3-6	75	150				
UL/LN/UC/3-8	75	200				
UL/LN/UC/3-10	75	250				
UL/LN/UC/3-12	75	300				
UL/LN/UC/4-6	100	150				
UL/LN/UC/4-8	100	200				
UL/LN/UC/4-10	100	250				
UL/LN/UC/4-12	100	300				
UL/LN/UC/4-16	100	400				
UL/LN/UC/4-18	100	450				
UL/LN/UC/4-20	100	500				
UL/LN/UC/4-24	100	600				
UL/LN/UC/4-30	100	750				
UL/LN/UC/4-36	100	900				
UL/LN/UC/4-40	100	1000				
UL/LN/UC/5-8	125	200				

Components Ref.	H	W1	W2	Thickness	R (Radii)	Finish
UL/LN/UC/5-10	125	250	200 to 1000	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LN/UC/5-12	125	300				
UL/LN/UC/5-16	125	400				
UL/LN/UC/5-18	125	450				
UL/LN/UC/5-20	125	500				
UL/LN/UC/5-24	125	600				
UL/LN/UC/5-30	125	750				
UL/LN/UC/5-36	125	900				
UL/LN/UC/5-40	125	1000				
UL/LN/UC/6-8	150	200				
UL/LN/UC/6-10	150	250				
UL/LN/UC/6-12	150	300				
UL/LN/UC/6-16	150	400				
UL/LN/UC/6-18	150	450				
UL/LN/UC/6-20	150	500				
UL/LN/UC/6-24	150	600				
UL/LN/UC/6-30	150	750				
UL/LN/UC/6-32	150	800				
UL/LN/UC/6-36	150	900				
UL/LN/UC/6-40	150	1000				


Dimension in Millimetre

Abbreviation: B - Rung Spacing H - Height R - Radii W - Width

When ordering Material and Finish as straight cable ladder please also indicate Radius and Width (W2).

Steel Cable Ladder

Steel Cable Ladder - External Riser Type: UL/LN/ER

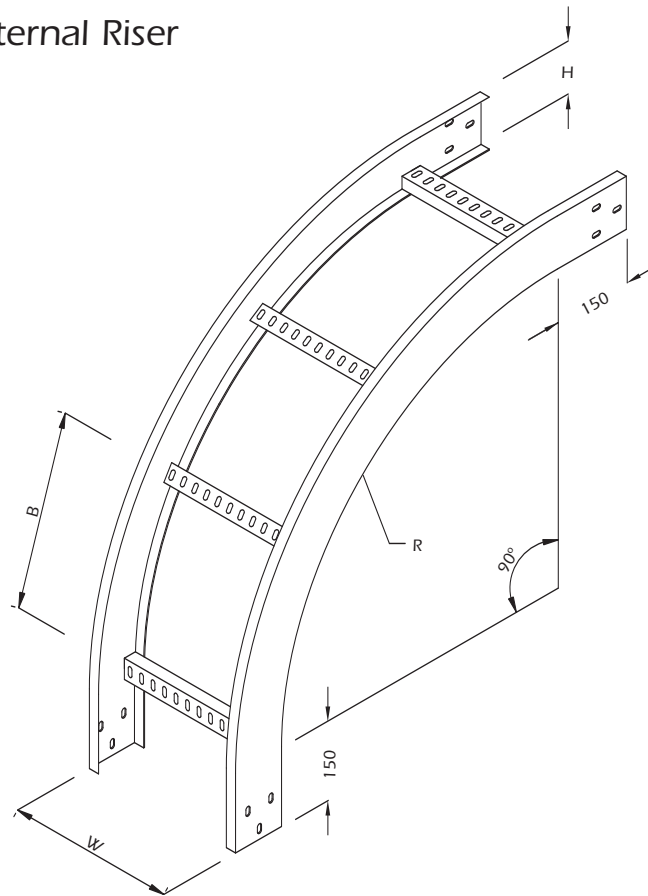

Rung Spacing 300mm

Components Ref.	H	W	Thickness	R (Radii)	Finish
UL/LN/ER/2-6	50	150	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LN/ER/2-8	50	200			
UL/LN/ER/2-10	50	250			
UL/LN/ER/2-12	50	300			
UL/LN/ER/3-6	75	150			
UL/LN/ER/3-8	75	200			
UL/LN/ER/3-10	75	250			
UL/LN/ER/3-12	75	300			
UL/LN/ER/4-6	100	150			
UL/LN/ER/4-8	100	200			
UL/LN/ER/4-10	100	250			
UL/LN/ER/4-12	100	300			
UL/LN/ER/4-16	100	400			
UL/LN/ER/4-18	100	450			
UL/LN/ER/4-20	100	500			
UL/LN/ER/4-24	100	600			
UL/LN/ER/4-30	100	750			
UL/LN/ER/4-36	100	900			
UL/LN/ER/4-40	100	1000			
UL/LN/ER/5-8	125	200			

Components Ref.	H	W	Thickness	R (Radii)	Finish
UL/LN/ER/5-10	125	250	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LN/ER/5-12	125	300			
UL/LN/ER/5-16	125	400			
UL/LN/ER/5-18	125	450			
UL/LN/ER/5-20	125	500			
UL/LN/ER/5-24	125	600			
UL/LN/ER/5-30	125	750			
UL/LN/ER/5-36	125	900			
UL/LN/ER/5-40	125	1000			
UL/LN/ER/6-8	150	200			
UL/LN/ER/6-10	150	250			
UL/LN/ER/6-12	150	300			
UL/LN/ER/6-16	150	400			
UL/LN/ER/6-18	150	450			
UL/LN/ER/6-20	150	500			
UL/LN/ER/6-24	150	600			
UL/LN/ER/6-30	150	750			
UL/LN/ER/6-32	150	800			
UL/LN/ER/6-36	150	900			
UL/LN/ER/6-40	150	1000			

Dimension in Millimetre


Abbreviation: B - Rung Spacing H - Height R - Radii W - Width

When ordering Material and Finish as straight cable ladder please also indicate Radius.

Steel Cable Ladder

Steel Cable Ladder - Internal Riser

Type: UL/LN/IR

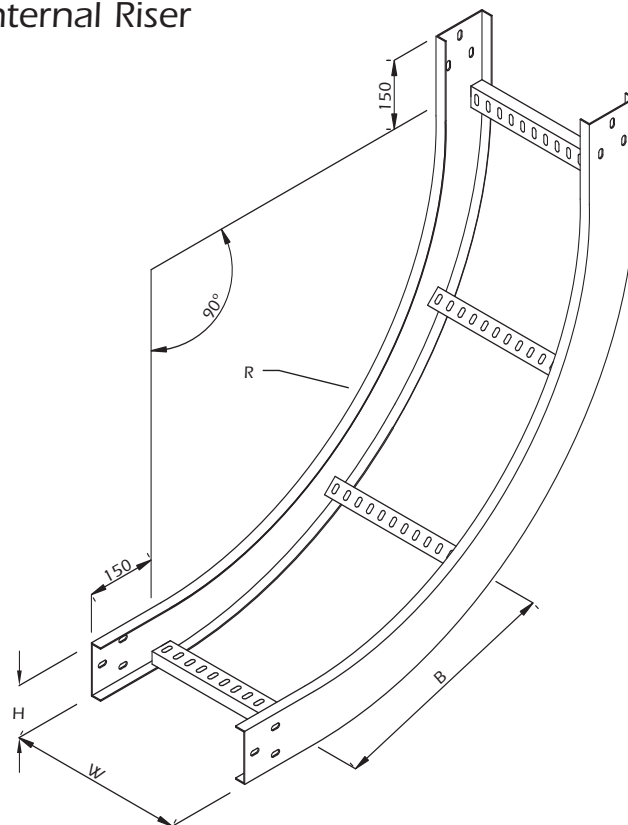

Rung Spacing 300mm

Components Ref.	H	W	Thickness	R (Radii)	Finish
UL/LN/IR/2-6	50	150	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LN/IR/2-8	50	200			
UL/LN/IR/2-10	50	250			
UL/LN/IR/2-12	50	300			
UL/LN/IR/3-6	75	150			
UL/LN/IR/3-8	75	200			
UL/LN/IR/3-10	75	250			
UL/LN/IR/3-12	75	300			
UL/LN/IR/4-6	100	150			
UL/LN/IR/4-8	100	200			
UL/LN/IR/4-10	100	250			
UL/LN/IR/4-12	100	300			
UL/LN/IR/4-16	100	400			
UL/LN/IR/4-18	100	450			
UL/LN/IR/4-20	100	500			
UL/LN/IR/4-24	100	600			
UL/LN/IR/4-30	100	750			
UL/LN/IR/4-36	100	900			
UL/LN/IR/4-40	100	1000			
UL/LN/IR/5-8	125	200			

Components Ref.	H	W	Thickness	R (Radii)	Finish
UL/LN/IR/5-10	125	250	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LN/IR/5-12	125	300			
UL/LN/IR/5-16	125	400			
UL/LN/IR/5-18	125	450			
UL/LN/IR/5-20	125	500			
UL/LN/IR/5-24	125	600			
UL/LN/IR/5-30	125	750			
UL/LN/IR/5-36	125	900			
UL/LN/IR/5-40	125	1000			
UL/LN/IR/6-8	150	200			
UL/LN/IR/6-10	150	250			
UL/LN/IR/6-12	150	300			
UL/LN/IR/6-16	150	400			
UL/LN/IR/6-18	150	450			
UL/LN/IR/6-20	150	500			
UL/LN/IR/6-24	150	600			
UL/LN/IR/6-30	150	750			
UL/LN/IR/6-32	150	800			
UL/LN/IR/6-36	150	900			
UL/LN/IR/6-40	150	1000			

Dimension in Millimetre


Abbreviation: B - Rung Spacing H - Height R - Radii W - Width

When ordering Material and Finish as straight cable ladder please also indicate Radius.

Steel Cable Ladder

Steel Cable Ladder - 90° Vertical Tee

Type: UL/LN/VT90

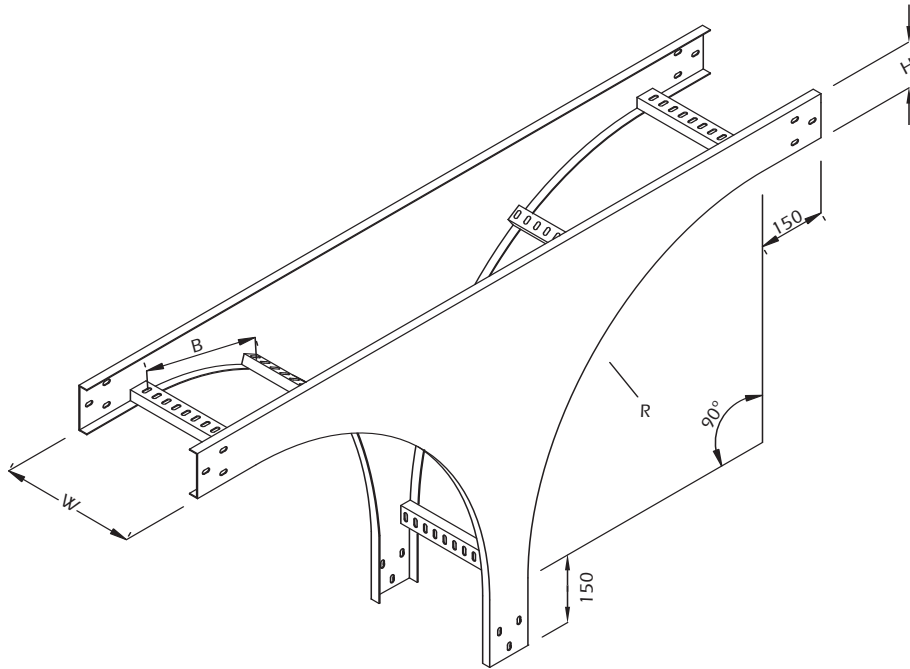

Rung Spacing 300mm

Components Ref.	H	W	Thickness	R (Radii)	Finish
UL/LN/VT90/2-6	50	150	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LN/VT90/2-8	50	200			
UL/LN/VT90/2-10	50	250			
UL/LN/VT90/2-12	50	300			
UL/LN/VT90/3-6	75	150			
UL/LN/VT90/3-8	75	200			
UL/LN/VT90/3-10	75	250			
UL/LN/VT90/3-12	75	300			
UL/LN/VT90/4-6	100	150			
UL/LN/VT90/4-8	100	200			
UL/LN/VT90/4-10	100	250			
UL/LN/VT90/4-12	100	300			
UL/LN/VT90/4-16	100	400			
UL/LN/VT90/4-18	100	450			
UL/LN/VT90/4-20	100	500			
UL/LN/VT90/4-24	100	600			
UL/LN/VT90/4-30	100	750			
UL/LN/VT90/4-36	100	900			
UL/LN/VT90/4-40	100	1000			
UL/LN/VT90/5-8	125	200			

Components Ref.	H	W	Thickness	R (Radii)	Finish
UL/LN/VT90/5-10	125	250	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LN/VT90/5-12	125	300			
UL/LN/VT90/5-16	125	400			
UL/LN/VT90/5-18	125	450			
UL/LN/VT90/5-20	125	500			
UL/LN/VT90/5-24	125	600			
UL/LN/VT90/5-30	125	750			
UL/LN/VT90/5-36	125	900			
UL/LN/VT90/5-40	125	1000			
UL/LN/VT90/6-8	150	200			
UL/LN/VT90/6-10	150	250			
UL/LN/VT90/6-12	150	300			
UL/LN/VT90/6-16	150	400			
UL/LN/VT90/6-18	150	450			
UL/LN/VT90/6-20	150	500			
UL/LN/VT90/6-24	150	600			
UL/LN/VT90/6-30	150	750			
UL/LN/VT90/6-32	150	800			
UL/LN/VT90/6-36	150	900			
UL/LN/VT90/6-40	150	1000			

Dimension in Millimetre


Abbreviation: B - Rung Spacing H - Height R - Radii W - Width

When ordering Material and Finish as straight cable ladder please also indicate Radius.

Steel Cable Ladder

Steel Cable Ladder - Left Offset Reducer

Type: UL/LN/LR

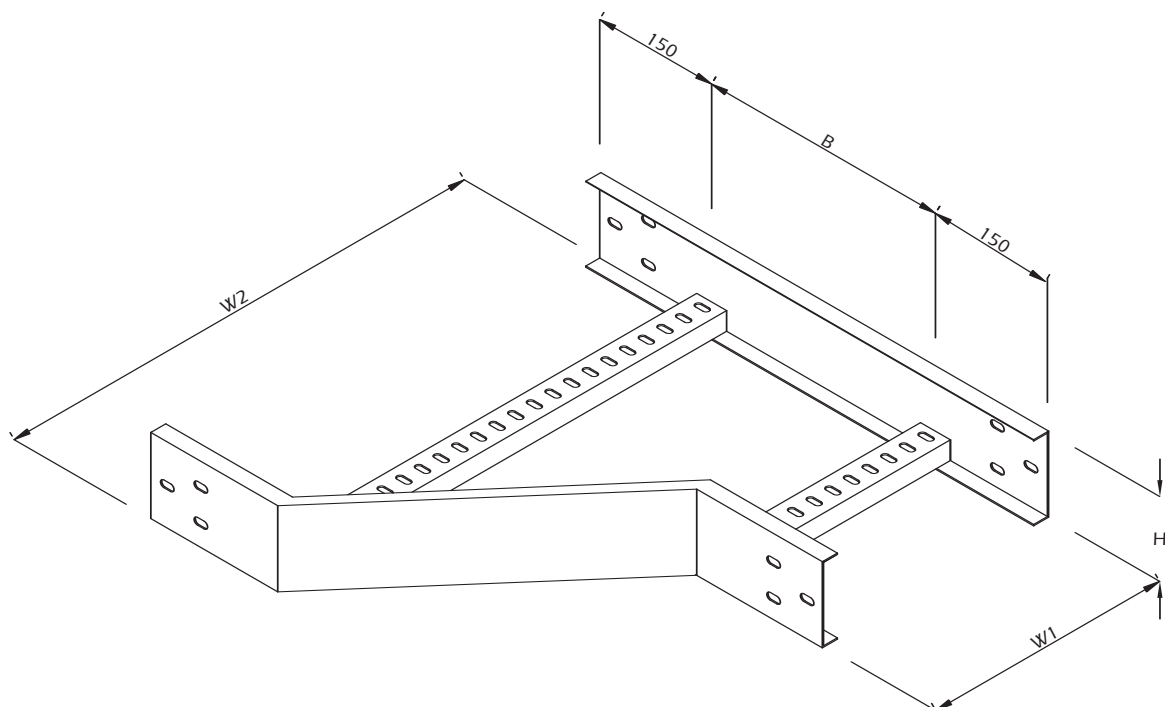

Rung Spacing 300mm

Components Ref.	H	W1	W2	Thickness	Finish
UL/LN/LR/2-6	50	150	200 to 1000	As Straight Cable Ladder	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LN/LR/2-8	50	200			
UL/LN/LR/2-10	50	250			
UL/LN/LR/2-12	50	300			
UL/LN/LR/3-6	75	150			
UL/LN/LR/3-8	75	200			
UL/LN/LR/3-10	75	250			
UL/LN/LR/3-12	75	300			
UL/LN/LR/4-6	100	150			
UL/LN/LR/4-8	100	200			
UL/LN/LR/4-10	100	250			
UL/LN/LR/4-12	100	300			
UL/LN/LR/4-16	100	400			
UL/LN/LR/4-18	100	450			
UL/LN/LR/4-20	100	500			
UL/LN/LR/4-24	100	600			
UL/LN/LR/4-30	100	750			
UL/LN/LR/4-36	100	900			
UL/LN/LR/4-40	100	1000			
UL/LN/LR/5-8	125	200			

Components Ref.	H	W1	W2	Thickness	Finish
UL/LN/LR/5-10	125	250	200 to 1000	As Straight Cable Ladder	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LN/LR/5-12	125	300			
UL/LN/LR/5-16	125	400			
UL/LN/LR/5-18	125	450			
UL/LN/LR/5-20	125	500			
UL/LN/LR/5-24	125	600			
UL/LN/LR/5-30	125	750			
UL/LN/LR/5-36	125	900			
UL/LN/LR/5-40	125	1000			
UL/LN/LR/6-8	150	200			
UL/LN/LR/6-10	150	250			
UL/LN/LR/6-12	150	300			
UL/LN/LR/6-16	150	400			
UL/LN/LR/6-18	150	450			
UL/LN/LR/6-20	150	500			
UL/LN/LR/6-24	150	600			
UL/LN/LR/6-30	150	750			
UL/LN/LR/6-32	150	800			
UL/LN/LR/6-36	150	900			
UL/LN/LR/6-40	150	1000			

Dimension in Millimetre


Abbreviation: B - Rung Spacing H - Height W - Width

When ordering Material and Finish as straight cable ladder please also indicate Width (W2).

Steel Cable Ladder

Steel Cable Ladder - Right Offset Reducer

Type: UL/LN/RR

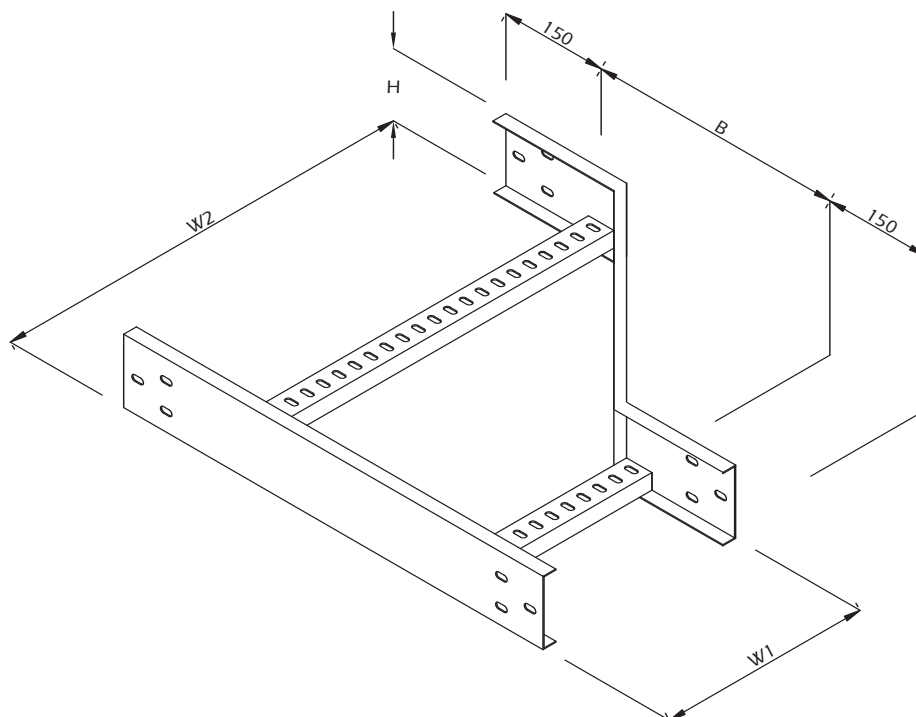

Rung Spacing 300mm

Components Ref.	H	W1	W2	Thickness	Finish
UL/LN/RR/2-6	50	150	200 to 1000	As Straight Cable Ladder	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LN/RR/2-8	50	200			
UL/LN/RR/2-10	50	250			
UL/LN/RR/2-12	50	300			
UL/LN/RR/3-6	75	150			
UL/LN/RR/3-8	75	200			
UL/LN/RR/3-10	75	250			
UL/LN/RR/3-12	75	300			
UL/LN/RR/4-6	100	150			
UL/LN/RR/4-8	100	200			
UL/LN/RR/4-10	100	250			
UL/LN/RR/4-12	100	300			
UL/LN/RR/4-16	100	400			
UL/LN/RR/4-18	100	450			
UL/LN/RR/4-20	100	500			
UL/LN/RR/4-24	100	600			
UL/LN/RR/4-30	100	750			
UL/LN/RR/4-36	100	900			
UL/LN/RR/4-40	100	1000			
UL/LN/RR/5-8	125	200			

Components Ref.	H	W1	W2	Thickness	Finish
UL/LN/RR/5-10	125	250	200 to 1000	As Straight Cable Ladder	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LN/RR/5-12	125	300			
UL/LN/RR/5-16	125	400			
UL/LN/RR/5-18	125	450			
UL/LN/RR/5-20	125	500			
UL/LN/RR/5-24	125	600			
UL/LN/RR/5-30	125	750			
UL/LN/RR/5-36	125	900			
UL/LN/RR/5-40	125	1000			
UL/LN/RR/6-8	150	200			
UL/LN/RR/6-10	150	250			
UL/LN/RR/6-12	150	300			
UL/LN/RR/6-16	150	400			
UL/LN/RR/6-18	150	450			
UL/LN/RR/6-20	150	500			
UL/LN/RR/6-24	150	600			
UL/LN/RR/6-30	150	750			
UL/LN/RR/6-32	150	800			
UL/LN/RR/6-36	150	900			
UL/LN/RR/6-40	150	1000			

Dimension in Millimetre


Abbreviation: B - Rung Spacing H - Height W - Width

When ordering Material and Finish as straight cable ladder please also indicate Width (W2).

Steel Cable Ladder

Steel Cable Ladder - Straight Offset Reducer

Type: UL/LN/SR

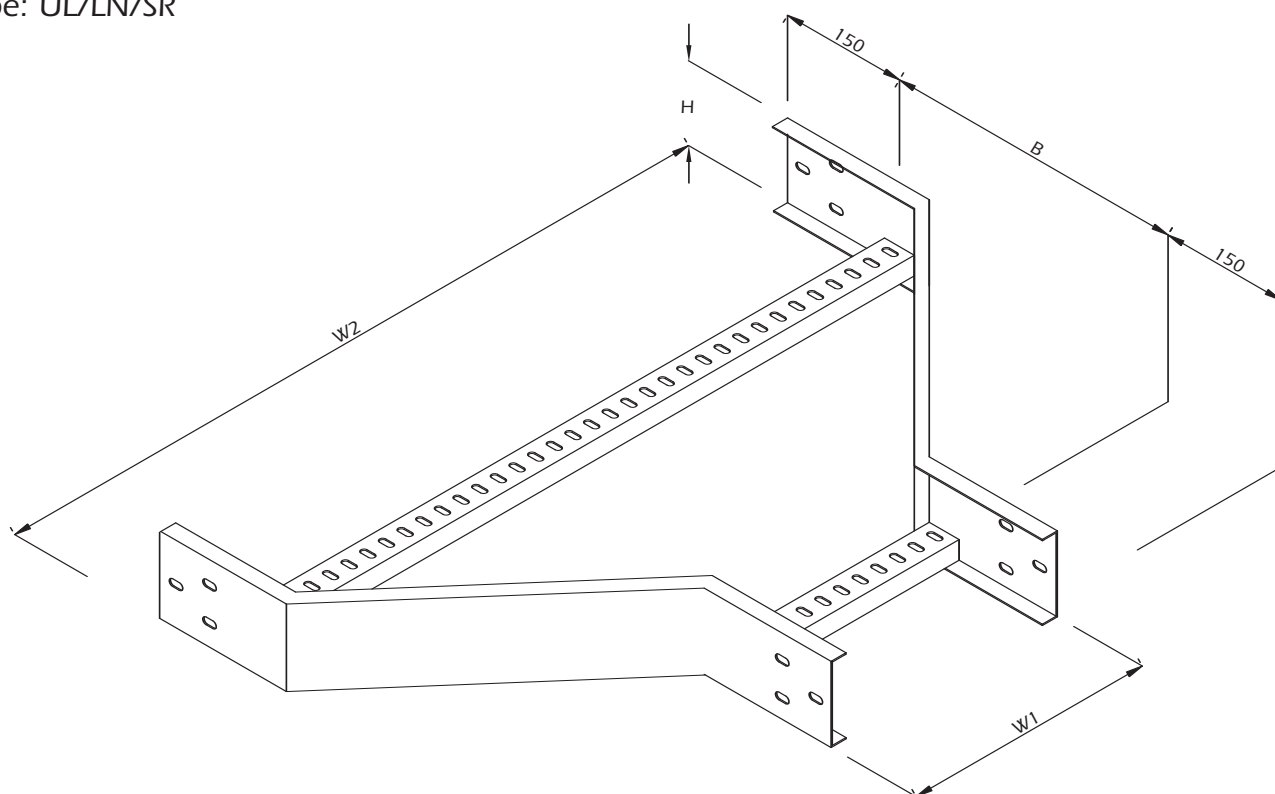

Rung Spacing 300mm

Components Ref.	H	W1	W2	Thickness	Finish
UL/LN/SR/2-6	50	150	200 to 1000	As Straight Cable Ladder	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LN/SR/2-8	50	200			
UL/LN/SR/2-10	50	250			
UL/LN/SR/2-12	50	300			
UL/LN/SR/3-6	75	150			
UL/LN/SR/3-8	75	200			
UL/LN/SR/3-10	75	250			
UL/LN/SR/3-12	75	300			
UL/LN/SR/4-6	100	150			
UL/LN/SR/4-8	100	200			
UL/LN/SR/4-10	100	250			
UL/LN/SR/4-12	100	300			
UL/LN/SR/4-16	100	400			
UL/LN/SR/4-18	100	450			
UL/LN/SR/4-20	100	500			
UL/LN/SR/4-24	100	600			
UL/LN/SR/4-30	100	750			
UL/LN/SR/4-36	100	900			
UL/LN/SR/4-40	100	1000			
UL/LN/SR/5-8	125	200			

Components Ref.	H	W1	W2	Thickness	Finish
UL/LN/SR/5-10	125	250	200 to 1000	As Straight Cable Ladder	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LN/SR/5-12	125	300			
UL/LN/SR/5-16	125	400			
UL/LN/SR/5-18	125	450			
UL/LN/SR/5-20	125	500			
UL/LN/SR/5-24	125	600			
UL/LN/SR/5-30	125	750			
UL/LN/SR/5-36	125	900			
UL/LN/SR/5-40	125	1000			
UL/LN/SR/6-8	150	200			
UL/LN/SR/6-10	150	250			
UL/LN/SR/6-12	150	300			
UL/LN/SR/6-16	150	400			
UL/LN/SR/6-18	150	450			
UL/LN/SR/6-20	150	500			
UL/LN/SR/6-24	150	600			
UL/LN/SR/6-30	150	750			
UL/LN/SR/6-32	150	800			
UL/LN/SR/6-36	150	900			
UL/LN/SR/6-40	150	1000			

Dimension in Millimetre


Abbreviation: B - Rung Spacing H - Height W - Width

When ordering Material and Finish as straight cable ladder please also indicate Width (W2).

Steel Cable Ladder

Steel Cable Ladder - Straight Divider

Type: UL/LN/SD

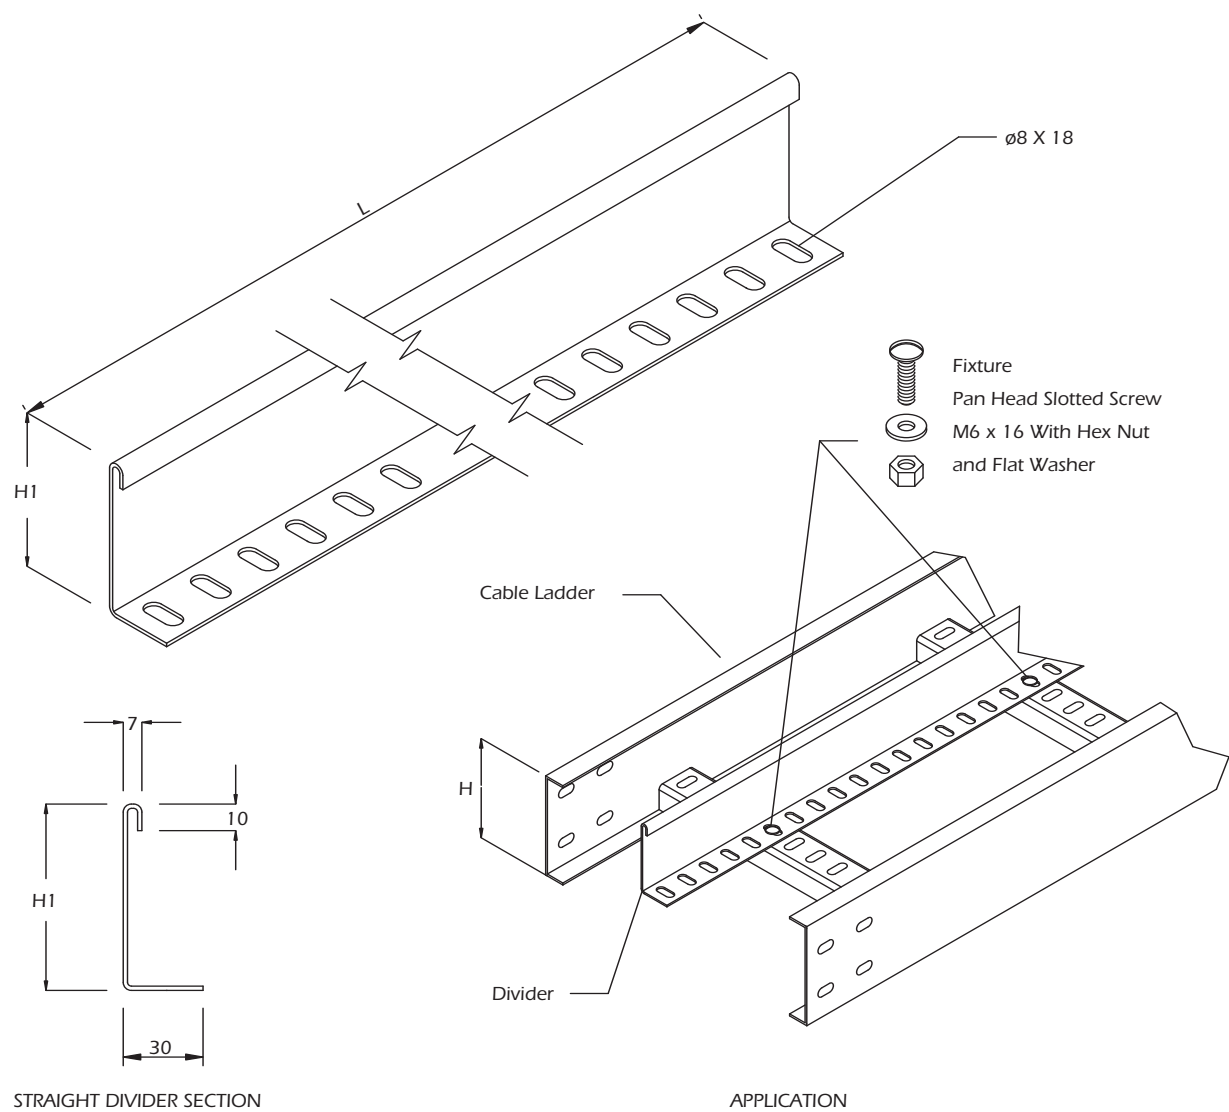

Components Ref.	H	H1	Thickness	L	Finish
UL/LN/SD-2	50	20	1.5	1500 or 3000	Hot Dip Galvanised Epoxy or Polyester Coated Stainless
UL/LN/SD-3	75	45	1.5		
UL/LN/SD-4	100	70	2.0		
UL/LN/SD-5	125	95	2.0		
UL/LN/SD-6	150	120	2.0		


Dimension in Millimetre
Abbreviation: H - Height L - Length

When ordering Material and Finish as straight cable ladder please also indicate Length (L).

Steel Cable Ladder

Steel Cable Ladder - Straight Cover

Type: UL/LN/SC

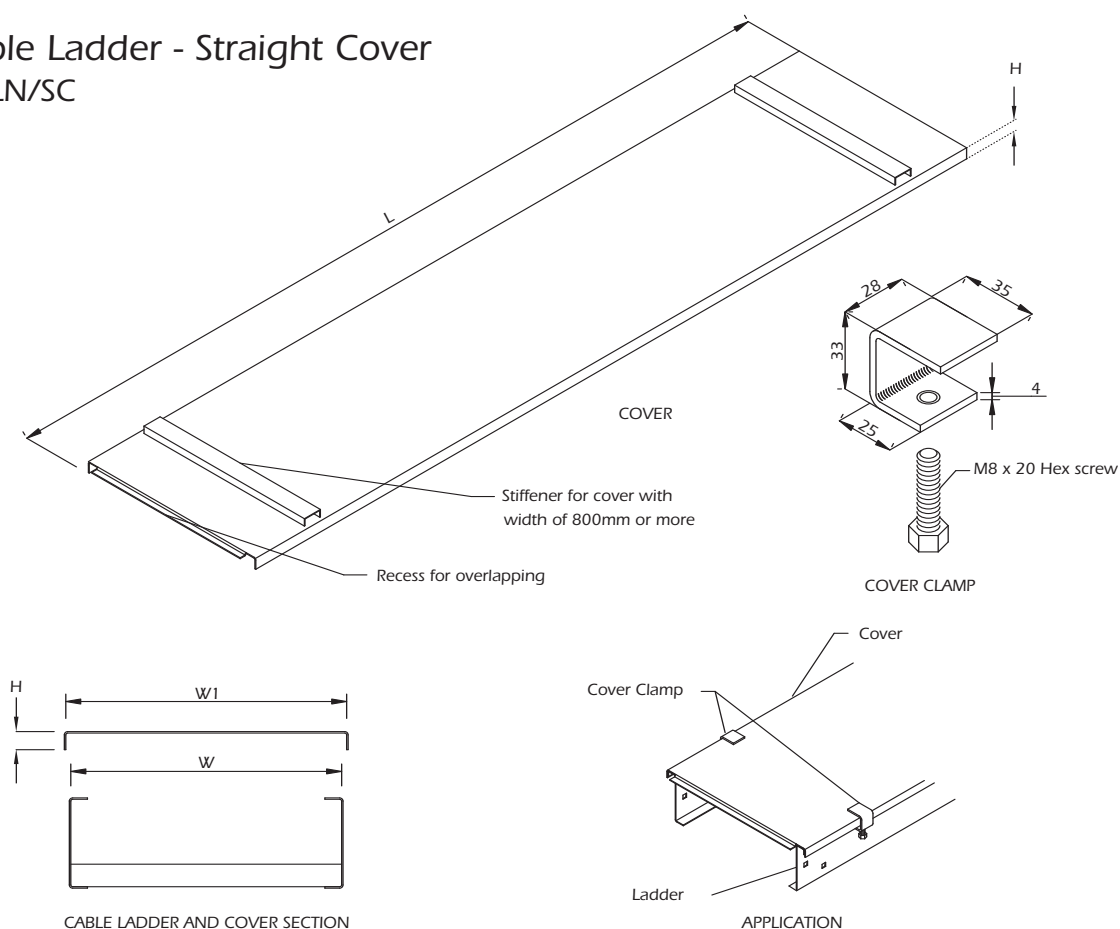

Components Ref.	H	W	W1	Thickness	L	Finish
UL/LN/SC-1	16	150	195	1.5	1500 or 3000	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LN/SC-2	16	200	245	1.5		
UL/LN/SC-3	16	250	295	1.5		
UL/LN/SC-4	16	300	345	1.5		
UL/LN/SC-5	16	150	195	1.5		
UL/LN/SC-6	16	200	245	1.5		
UL/LN/SC-7	16	250	295	1.5		
UL/LN/SC-8	16	300	345	1.5		
UL/LN/SC-9	16	150	195	2.0		
UL/LN/SC-10	16	200	245	2.0		
UL/LN/SC-11	16	250	295	2.0		
UL/LN/SC-12	16	300	345	2.0		
UL/LN/SC-13	16	400	445	2.0		
UL/LN/SC-14	16	450	495	2.0		
UL/LN/SC-15	16	500	545	2.0		
UL/LN/SC-16	16	600	645	2.0		
UL/LN/SC-17	16	750	795	2.0		
UL/LN/SC-18	16	900	945	2.0		
UL/LN/SC-19	16	1000	1045	2.0		
UL/LN/SC-20	16	200	245	2.0		

Components Ref.	H	W	W1	Thickness	L	Finish
UL/LN/SC-21	16	250	295	2.0	1500 or 3000	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LN/SC-22	16	300	345	2.0		
UL/LN/SC-23	16	400	445	2.0		
UL/LN/SC-24	16	450	495	2.0		
UL/LN/SC-25	16	500	545	2.0		
UL/LN/SC-26	16	600	645	2.0		
UL/LN/SC-27	16	750	795	2.0		
UL/LN/SC-28	16	900	945	2.0		
UL/LN/SC-29	16	1000	1045	2.0		
UL/LN/SC-30	16	200	245	2.0		
UL/LN/SC-31	16	250	295	2.0		
UL/LN/SC-32	16	300	345	2.0		
UL/LN/SC-33	16	400	445	2.0		
UL/LN/SC-34	16	450	495	2.0		
UL/LN/SC-35	16	500	545	2.0		
UL/LN/SC-36	16	600	645	2.0		
UL/LN/SC-37	16	750	795	2.0		
UL/LN/SC-38	16	800	845	2.0		
UL/LN/SC-39	16	900	945	2.0		
UL/LN/SC-40	16	1000	1045	2.0		

Components Ref.	Description
UL/LZ/CMP	Cable Ladder Cover Clamp

Dimension in Millimetre


Abbreviation: H - Height L - Length W - Width

When ordering Material and Finish as straight cable ladder please also indicate Length.


Steel Cable Ladder

Steel Cable Ladder - Horizontal Splice Plate

Type: UL/LC/HS-6

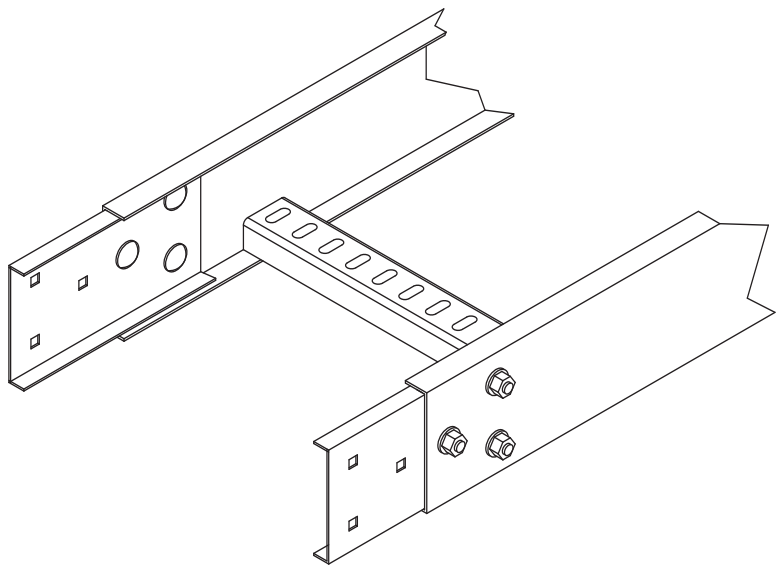

Application

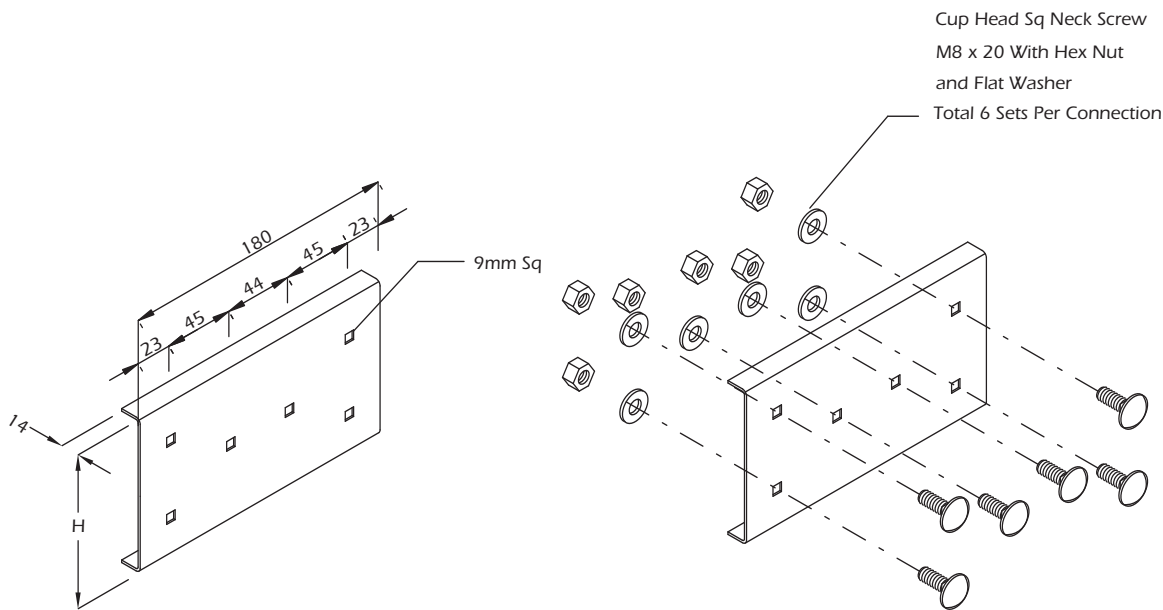

Splice Plate and Fixture

Components Ref.	H	Description	Finish
UL/LC/HS-6-4	100	Horizontal Splice Plate With Fixture	Hot Dip Galvanised
UL/LC/HS-6-5	125	For 100mm - 125mm - 150mm	Epoxy or Polyester Coated
UL/LC/HS-6-6	150	Height Cable Ladder	Stainless


Dimension in Millimetre
Abbreviation: H - Height

Material and Finish as straight cable ladder.


Steel Cable Ladder

Steel Cable Ladder - Horizontal Splice Plate

Type: UL/LN/HS-4

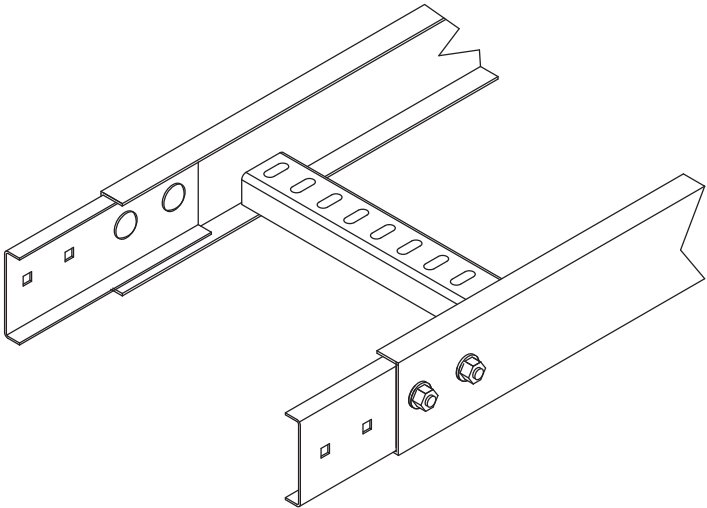

Application

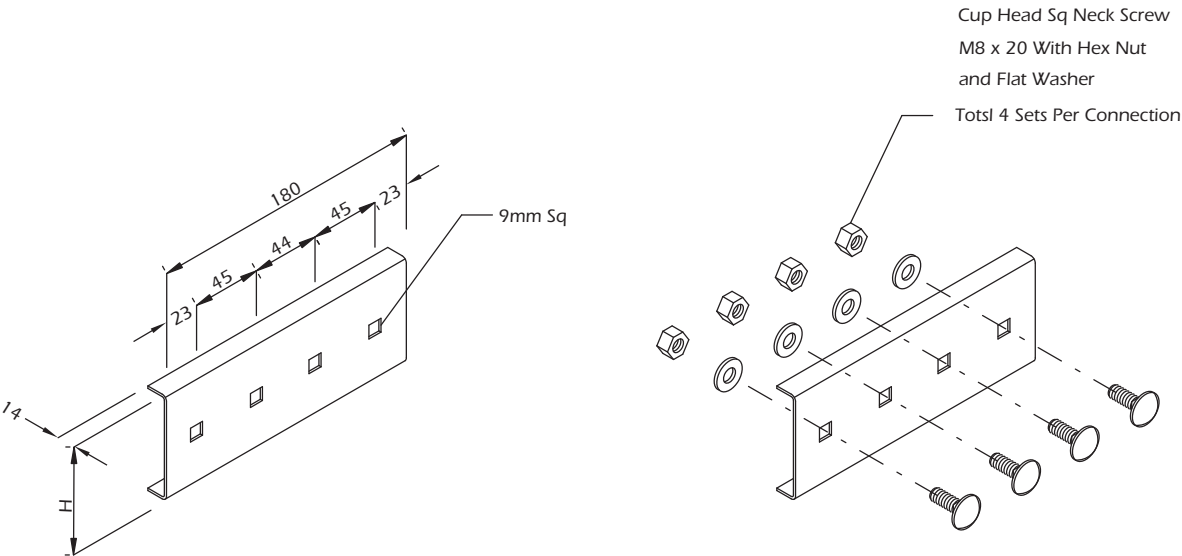

Splice Plate and Fixture

Components Ref.	Cable Ladder Height	H	Finish
UL/LN/HS-4-2	50	To Fit Cable Ladder with 2mm Clearance	Hot Dip Galvanised Epoxy or Polyester Coated Stainless
UL/LN/HS-4-3	75		


Dimension in Millimetre
Abbreviation: H - Height

Material and Finish as straight cable ladder.


Steel Cable Ladder

Steel Cable Ladder - Vertical Adjustable Splice Plate

Type: UL/LN/VAS-6

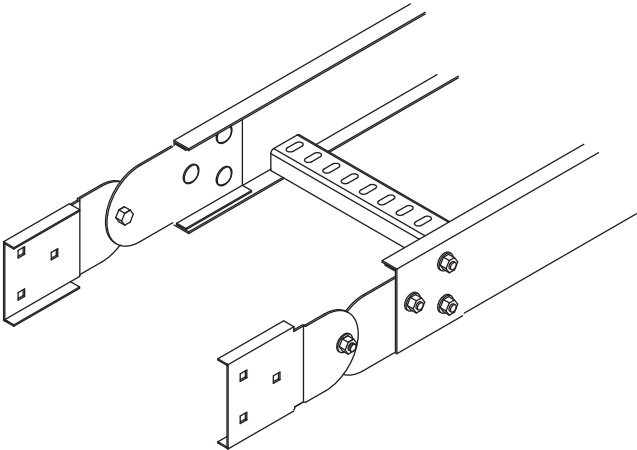

Application

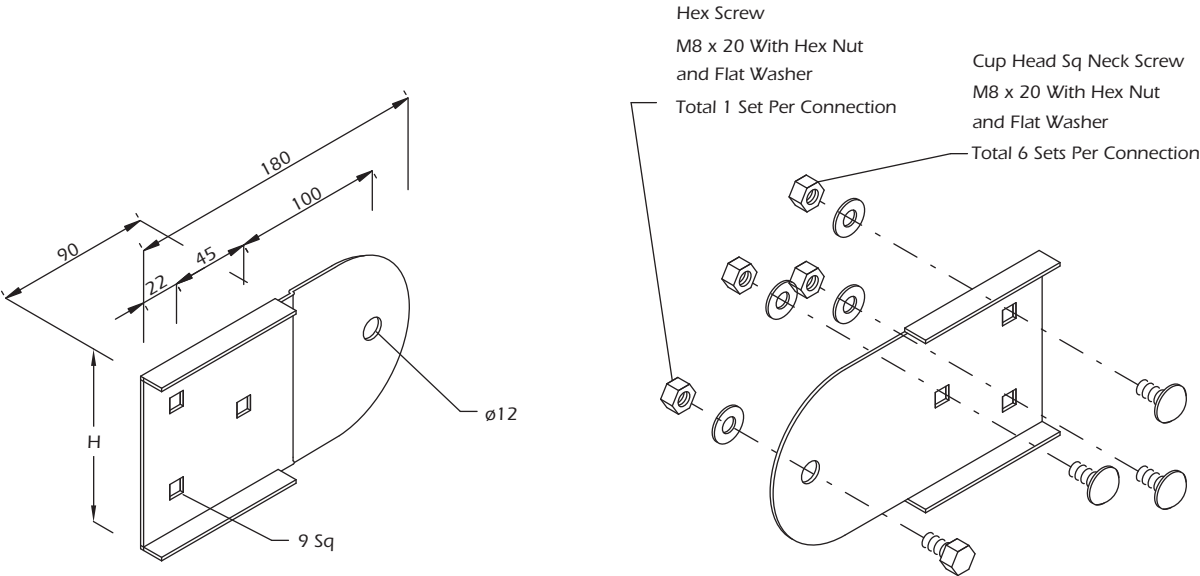

Splice Plate and Fixture

Components Ref.	Cable Ladder Height	H	Finish
UL/LN/VAS-6-4	100	To Fit Cable Ladder with 2mm Clearance	Hot Dip Galvanised Epoxy or Polyester Coated Stainless
UL/LN/VAS-6-5	125		
UL/LN/VAS-6-6	150		


Dimension in Millimetre
Abbreviation: H - Height

Material and Finish as straight cable ladder.


Steel Cable Ladder

Steel Cable Ladder - Vertical Adjustable Splice Plate

Type: UL/LN/VAS-4

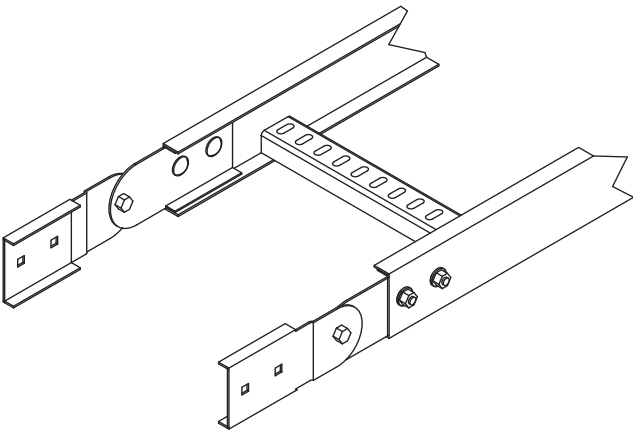

Application

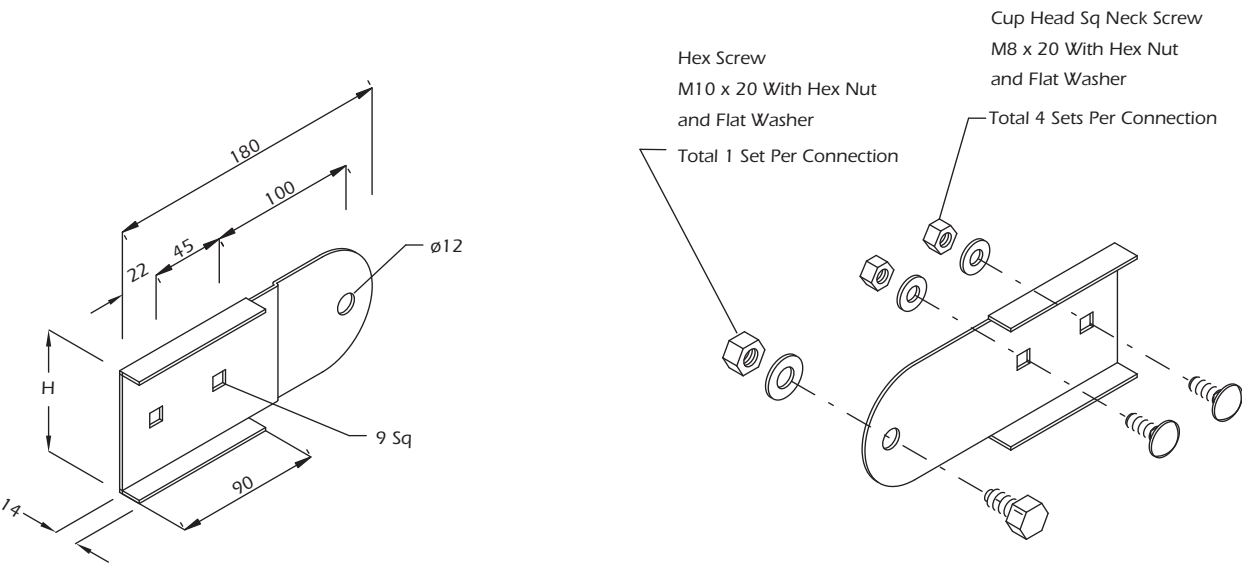

Splice Plate and Fixture

Components Ref.	Cable Ladder Height	H	Finish
UL/LN/VAS-4-2	50	To Fit Cable Ladder with 2mm Clearance	Hot Dip Galvanised Epoxy or Polyester Coated Stainless
UL/LN/VAS-4-3	75		


Dimension in Millimetre
Abbreviation: H - Height

Material and Finish as straight cable ladder.


Steel Cable Ladder

Steel Cable Ladder - Horizontal Adjustable Splice Plate

Type: UL/LN/HAS-6

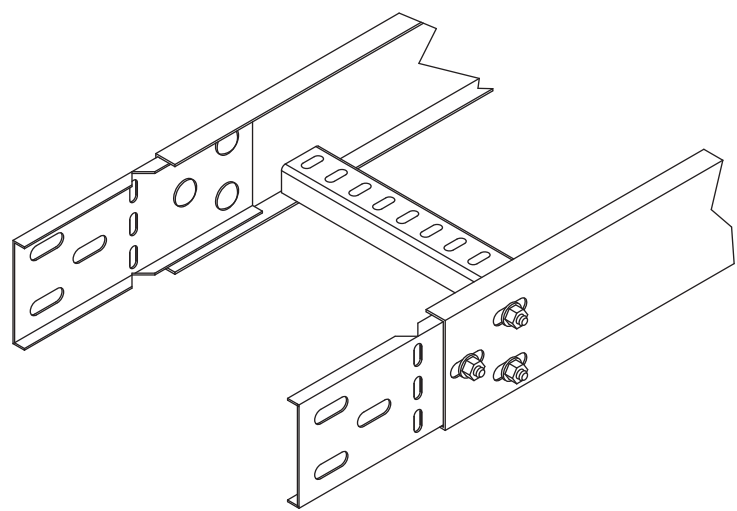

Application

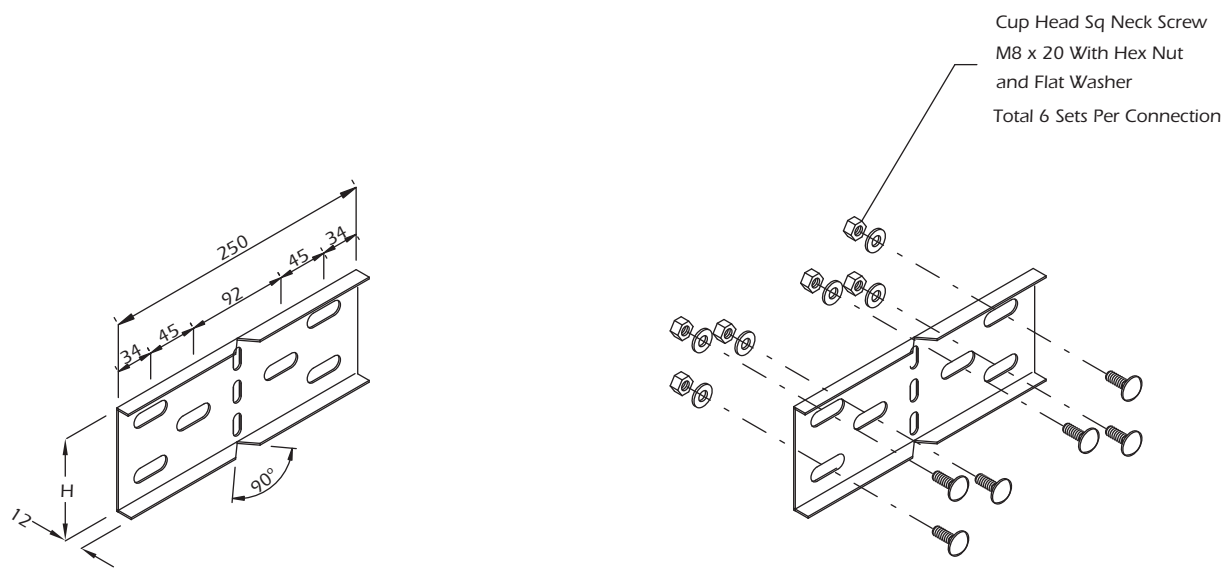

Splice Plate and Fixture

Components Ref.	Cable Ladder Height	H	Finish
UL/LN/HAS-6-4	100	To Fit Cable Ladder with 2mm Clearance	Hot Dip Galvanised Epoxy or Polyester Coated Stainless
UL/LN/HAS-6-5	125		
UL/LN/HAS-6-6	150		


Dimension in Millimetre
Abbreviation: H - Height

Material and Finish as straight cable ladder.



Steel Cable Ladder

Steel Cable Ladder - Horizontal Adjustable Splice Plate

Type: UL/LN/HAS-4

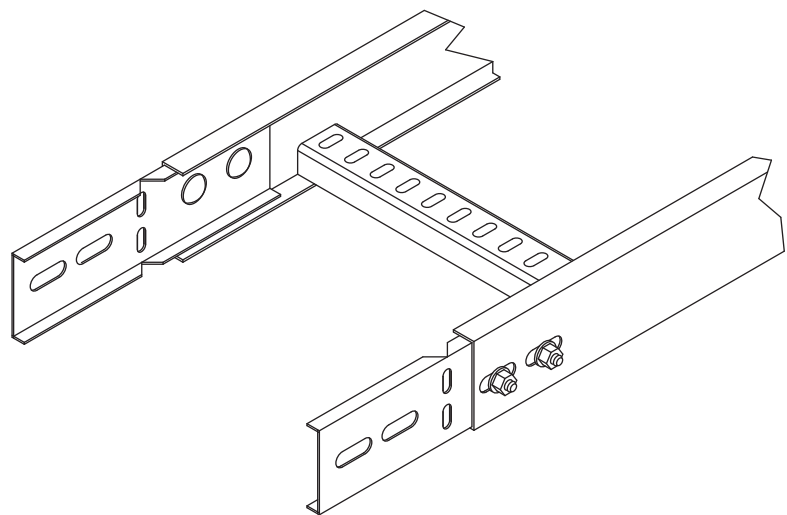

Application

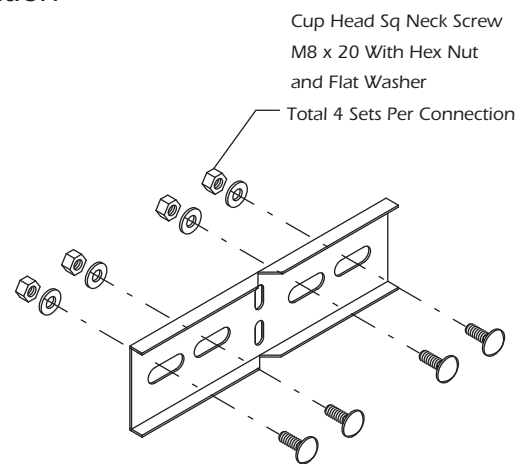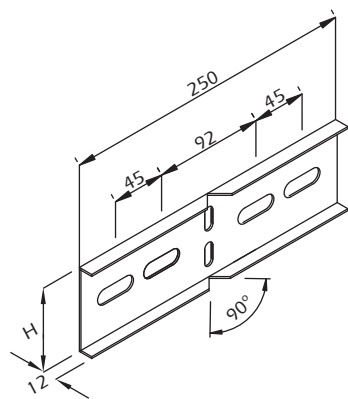

Splice Plate and Fixture

Components Ref.	Cable Ladder Height	H	Finish
UL/LN/HAS-4-2	50	To Fit Cable Ladder with 2mm Clearance	Hot Dip Galvanised Epoxy or Polyester Coated Stainless
UL/LN/HAS-4-3	75		


Dimension in Millimetre
Abbreviation: H - Height

Material and Finish as straight cable ladder.


Steel Cable Ladder

Steel Cable Ladder - End Plate

Type: UL/LN/EP-6

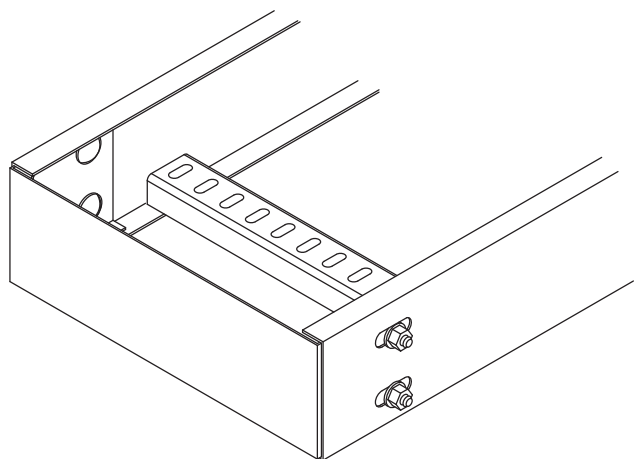

Application

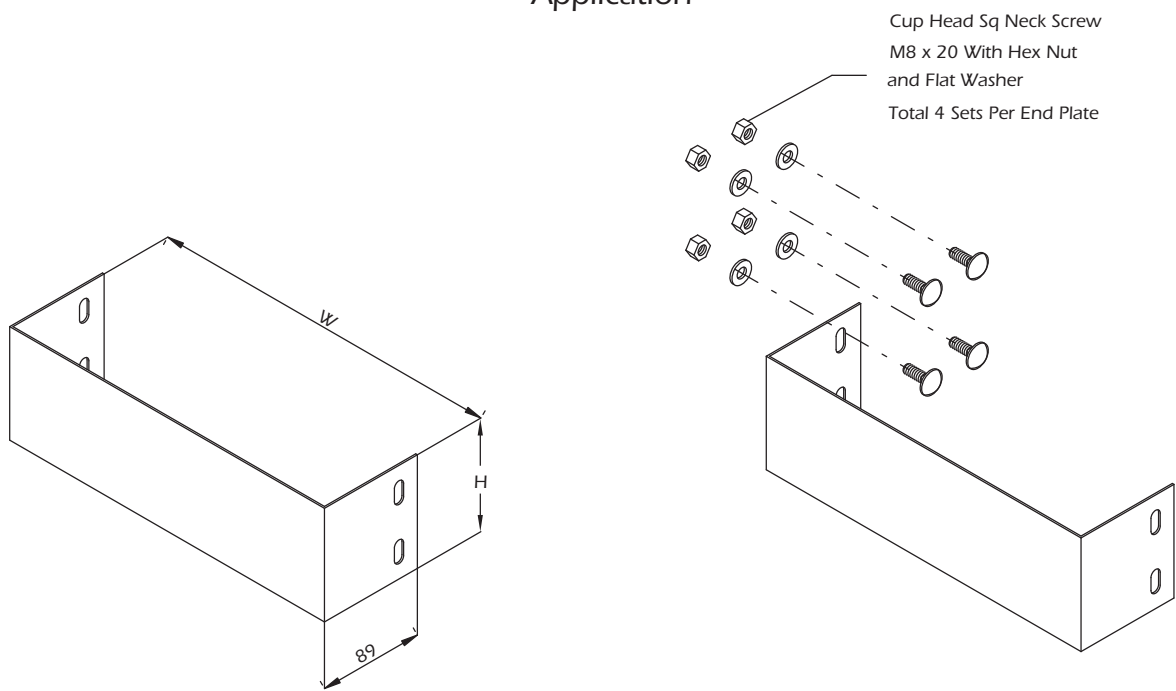

End Plate and Fixture

Components Ref.	Cable Ladder Height	H	Finish
UL/LN/EP-6-4	100	To Fit Cable Ladder with 2mm Clearance	Hot Dip Galvanised Epoxy or Polyester Coated Stainless
UL/LN/EP-6-5	125		
UL/LN/EP-6-6	150		


Dimension in Millimetre
Abbreviation: H - Height

Material and Finish as straight cable ladder.


Steel Cable Ladder

Steel Cable Ladder - End Plate

Type: UL/LN/EP-4

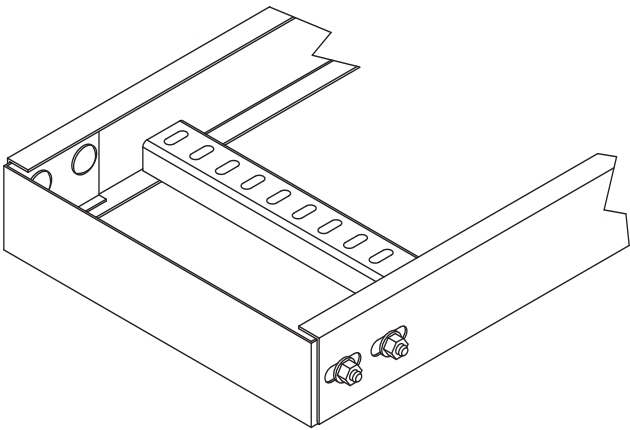

Application

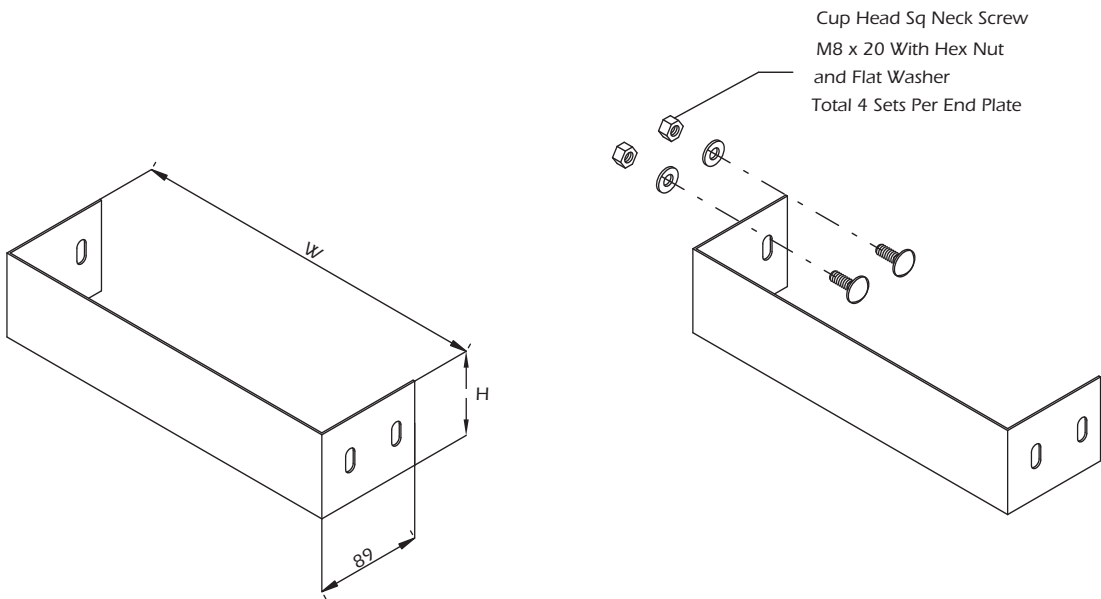

End Plate with Fixture


Components Ref.	Cable Ladder Height	H	Finish
UL/LN/EP-4-2	50	To Fit Cable Ladder with 2mm Clearance	Hot Dip Galvanised Epoxy or Polyester Coated Stainless
UL/LN/EP-4-3	75		

Dimension in Millimetre
Abbreviation: H - Height


Material and Finish as straight cable ladder.

Steel Cable Ladder

Steel Cable Ladder - Hold Down Clamp Type: UL/L-CP

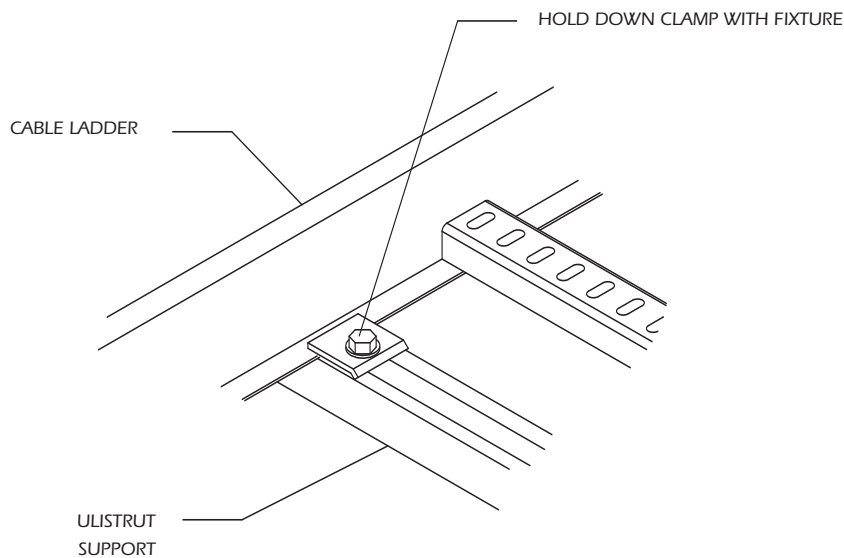

Application

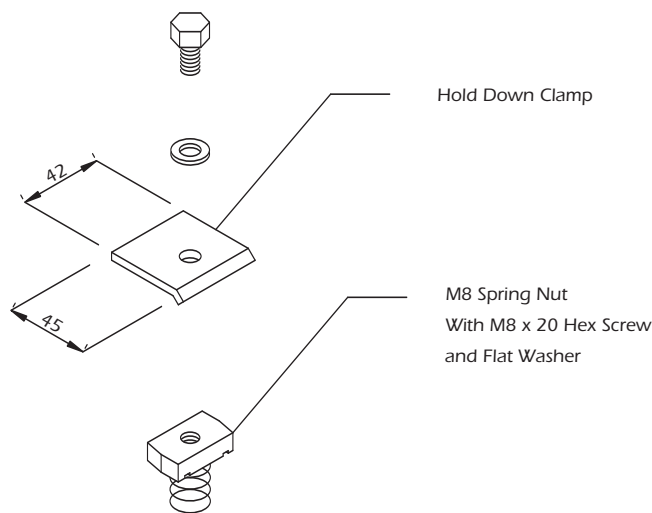

Clamp and Fixture

Components Ref.	Description	Thickness	Finish
UL/L-CP	Hold Down Clamp	4mm	Hot Dip Galvanised Epoxy or Polyester Coated Stainless


Dimension in Millimetre

When ordering please indicate Material and Finish.

Steel Cable Ladder

Steel Cable Ladder - Straight

Type: UL/LG/ST

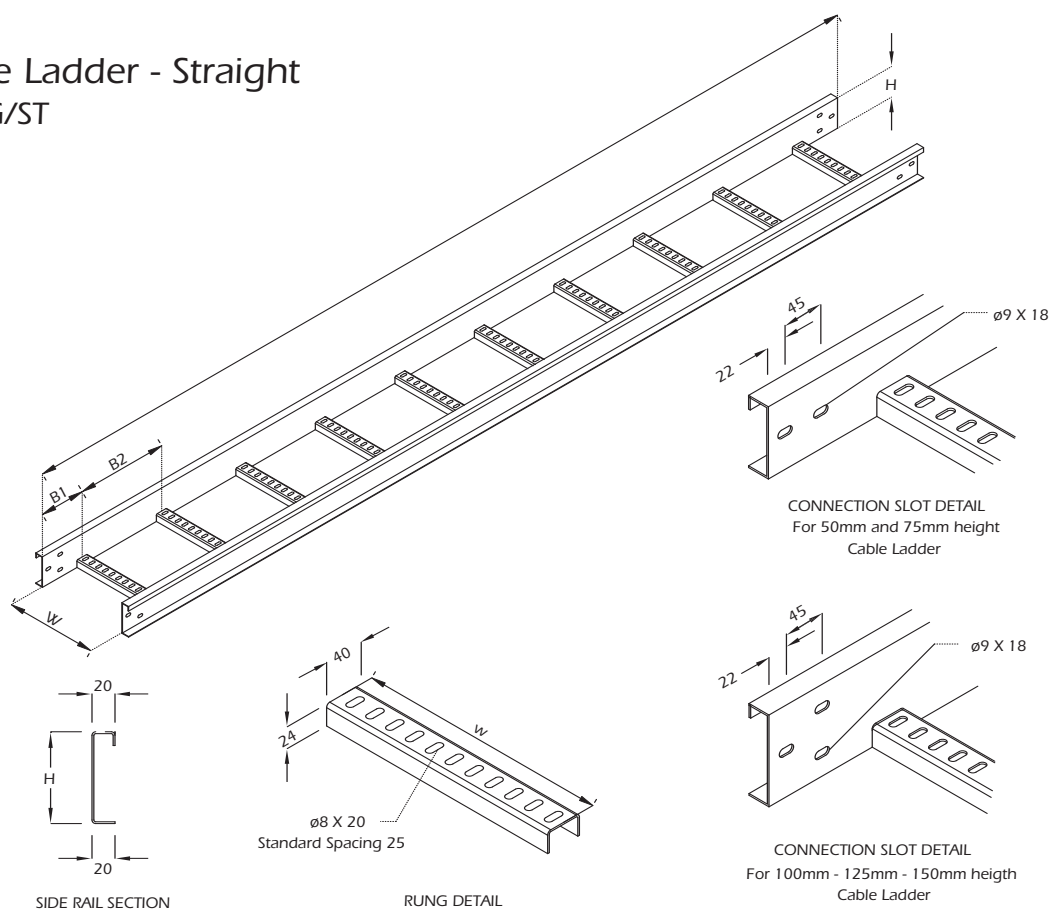

Components Ref.	H	W	B1	B2	L	Thickness	Finish
UL/LG/ST/2-6	50	150	150	300	3000	1.5	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LG/ST/2-8	50	200	150	300	3000	1.5	
UL/LG/ST/2-10	50	250	150	300	3000	1.5	
UL/LG/ST/2-12	50	300	150	300	3000	1.5	
UL/LG/ST/3-6	75	150	150	300	3000	1.5	
UL/LG/ST/3-8	75	200	150	300	3000	1.5	
UL/LG/ST/3-10	75	250	150	300	3000	1.5	
UL/LG/ST/3-12	75	300	150	300	3000	1.5	
UL/LG/ST/4-6	100	150	150	300	3000	2.0	
UL/LG/ST/4-8	100	200	150	300	3000	2.0	
UL/LG/ST/4-10	100	250	150	300	3000	2.0	
UL/LG/ST/4-12	100	300	150	300	3000	2.0	
UL/LG/ST/4-16	100	400	150	300	3000	2.0	
UL/LG/ST/4-18	100	450	150	300	3000	2.0	
UL/LG/ST/4-20	100	500	150	300	3000	2.0	
UL/LG/ST/4-24	100	600	150	300	3000	2.0	
UL/LG/ST/4-30	100	750	150	300	3000	2.0	
UL/LG/ST/4-36	100	900	150	300	3000	2.0	
UL/LG/ST/4-40	100	1000	150	300	3000	2.0	
UL/LG/ST/5-8	125	200	150	300	3000	2.0	

Components Ref.	H	W	B1	B2	L	Thickness	Finish
UL/LG/ST/5-10	125	250	150	300	3000	2.0	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LG/ST/5-12	125	300	150	300	3000	2.0	
UL/LG/ST/5-16	125	400	150	300	3000	2.0	
UL/LG/ST/5-18	125	450	150	300	3000	2.0	
UL/LG/ST/5-20	125	500	150	300	3000	2.0	
UL/LG/ST/5-24	125	600	150	300	3000	2.0	
UL/LG/ST/5-30	125	750	150	300	3000	2.0	
UL/LG/ST/5-36	125	900	150	300	3000	2.0	
UL/LG/ST/5-40	125	1000	150	300	3000	2.0	
UL/LG/ST/6-8	150	200	150	300	3000	2.0	
UL/LG/ST/6-10	150	250	150	300	3000	2.0	
UL/LG/ST/6-12	150	300	150	300	3000	2.0	
UL/LG/ST/6-16	150	400	150	300	3000	2.0	
UL/LG/ST/6-18	150	450	150	300	3000	2.0	
UL/LG/ST/6-20	150	500	150	300	3000	2.0	
UL/LG/ST/6-24	150	600	150	300	3000	2.0	
UL/LG/ST/6-30	150	750	150	300	3000	2.0	
UL/LG/ST/6-32	150	800	150	300	3000	2.0	
UL/LG/ST/6-36	150	900	150	300	3000	2.0	
UL/LG/ST/6-40	150	1000	150	300	3000	2.0	

Dimension in Millimetre

Abbreviation: B - Rung Spacing H - Height L - Length


When ordering please indicate Material and Finish.

We also supply other sizes with the same Side Rail, Rung Profile and various number of Connection Slots.

Steel Cable Ladder

Steel Cable Ladder - 90° Elbow

Type: UL/LG/EL90

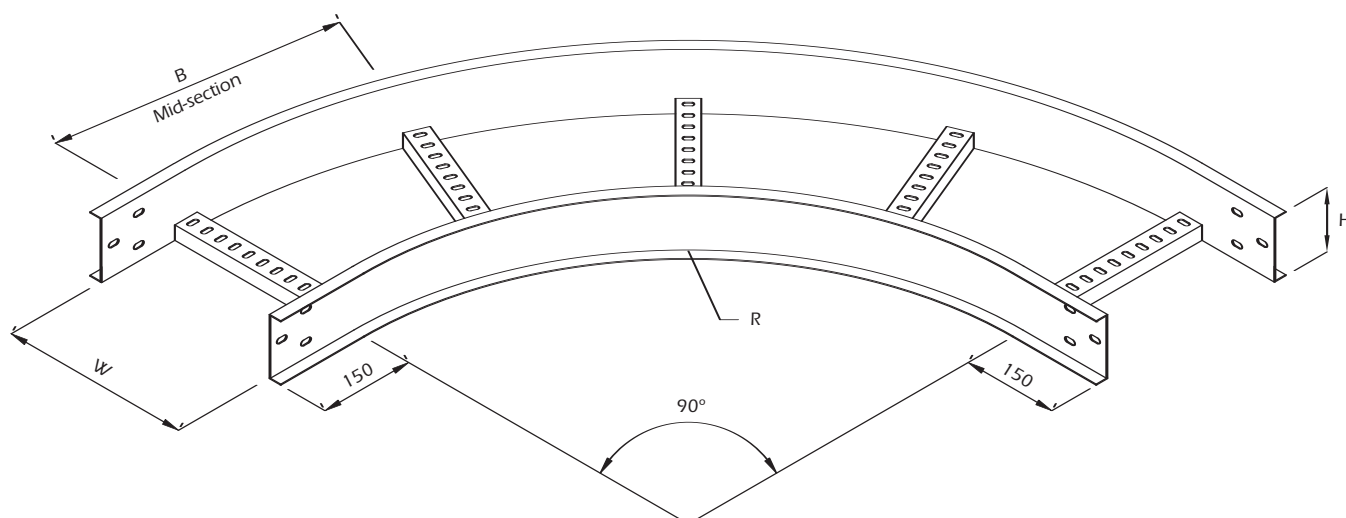

Rung Spacing 300mm

Components Ref.	H	W	Thickness	R (Radii)	Finish
UL/LG/EL90/2-6	50	150	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LG/EL90/2-8	50	200			
UL/LG/EL90/2-10	50	250			
UL/LG/EL90/2-12	50	300			
UL/LG/EL90/3-6	75	150			
UL/LG/EL90/3-8	75	200			
UL/LG/EL90/3-10	75	250			
UL/LG/EL90/3-12	75	300			
UL/LG/EL90/4-6	100	150			
UL/LG/EL90/4-8	100	200			
UL/LG/EL90/4-10	100	250			
UL/LG/EL90/4-12	100	300			
UL/LG/EL90/4-16	100	400			
UL/LG/EL90/4-18	100	450			
UL/LG/EL90/4-20	100	500			
UL/LG/EL90/4-24	100	600			
UL/LG/EL90/4-30	100	750			
UL/LG/EL90/4-36	100	900			
UL/LG/EL90/4-40	100	1000			
UL/LG/EL90/5-8	125	200			

Components Ref.	H	W	Thickness	R (Radii)	Finish
UL/LG/EL90/5-10	125	250	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LG/EL90/5-12	125	300			
UL/LG/EL90/5-16	125	400			
UL/LG/EL90/5-18	125	450			
UL/LG/EL90/5-20	125	500			
UL/LG/EL90/5-24	125	600			
UL/LG/EL90/5-30	125	750			
UL/LG/EL90/5-36	125	900			
UL/LG/EL90/5-40	125	1000			
UL/LG/EL90/6-8	150	200			
UL/LG/EL90/6-10	150	250			
UL/LG/EL90/6-12	150	300			
UL/LG/EL90/6-16	150	400			
UL/LG/EL90/6-18	150	450			
UL/LG/EL90/6-20	150	500			
UL/LG/EL90/6-24	150	600			
UL/LG/EL90/6-30	150	750			
UL/LG/EL90/6-32	150	800			
UL/LG/EL90/6-36	150	900			
UL/LG/EL90/6-40	150	1000			

Dimension in Millimetre


Abbreviation: B - Rung Spacing H - Height R - Radii W - Width

When ordering Material and Finish as straight cable ladder please also indicate Radius.

Steel Cable Ladder

Steel Cable Ladder - 45° Elbow

Type: UL/LG/EL45

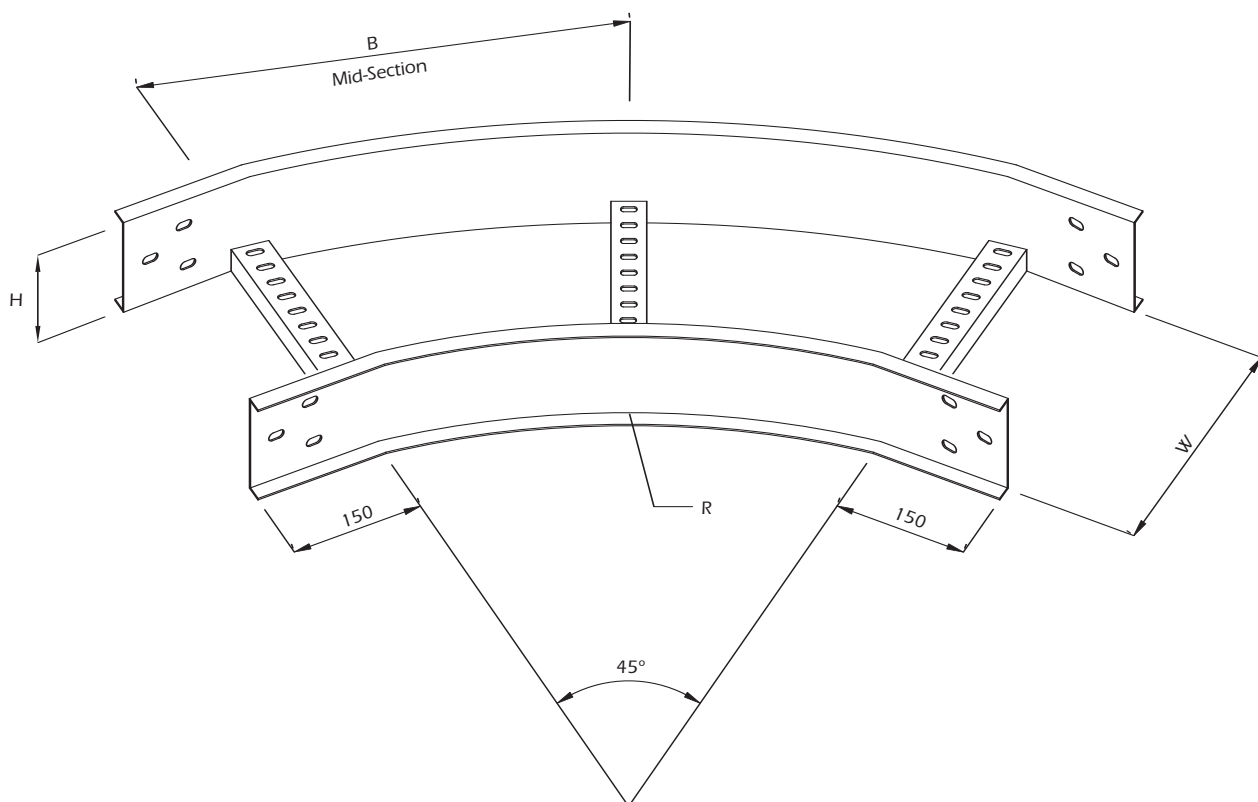

Rung Spacing 300mm

Components Ref.	H	W	Thickness	R (Radii)	Finish
UL/LG/EL45/2-6	50	150	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LG/EL45/2-8	50	200			
UL/LG/EL45/2-10	50	250			
UL/LG/EL45/2-12	50	300			
UL/LG/EL45/3-6	75	150			
UL/LG/EL45/3-8	75	200			
UL/LG/EL45/3-10	75	250			
UL/LG/EL45/3-12	75	300			
UL/LG/EL45/4-6	100	150			
UL/LG/EL45/4-8	100	200			
UL/LG/EL45/4-10	100	250			
UL/LG/EL45/4-12	100	300			
UL/LG/EL45/4-16	100	400			
UL/LG/EL45/4-18	100	450			
UL/LG/EL45/4-20	100	500			
UL/LG/EL45/4-24	100	600			
UL/LG/EL45/4-30	100	750			
UL/LG/EL45/4-36	100	900			
UL/LG/EL45/4-40	100	1000			
UL/LG/EL45/5-8	125	200			

Components Ref.	H	W	Thickness	R (Radii)	Finish
UL/LG/EL45/5-10	125	250	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LG/EL45/5-12	125	300			
UL/LG/EL45/5-16	125	400			
UL/LG/EL45/5-18	125	450			
UL/LG/EL45/5-20	125	500			
UL/LG/EL45/5-24	125	600			
UL/LG/EL45/5-30	125	750			
UL/LG/EL45/5-36	125	900			
UL/LG/EL45/5-40	125	1000			
UL/LG/EL45/6-8	150	200			
UL/LG/EL45/6-10	150	250			
UL/LG/EL45/6-12	150	300			
UL/LG/EL45/6-16	150	400			
UL/LG/EL45/6-18	150	450			
UL/LG/EL45/6-20	150	500			
UL/LG/EL45/6-24	150	600			
UL/LG/EL45/6-30	150	750			
UL/LG/EL45/6-32	150	800			
UL/LG/EL45/6-36	150	900			
UL/LG/EL45/6-40	150	1000			

Dimension in Millimetre


Abbreviation: B - Rung Spacing H - Height R - Radii W - Width

When ordering Material and Finish as straight cable ladder please also indicate Radius.

Steel Cable Ladder

Steel Cable Ladder - Horizontal Equal Tee

Type: UL/LG/ET

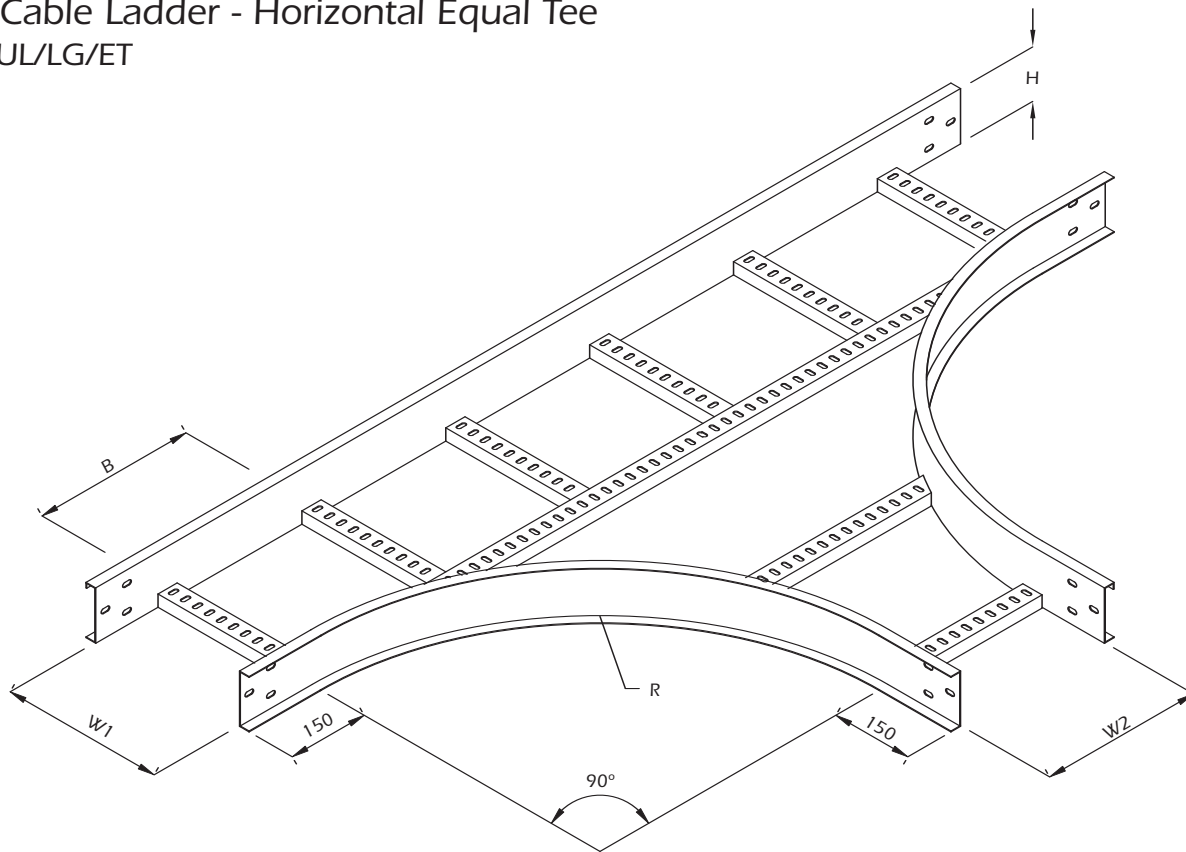

Rung Spacing 300mm

Components Ref.	H	W1	W2	Thickness	R (Radii)	Finish
UL/LG/ET/2-6	50	150	150	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LG/ET/2-8	50	200	200			
UL/LG/ET/2-10	50	250	250			
UL/LG/ET/2-12	50	300	300			
UL/LG/ET/3-6	75	150	150			
UL/LG/ET/3-8	75	200	200			
UL/LG/ET/3-10	75	250	250			
UL/LG/ET/3-12	75	300	300			
UL/LG/ET/4-6	100	150	150			
UL/LG/ET/4-8	100	200	200			
UL/LG/ET/4-10	100	250	250			
UL/LG/ET/4-12	100	300	300			
UL/LG/ET/4-16	100	400	400			
UL/LG/ET/4-18	100	450	450			
UL/LG/ET/4-20	100	500	500			
UL/LG/ET/4-24	100	600	600			
UL/LG/ET/4-30	100	750	750			
UL/LG/ET/4-36	100	900	900			
UL/LG/ET/4-40	100	1000	1000			
UL/LG/ET/5-8	125	200	200			

Components Ref.	H	W1	W2	Thickness	R (Radii)	Finish
UL/LG/ET/5-10	125	250	250	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LG/ET/5-12	125	300	300			
UL/LG/ET/5-16	125	400	400			
UL/LG/ET/5-18	125	450	450			
UL/LG/ET/5-20	125	500	500			
UL/LG/ET/5-24	125	600	600			
UL/LG/ET/5-30	125	750	750			
UL/LG/ET/5-36	125	900	900			
UL/LG/ET/5-40	125	1000	1000			
UL/LG/ET/6-8	150	200	200			
UL/LG/ET/6-10	150	250	250			
UL/LG/ET/6-12	150	300	300			
UL/LG/ET/6-16	150	400	400			
UL/LG/ET/6-18	150	450	450			
UL/LG/ET/6-20	150	500	500			
UL/LG/ET/6-24	150	600	600			
UL/LG/ET/6-30	150	750	750			
UL/LG/ET/6-32	150	800	800			
UL/LG/ET/6-36	150	900	900			
UL/LG/ET/6-40	150	1000	1000			

Dimension in Millimetre


Abbreviation: B - Rung Spacing H - Height R - Radii W - Width

When ordering Material and Finish as straight cable ladder please also indicate Radius.

Steel Cable Ladder

Steel Cable Ladder - Unequal Tee

Type: UL/LG/UT

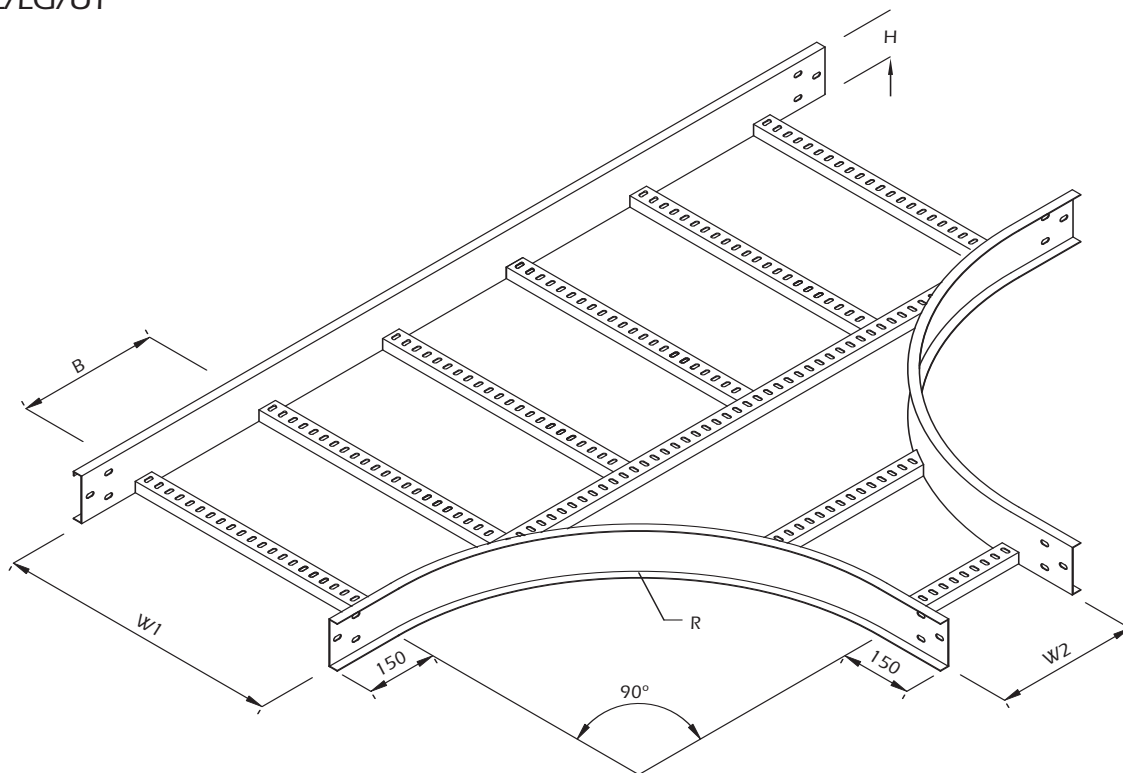

Rung Spacing 300mm

Components Ref.	H	W1	W2	Thickness	R (Radii)	Finish
UL/LG/UT/2-6	50	150	200 to 1000	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LG/UT/2-8	50	200				
UL/LG/UT/2-10	50	250				
UL/LG/UT/2-12	50	300				
UL/LG/UT/3-6	75	150				
UL/LG/UT/3-8	75	200				
UL/LG/UT/3-10	75	250				
UL/LG/UT/3-12	75	300				
UL/LG/UT/4-6	100	150				
UL/LG/UT/4-8	100	200				
UL/LG/UT/4-10	100	250				
UL/LG/UT/4-12	100	300				
UL/LG/UT/4-16	100	400				
UL/LG/UT/4-18	100	450				
UL/LG/UT/4-20	100	500				
UL/LG/UT/4-24	100	600				
UL/LG/UT/4-30	100	750				
UL/LG/UT/4-36	100	900				
UL/LG/UT/4-40	100	1000				
UL/LG/UT/5-8	125	200				

Components Ref.	H	W1	W2	Thickness	R (Radii)	Finish
UL/LG/UT/5-10	125	250	200 to 1000	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LG/UT/5-12	125	300				
UL/LG/UT/5-16	125	400				
UL/LG/UT/5-18	125	450				
UL/LG/UT/5-20	125	500				
UL/LG/UT/5-24	125	600				
UL/LG/UT/5-30	125	750				
UL/LG/UT/5-36	125	900				
UL/LG/UT/5-40	125	1000				
UL/LG/UT/6-8	150	200				
UL/LG/UT/6-10	150	250				
UL/LG/UT/6-12	150	300				
UL/LG/UT/6-16	150	400				
UL/LG/UT/6-18	150	450				
UL/LG/UT/6-20	150	500				
UL/LG/UT/6-24	150	600				
UL/LG/UT/6-30	150	750				
UL/LG/UT/6-32	150	800				
UL/LG/UT/6-36	150	900				
UL/LG/UT/6-40	150	1000				

Dimension in Millimetre


Abbreviation: B - Rung Spacing H - Height R - Radii W - Width

When ordering Material and Finish as straight cable ladder please also indicate Radius and Width (W2).

Steel Cable Ladder

Steel Cable Ladder - Equal Crosses

Type: UL/LG/EC

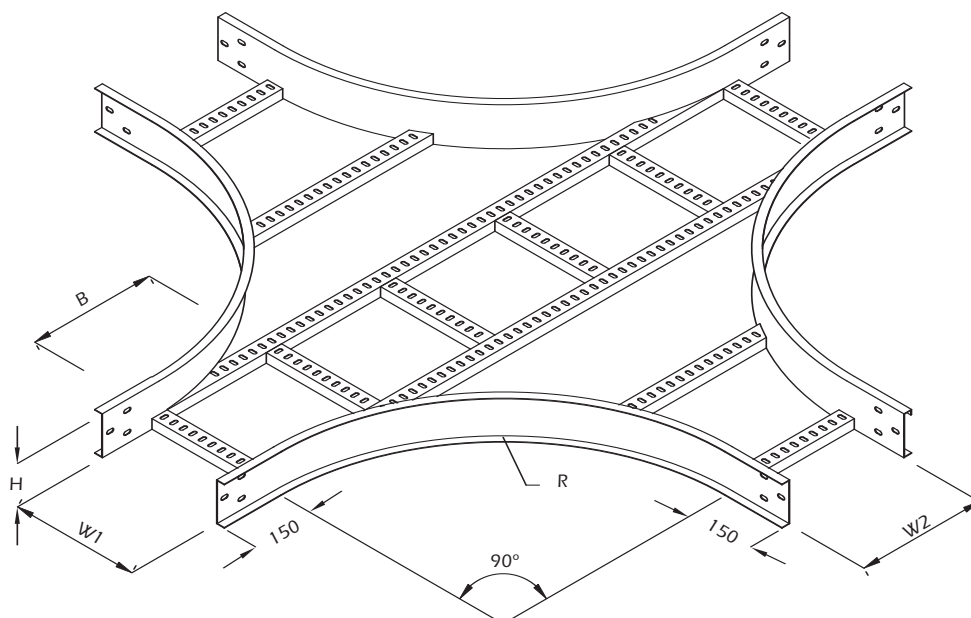

Rung Spacing 300mm

Components Ref.	H	W1	W2	Thickness	R (Radii)	Finish
UL/LG/EC/2-6	50	150	150	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LG/EC/2-8	50	200	200			
UL/LG/EC/2-10	50	250	250			
UL/LG/EC/2-12	50	300	300			
UL/LG/EC/3-6	75	150	150			
UL/LG/EC/3-8	75	200	200			
UL/LG/EC/3-10	75	250	250			
UL/LG/EC/3-12	75	300	300			
UL/LG/EC/4-6	100	150	150			
UL/LG/EC/4-8	100	200	200			
UL/LG/EC/4-10	100	250	250			
UL/LG/EC/4-12	100	300	300			
UL/LG/EC/4-16	100	400	400			
UL/LG/EC/4-18	100	450	450			
UL/LG/EC/4-20	100	500	500			
UL/LG/EC/4-24	100	600	600			
UL/LG/EC/4-30	100	750	750			
UL/LG/EC/4-36	100	900	900			
UL/LG/EC/4-40	100	1000	1000			
UL/LG/EC/5-8	125	200	200			

Components Ref.	H	W1	W2	Thickness	R (Radii)	Finish
UL/LG/EC/5-10	125	250	250	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LG/EC/5-12	125	300	300			
UL/LG/EC/5-16	125	400	400			
UL/LG/EC/5-18	125	450	450			
UL/LG/EC/5-20	125	500	500			
UL/LG/EC/5-24	125	600	600			
UL/LG/EC/5-30	125	750	750			
UL/LG/EC/5-36	125	900	900			
UL/LG/EC/5-40	125	1000	1000			
UL/LG/EC/6-8	150	200	200			
UL/LG/EC/6-10	150	250	250			
UL/LG/EC/6-12	150	300	300			
UL/LG/EC/6-16	150	400	400			
UL/LG/EC/6-18	150	450	450			
UL/LG/EC/6-20	150	500	500			
UL/LG/EC/6-24	150	600	600			
UL/LG/EC/6-30	150	750	750			
UL/LG/EC/6-32	150	800	800			
UL/LG/EC/6-36	150	900	900			
UL/LG/EC/6-40	150	1000	1000			

Dimension in Millimetre


Abbreviation: B - Rung Spacing H - Height R - Radii W - Width

When ordering Material and Finish as straight cable ladder please also indicate Radius.

Steel Cable Ladder

Steel Cable Ladder - Unequal Crosses

Type: UL/LG/UC

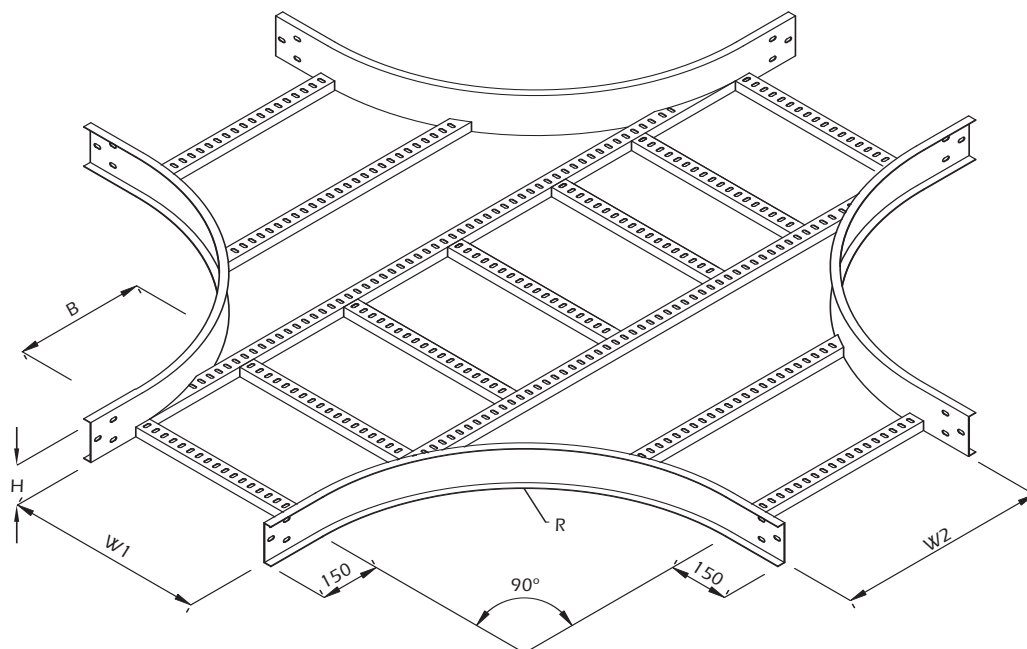

Rung Spacing 300mm

Components Ref.	H	W1	W2	Thickness	R (Radii)	Finish
UL/LG/UC/2-6	50	150	200 to 1000	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LG/UC/2-8	50	200				
UL/LG/UC/2-10	50	250				
UL/LG/UC/2-12	50	300				
UL/LG/UC/3-6	75	150				
UL/LG/UC/3-8	75	200				
UL/LG/UC/3-10	75	250				
UL/LG/UC/3-12	75	300				
UL/LG/UC/4-6	100	150				
UL/LG/UC/4-8	100	200				
UL/LG/UC/4-10	100	250				
UL/LG/UC/4-12	100	300				
UL/LG/UC/4-16	100	400				
UL/LG/UC/4-18	100	450				
UL/LG/UC/4-20	100	500				
UL/LG/UC/4-24	100	600				
UL/LG/UC/4-30	100	750				
UL/LG/UC/4-36	100	900				
UL/LG/UC/4-40	100	1000				
UL/LG/UC/5-8	125	200				

Components Ref.	H	W1	W2	Thickness	R (Radii)	Finish
UL/LG/UC/5-10	125	250	200 to 1000	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LG/UC/5-12	125	300				
UL/LG/UC/5-16	125	400				
UL/LG/UC/5-18	125	450				
UL/LG/UC/5-20	125	500				
UL/LG/UC/5-24	125	600				
UL/LG/UC/5-30	125	750				
UL/LG/UC/5-36	125	900				
UL/LG/UC/5-40	125	1000				
UL/LG/UC/6-8	150	200				
UL/LG/UC/6-10	150	250				
UL/LG/UC/6-12	150	300				
UL/LG/UC/6-16	150	400				
UL/LG/UC/6-18	150	450				
UL/LG/UC/6-20	150	500				
UL/LG/UC/6-24	150	600				
UL/LG/UC/6-30	150	750				
UL/LG/UC/6-32	150	800				
UL/LG/UC/6-36	150	900				
UL/LG/UC/6-40	150	1000				

Dimension in Millimetre


Abbreviation: B - Rung Spacing H - Height R - Radii W - Width

When ordering Material and Finish as straight cable ladder please also indicate Radius and Width (W2).

Steel Cable Ladder

Steel Cable Ladder - External Riser

Type: UL/LG/ER

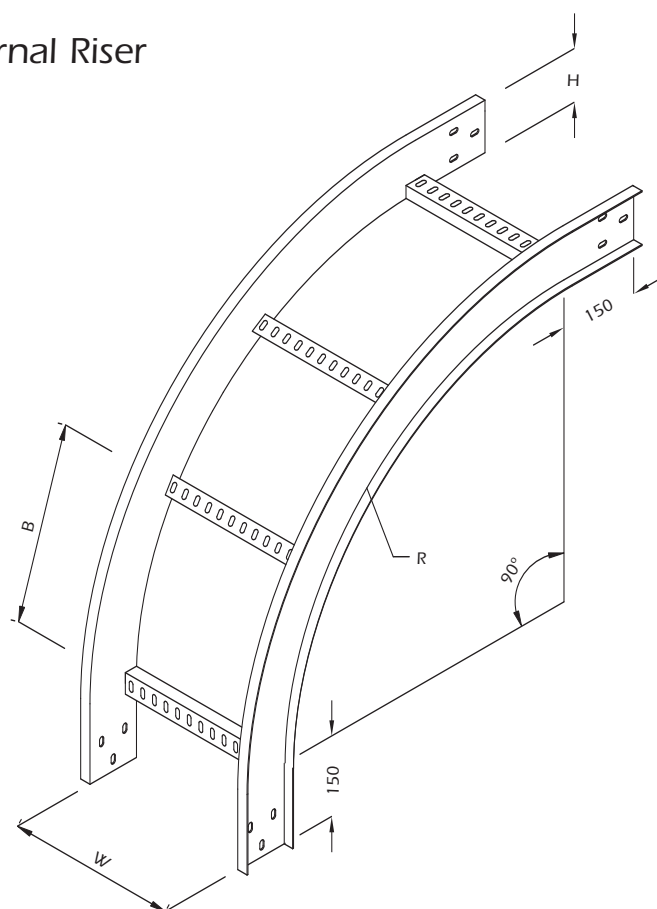

Rung Spacing 300mm

Components Ref.	H	W	Thickness	R (Radii)	Finish
UL/LG/ER/2-6	50	150	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LG/ER/2-8	50	200			
UL/LG/ER/2-10	50	250			
UL/LG/ER/2-12	50	300			
UL/LG/ER/3-6	75	150			
UL/LG/ER/3-8	75	200			
UL/LG/ER/3-10	75	250			
UL/LG/ER/3-12	75	300			
UL/LG/ER/4-6	100	150			
UL/LG/ER/4-8	100	200			
UL/LG/ER/4-10	100	250			
UL/LG/ER/4-12	100	300			
UL/LG/ER/4-16	100	400			
UL/LG/ER/4-18	100	450			
UL/LG/ER/4-20	100	500			
UL/LG/ER/4-24	100	600			
UL/LG/ER/4-30	100	750			
UL/LG/ER/4-36	100	900			
UL/LG/ER/4-40	100	1000			
UL/LG/ER/5-8	125	200			

Components Ref.	H	W	Thickness	R (Radii)	Finish
UL/LG/ER/5-10	125	250	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LG/ER/5-12	125	300			
UL/LG/ER/5-16	125	400			
UL/LG/ER/5-18	125	450			
UL/LG/ER/5-20	125	500			
UL/LG/ER/5-24	125	600			
UL/LG/ER/5-30	125	750			
UL/LG/ER/5-36	125	900			
UL/LG/ER/5-40	125	1000			
UL/LG/ER/6-8	150	200			
UL/LG/ER/6-10	150	250			
UL/LG/ER/6-12	150	300			
UL/LG/ER/6-16	150	400			
UL/LG/ER/6-18	150	450			
UL/LG/ER/6-20	150	500			
UL/LG/ER/6-24	150	600			
UL/LG/ER/6-30	150	750			
UL/LG/ER/6-32	150	800			
UL/LG/ER/6-36	150	900			
UL/LG/ER/6-40	150	1000			

Dimension in Millimetre


Abbreviation: B - Rung Spacing H - Height R - Radii W - Width

When ordering Material and Finish as straight cable ladder please also indicate Radius.

Steel Cable Ladder

Steel Cable Ladder - Internal Riser

Type: UL/LG/IR

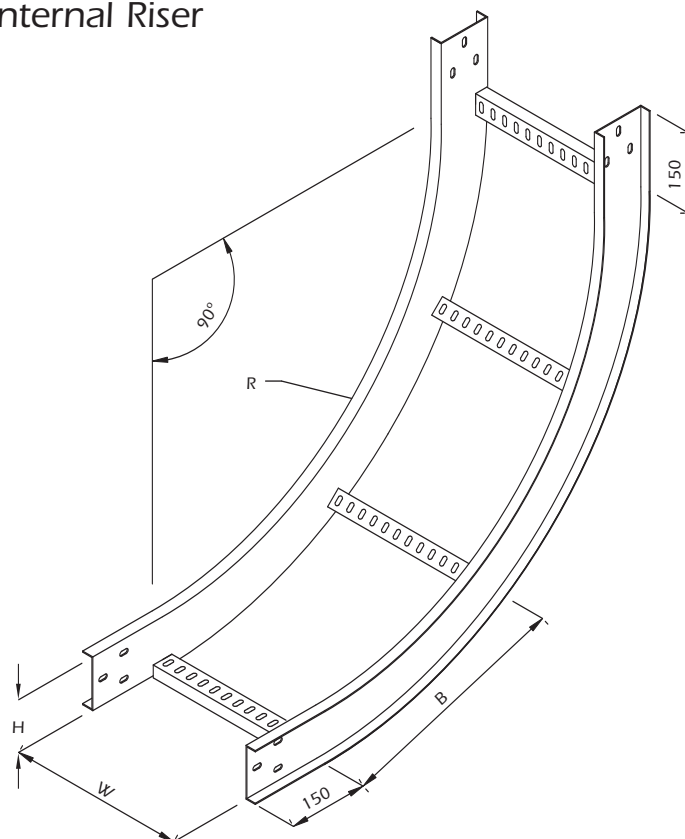

Rung Spacing 300mm

Components Ref.	H	W	Thickness	R (Radii)	Finish
UL/LG/IR/2-6	50	150	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LG/IR/2-8	50	200			
UL/LG/IR/2-10	50	250			
UL/LG/IR/2-12	50	300			
UL/LG/IR/3-6	75	150			
UL/LG/IR/3-8	75	200			
UL/LG/IR/3-10	75	250			
UL/LG/IR/3-12	75	300			
UL/LG/IR/4-6	100	150			
UL/LG/IR/4-8	100	200			
UL/LG/IR/4-10	100	250			
UL/LG/IR/4-12	100	300			
UL/LG/IR/4-16	100	400			
UL/LG/IR/4-18	100	450			
UL/LG/IR/4-20	100	500			
UL/LG/IR/4-24	100	600			
UL/LG/IR/4-30	100	750			
UL/LG/IR/4-36	100	900			
UL/LG/IR/4-40	100	1000			
UL/LG/IR/5-8	125	200			

Components Ref.	H	W	Thickness	R (Radii)	Finish
UL/LG/IR/5-10	125	250	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LG/IR/5-12	125	300			
UL/LG/IR/5-16	125	400			
UL/LG/IR/5-18	125	450			
UL/LG/IR/5-20	125	500			
UL/LG/IR/5-24	125	600			
UL/LG/IR/5-30	125	750			
UL/LG/IR/5-36	125	900			
UL/LG/IR/5-40	125	1000			
UL/LG/IR/6-8	150	200			
UL/LG/IR/6-10	150	250			
UL/LG/IR/6-12	150	300			
UL/LG/IR/6-16	150	400			
UL/LG/IR/6-18	150	450			
UL/LG/IR/6-20	150	500			
UL/LG/IR/6-24	150	600			
UL/LG/IR/6-30	150	750			
UL/LG/IR/6-32	150	800			
UL/LG/IR/6-36	150	900			
UL/LG/IR/6-40	150	1000			

Dimension in Millimetre


Abbreviation: B - Rung Spacing H - Height R - Radii W - Width

When ordering Material and Finish as straight cable ladder please also indicate Radius.

Steel Cable Ladder

Steel Cable Ladder - 90° Vertical Tee

Type: UL/LG/VT90

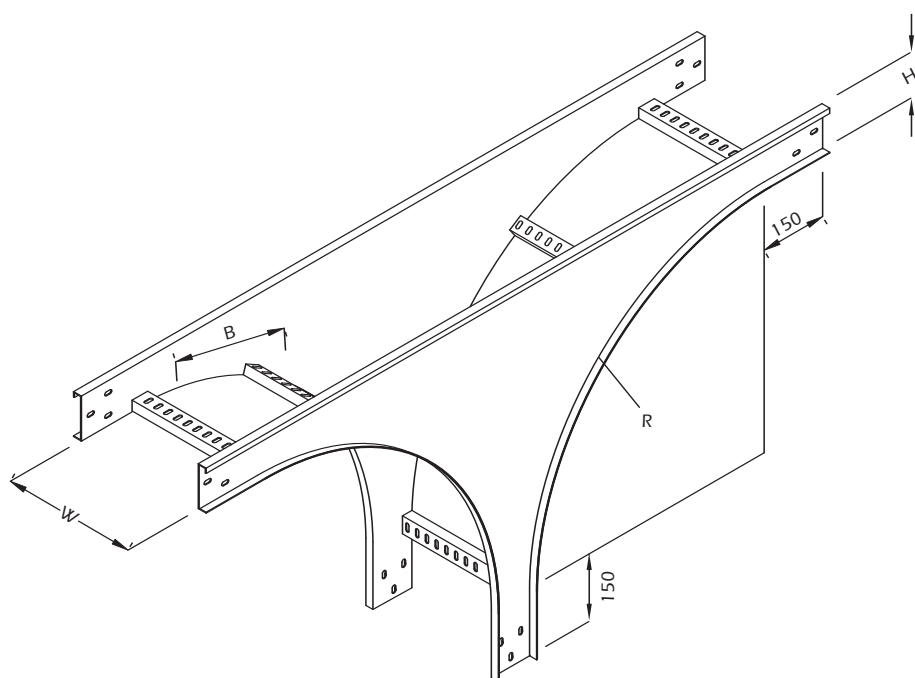

Rung Spacing 300mm

Components Ref.	H	W	Thickness	R (Radii)	Finish
UL/LG/VT90/2-6	50	150	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LG/VT90/2-8	50	200			
UL/LG/VT90/2-10	50	250			
UL/LG/VT90/2-12	50	300			
UL/LG/VT90/3-6	75	150			
UL/LG/VT90/3-8	75	200			
UL/LG/VT90/3-10	75	250			
UL/LG/VT90/3-12	75	300			
UL/LG/VT90/4-6	100	150			
UL/LG/VT90/4-8	100	200			
UL/LG/VT90/4-10	100	250			
UL/LG/VT90/4-12	100	300			
UL/LG/VT90/4-16	100	400			
UL/LG/VT90/4-18	100	450			
UL/LG/VT90/4-20	100	500			
UL/LG/VT90/4-24	100	600			
UL/LG/VT90/4-30	100	750			
UL/LG/VT90/4-36	100	900			
UL/LG/VT90/4-40	100	1000			
UL/LG/VT90/5-8	125	200			

Components Ref.	H	W	Thickness	R (Radii)	Finish
UL/LG/VT90/5-10	125	250	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LG/VT90/5-12	125	300			
UL/LG/VT90/5-16	125	400			
UL/LG/VT90/5-18	125	450			
UL/LG/VT90/5-20	125	500			
UL/LG/VT90/5-24	125	600			
UL/LG/VT90/5-30	125	750			
UL/LG/VT90/5-36	125	900			
UL/LG/VT90/5-40	125	1000			
UL/LG/VT90/6-8	150	200			
UL/LG/VT90/6-10	150	250			
UL/LG/VT90/6-12	150	300			
UL/LG/VT90/6-16	150	400			
UL/LG/VT90/6-18	150	450			
UL/LG/VT90/6-20	150	500			
UL/LG/VT90/6-24	150	600			
UL/LG/VT90/6-30	150	750			
UL/LG/VT90/6-32	150	800			
UL/LG/VT90/6-36	150	900			
UL/LG/VT90/6-40	150	1000			

Dimension in Millimetre


Abbreviation: B - Rung Spacing H - Height R - Radii W - Width

When ordering Material and Finish as straight cable ladder please also indicate Radius.

Steel Cable Ladder

Steel Cable Ladder - Left Offset Reducer

Type: UL/LG/LR

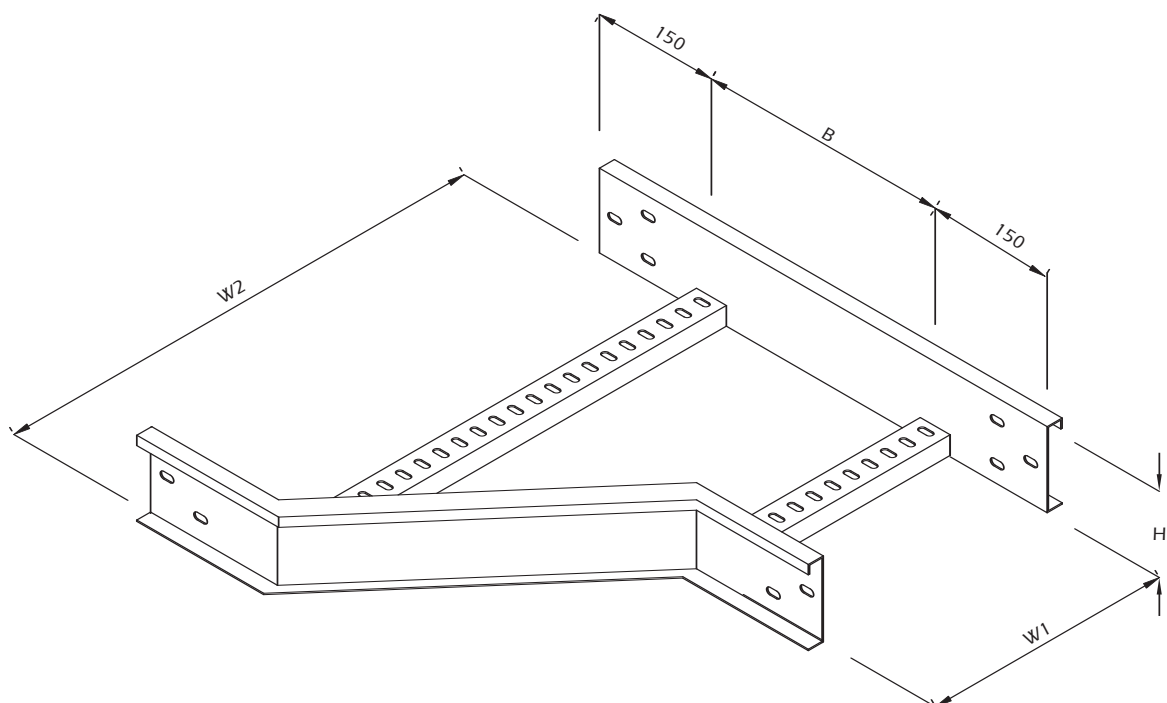

Rung Spacing 300mm

Components Ref.	H	W1	W2	Thickness	Finish
UL/LG/LR/2-6	50	150	200 to 1000	As Straight Cable Ladder	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LG/LR/2-8	50	200			
UL/LG/LR/2-10	50	250			
UL/LG/LR/2-12	50	300			
UL/LG/LR/3-6	75	150			
UL/LG/LR/3-8	75	200			
UL/LG/LR/3-10	75	250			
UL/LG/LR/3-12	75	300			
UL/LG/LR/4-6	100	150			
UL/LG/LR/4-8	100	200			
UL/LG/LR/4-10	100	250			
UL/LG/LR/4-12	100	300			
UL/LG/LR/4-16	100	400			
UL/LG/LR/4-18	100	450			
UL/LG/LR/4-20	100	500			
UL/LG/LR/4-24	100	600			
UL/LG/LR/4-30	100	750			
UL/LG/LR/4-36	100	900			
UL/LG/LR/4-40	100	1000			
UL/LG/LR/5-8	125	200			

Components Ref.	H	W1	W2	Thickness	Finish
UL/LG/LR/5-10	125	250	200 to 1000	As Straight Cable Ladder	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LG/LR/5-12	125	300			
UL/LG/LR/5-16	125	400			
UL/LG/LR/5-18	125	450			
UL/LG/LR/5-20	125	500			
UL/LG/LR/5-24	125	600			
UL/LG/LR/5-30	125	750			
UL/LG/LR/5-36	125	900			
UL/LG/LR/5-40	125	1000			
UL/LG/LR/6-8	150	200			
UL/LG/LR/6-10	150	250			
UL/LG/LR/6-12	150	300			
UL/LG/LR/6-16	150	400			
UL/LG/LR/6-18	150	450			
UL/LG/LR/6-20	150	500			
UL/LG/LR/6-24	150	600			
UL/LG/LR/6-30	150	750			
UL/LG/LR/6-32	150	800			
UL/LG/LR/6-36	150	900			
UL/LG/LR/6-40	150	1000			

Dimension in Millimetre


Abbreviation: B - Rung Spacing H - Height W - Width

When ordering Material and Finish as straight cable ladder please also indicate Width (W2).

Steel Cable Ladder

Steel Cable Ladder - Right Offset Reducer

Type: UL/LG/RR

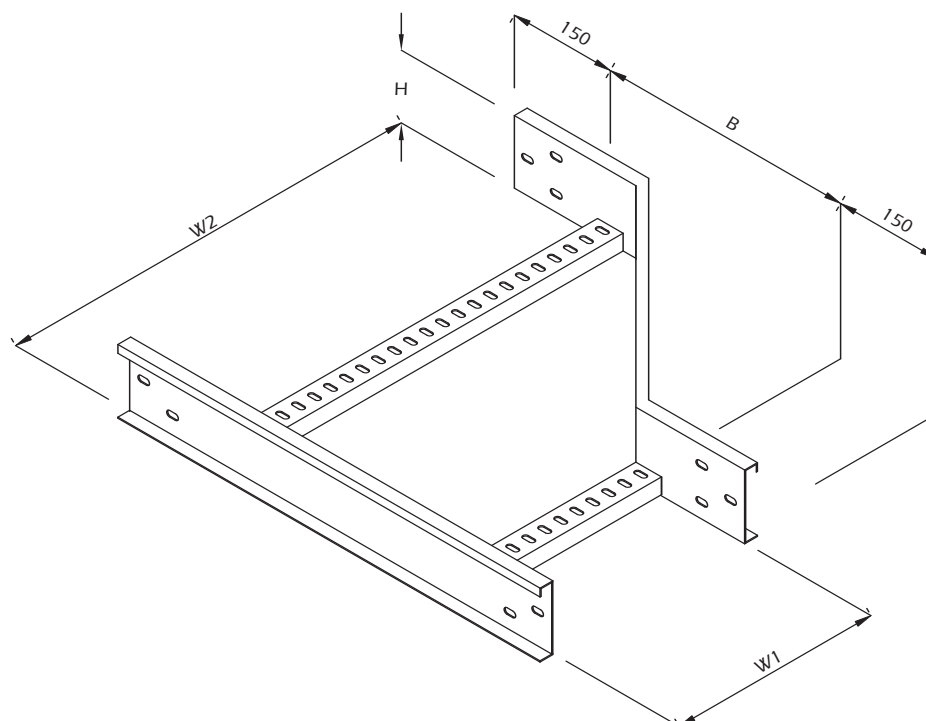

Rung Spacing 300mm

Components Ref.	H	W1	W2	Thickness	Finish
UL/LG/RR/2-6	50	150	200 to 1000	As Straight Cable Ladder	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LG/RR/2-8	50	200			
UL/LG/RR/2-10	50	250			
UL/LG/RR/2-12	50	300			
UL/LG/RR/3-6	75	150			
UL/LG/RR/3-8	75	200			
UL/LG/RR/3-10	75	250			
UL/LG/RR/3-12	75	300			
UL/LG/RR/4-6	100	150			
UL/LG/RR/4-8	100	200			
UL/LG/RR/4-10	100	250			
UL/LG/RR/4-12	100	300			
UL/LG/RR/4-16	100	400			
UL/LG/RR/4-18	100	450			
UL/LG/RR/4-20	100	500			
UL/LG/RR/4-24	100	600			
UL/LG/RR/4-30	100	750			
UL/LG/RR/4-36	100	900			
UL/LG/RR/4-40	100	1000			
UL/LG/RR/5-8	125	200			

Components Ref.	H	W1	W2	Thickness	Finish
UL/LG/RR/5-10	125	250	200 to 1000	As Straight Cable Ladder	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LG/RR/5-12	125	300			
UL/LG/RR/5-16	125	400			
UL/LG/RR/5-18	125	450			
UL/LG/RR/5-20	125	500			
UL/LG/RR/5-24	125	600			
UL/LG/RR/5-30	125	750			
UL/LG/RR/5-36	125	900			
UL/LG/RR/5-40	125	1000			
UL/LG/RR/6-8	150	200			
UL/LG/RR/6-10	150	250			
UL/LG/RR/6-12	150	300			
UL/LG/RR/6-16	150	400			
UL/LG/RR/6-18	150	450			
UL/LG/RR/6-20	150	500			
UL/LG/RR/6-24	150	600			
UL/LG/RR/6-30	150	750			
UL/LG/RR/6-32	150	800			
UL/LG/RR/6-36	150	900			
UL/LG/RR/6-40	150	1000			

Dimension in Millimetre


Abbreviation: B - Rung Spacing H - Height W - Width

When ordering Material and Finish as straight cable ladder please also indicate Width (W2).

Steel Cable Ladder

Steel Cable Ladder - Straight Offset Reducer

Type: UL/LG/SR

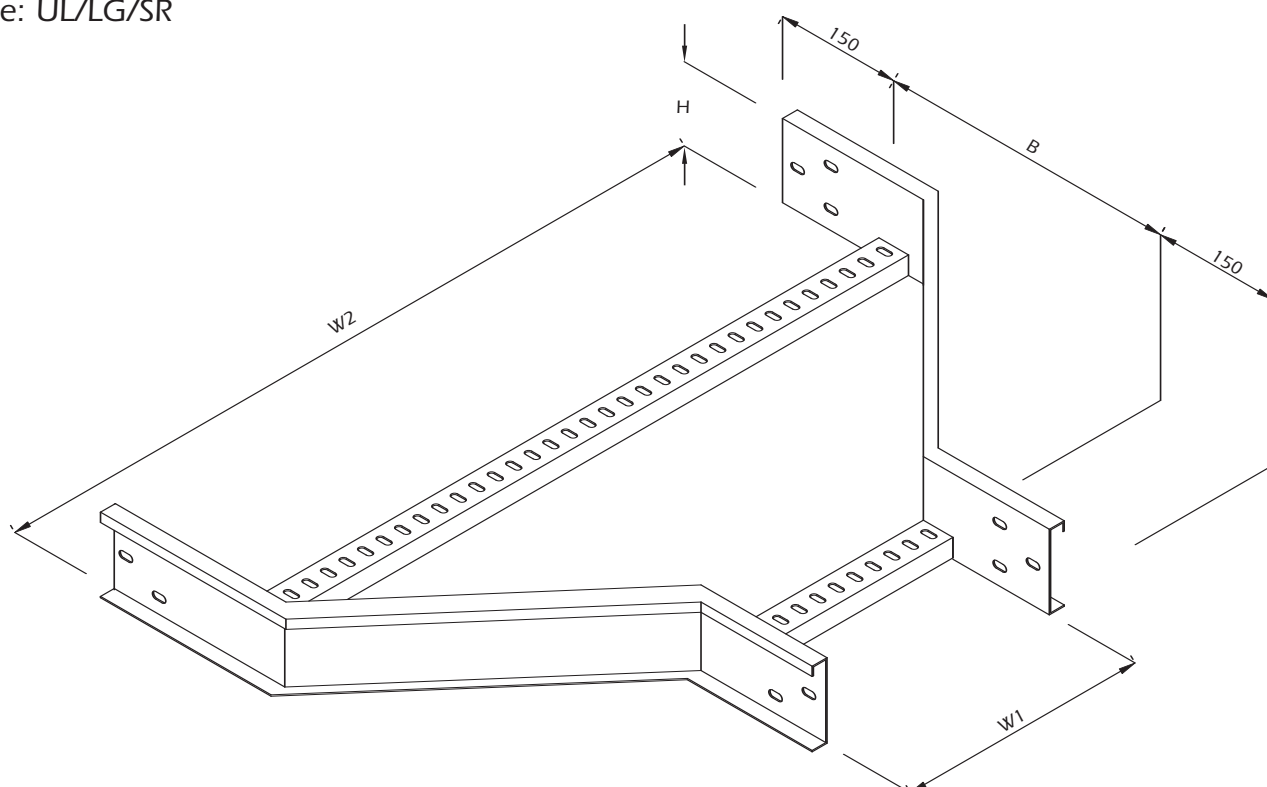

Rung Spacing 300mm

Components Ref.	H	W1	W2	Thickness	Finish
UL/LG/SR/2-6	50	150	200 to 1000	As Straight Cable Ladder	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LG/SR/2-8	50	200			
UL/LG/SR/2-10	50	250			
UL/LG/SR/2-12	50	300			
UL/LG/SR/3-6	75	150			
UL/LG/SR/3-8	75	200			
UL/LG/SR/3-10	75	250			
UL/LG/SR/3-12	75	300			
UL/LG/SR/4-6	100	150			
UL/LG/SR/4-8	100	200			
UL/LG/SR/4-10	100	250			
UL/LG/SR/4-12	100	300			
UL/LG/SR/4-16	100	400			
UL/LG/SR/4-18	100	450			
UL/LG/SR/4-20	100	500			
UL/LG/SR/4-24	100	600			
UL/LG/SR/4-30	100	750			
UL/LG/SR/4-36	100	900			
UL/LG/SR/4-40	100	1000			
UL/LG/SR/5-8	125	200			

Components Ref.	H	W1	W2	Thickness	Finish
UL/LG/SR/5-10	125	250	200 to 1000	As Straight Cable Ladder	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LG/SR/5-12	125	300			
UL/LG/SR/5-16	125	400			
UL/LG/SR/5-18	125	450			
UL/LG/SR/5-20	125	500			
UL/LG/SR/5-24	125	600			
UL/LG/SR/5-30	125	750			
UL/LG/SR/5-36	125	900			
UL/LG/SR/5-40	125	1000			
UL/LG/SR/6-8	150	200			
UL/LG/SR/6-10	150	250			
UL/LG/SR/6-12	150	300			
UL/LG/SR/6-16	150	400			
UL/LG/SR/6-18	150	450			
UL/LG/SR/6-20	150	500			
UL/LG/SR/6-24	150	600			
UL/LG/SR/6-30	150	750			
UL/LG/SR/6-32	150	800			
UL/LG/SR/6-36	150	900			
UL/LG/SR/6-40	150	1000			

Dimension in Millimetre


Abbreviation: B - Rung Spacing H - Height W - Width

When ordering Material and Finish as straight cable ladder please also indicate Width (W2).

Steel Cable Ladder

Steel Cable Ladder - Straight Divider

Type: UL/LG/SD

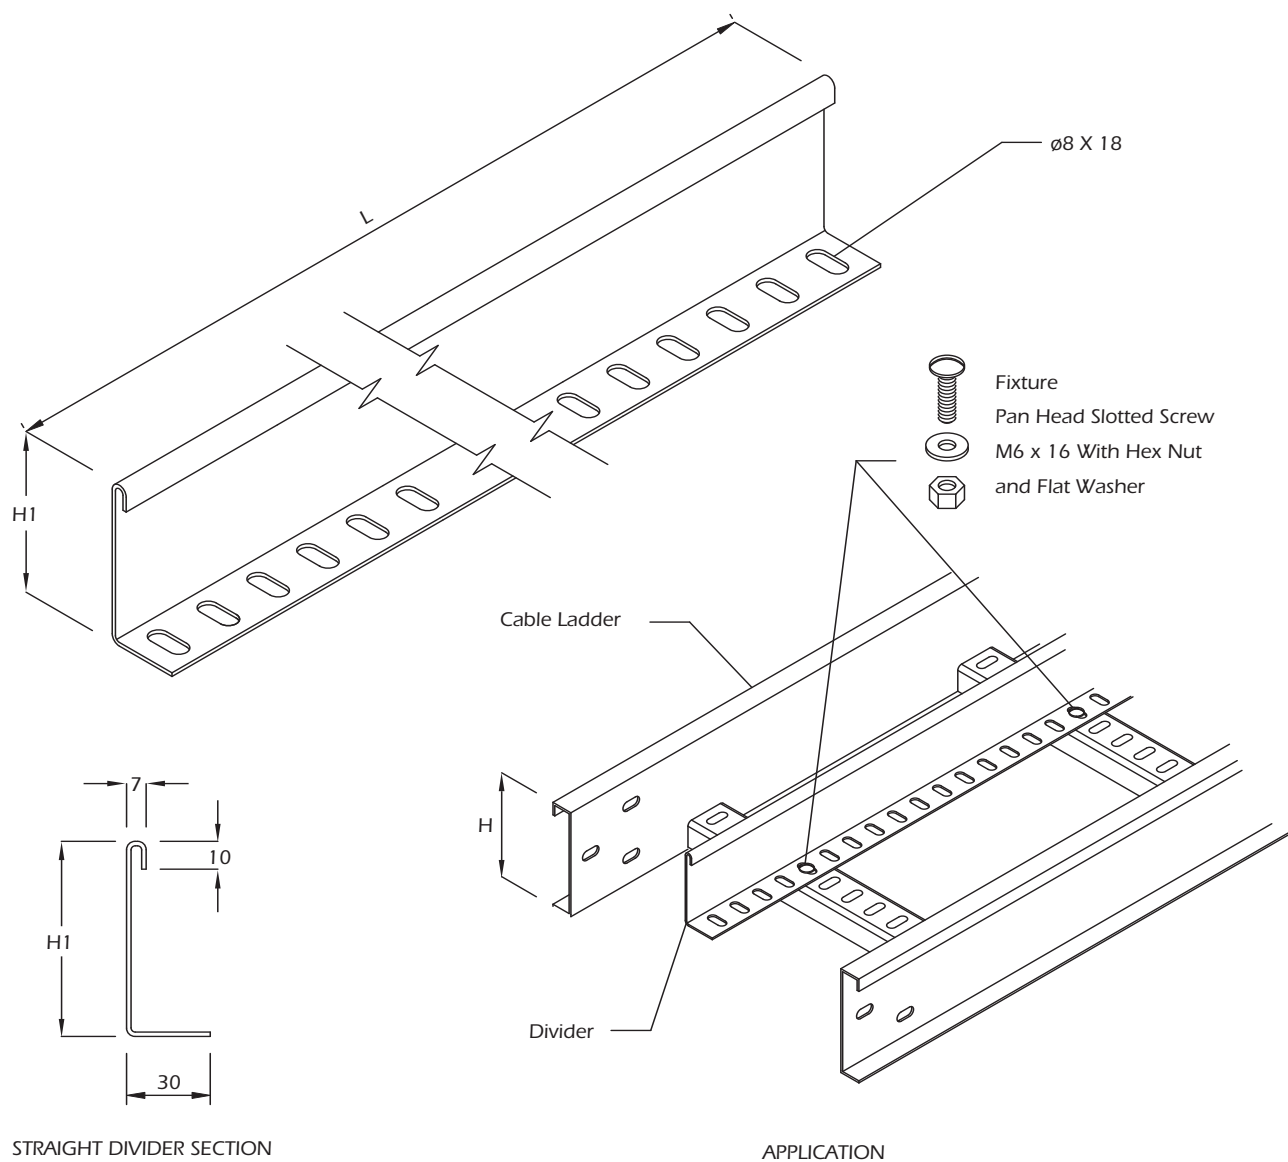

Components Ref.	H	H1	Thickness	L	Finish
UL/LG/SD-2	50	20	1.5	1500 or 3000	Hot Dip Galvanised Epoxy or Polyester Coated Stainless
UL/LG/SD-3	75	45	1.5		
UL/LG/SD-4	100	70	2.0		
UL/LG/SD-5	125	95	2.0		
UL/LG/SD-6	150	120	2.0		


Dimension in Millimetre
 Abbreviation: H - Height L - Length

When ordering Material and Finish as straight cable ladder please also indicate Length (L).

Steel Cable Ladder

Steel Cable Ladder - Straight Cover

Type: UL/LG/SC

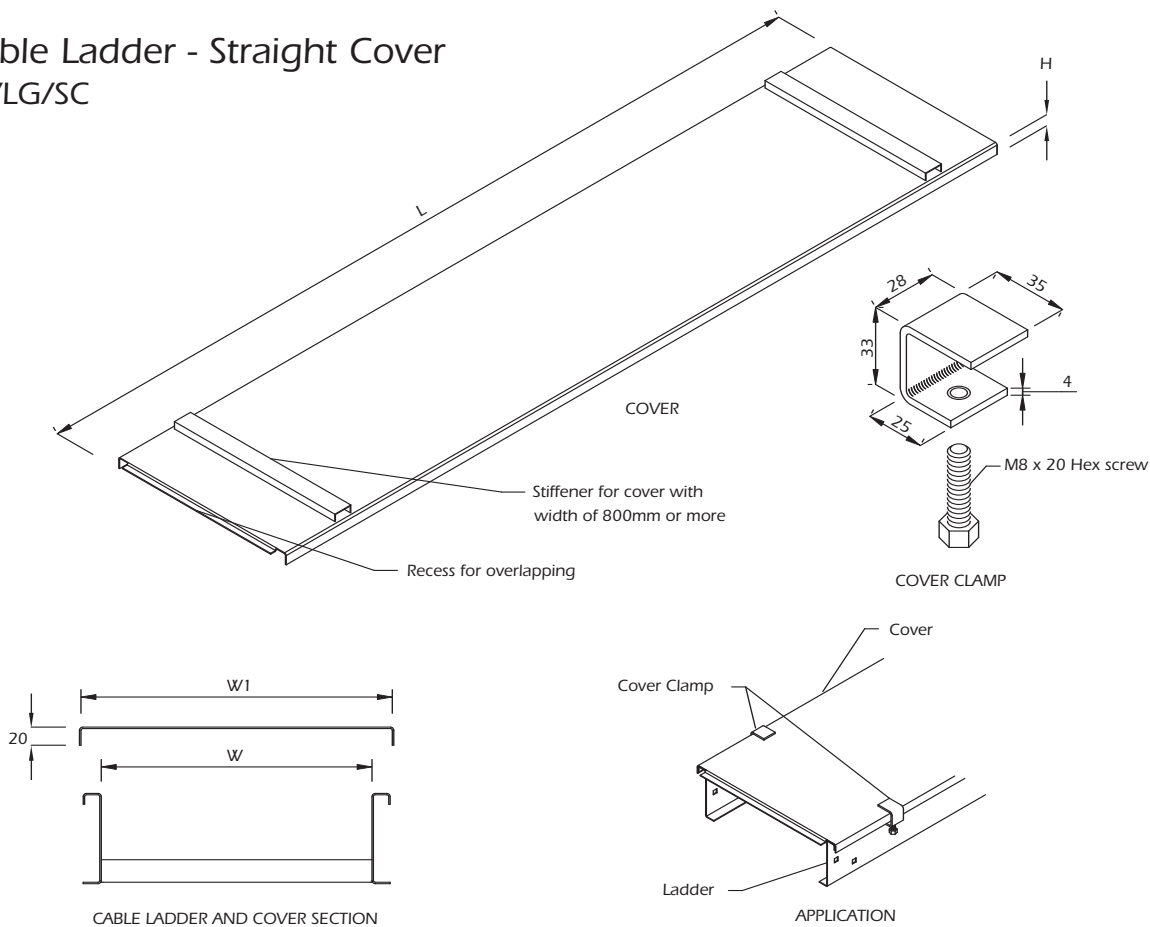

Components Ref.	H	W	W1	Thickness	L	Finish
UL/LG/SC-1	16	150	195	1.5	1500 or 3000	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LG/SC-2	16	200	245	1.5		
UL/LG/SC-3	16	250	295	1.5		
UL/LG/SC-4	16	300	345	1.5		
UL/LG/SC-5	16	150	195	1.5		
UL/LG/SC-6	16	200	245	1.5		
UL/LG/SC-7	16	250	295	1.5		
UL/LG/SC-8	16	300	345	1.5		
UL/LG/SC-9	16	150	195	2.0		
UL/LG/SC-10	16	200	245	2.0		
UL/LG/SC-11	16	250	295	2.0		
UL/LG/SC-12	16	300	345	2.0		
UL/LG/SC-13	16	400	445	2.0		
UL/LG/SC-14	16	450	495	2.0		
UL/LG/SC-15	16	500	545	2.0		
UL/LG/SC-16	16	600	645	2.0		
UL/LG/SC-17	16	750	795	2.0		
UL/LG/SC-18	16	900	945	2.0		
UL/LG/SC-19	16	1000	1045	2.0		
UL/LG/SC-20	16	200	245	2.0		

Components Ref.	H	W	W1	Thickness	L	Finish
UL/LG/SC-21	16	250	295	2.0	1500 or 3000	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LG/SC-22	16	300	345	2.0		
UL/LG/SC-23	16	400	445	2.0		
UL/LG/SC-24	16	450	495	2.0		
UL/LG/SC-25	16	500	545	2.0		
UL/LG/SC-26	16	600	645	2.0		
UL/LG/SC-27	16	750	795	2.0		
UL/LG/SC-28	16	900	945	2.0		
UL/LG/SC-29	16	1000	1045	2.0		
UL/LG/SC-30	16	200	245	2.0		
UL/LG/SC-31	16	250	295	2.0		
UL/LG/SC-32	16	300	345	2.0		
UL/LG/SC-33	16	400	445	2.0		
UL/LG/SC-34	16	450	495	2.0		
UL/LG/SC-35	16	500	545	2.0		
UL/LG/SC-36	16	600	645	2.0		
UL/LG/SC-37	16	750	795	2.0		
UL/LG/SC-38	16	800	845	2.0		
UL/LG/SC-39	16	900	945	2.0		
UL/LG/SC-40	16	1000	1045	2.0		

Components Ref.	Description
UL/LZ/CMP	Cable Ladder Cover Clamp


Dimension in Millimetre
Abbreviation: H - Height L - Length W - Width

When ordering Material and Finish as straight cable ladder please also indicate Length (L).


Steel Cable Ladder

Steel Cable Ladder - Horizontal Splice Plate

Type: UL/LG/HS-6

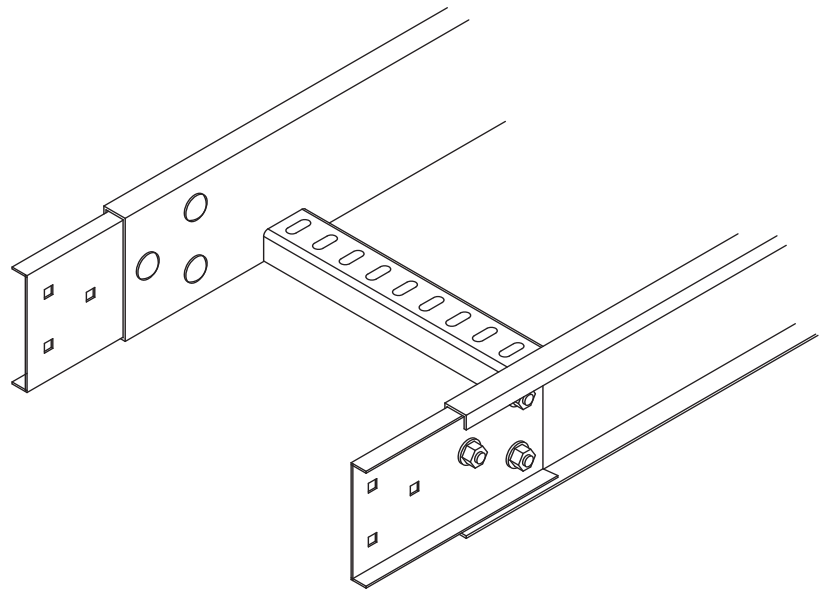

Application

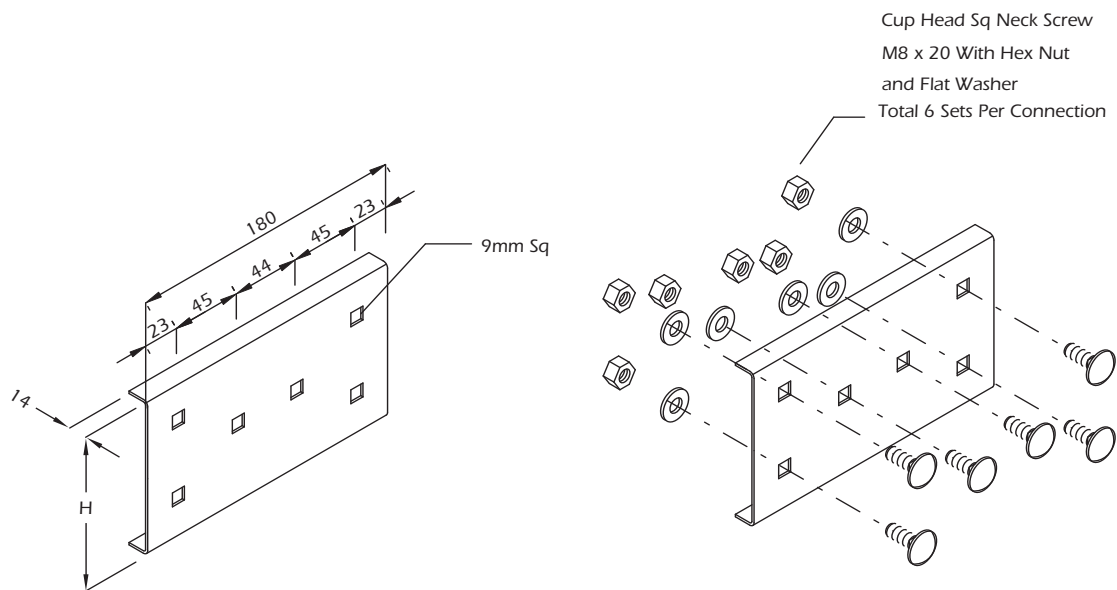

Splice Plate and Fixture

Components Ref.	Cable Ladder Height	H	Finish
UL/LG/HS-6-4	100	To Fit Cable Ladder with 2mm Clearance	Hot Dip Galvanised Epoxy or Polyester Coated Stainless
UL/LG/HS-6-5	125		
UL/LG/HS-6-6	150		


Dimension in Millimetre
Abbreviation: H - Height

Material and Finish as straight cable ladder.



Steel Cable Ladder

Steel Cable Ladder - Horizontal Splice Plate

Type: UL/LG/HS-4

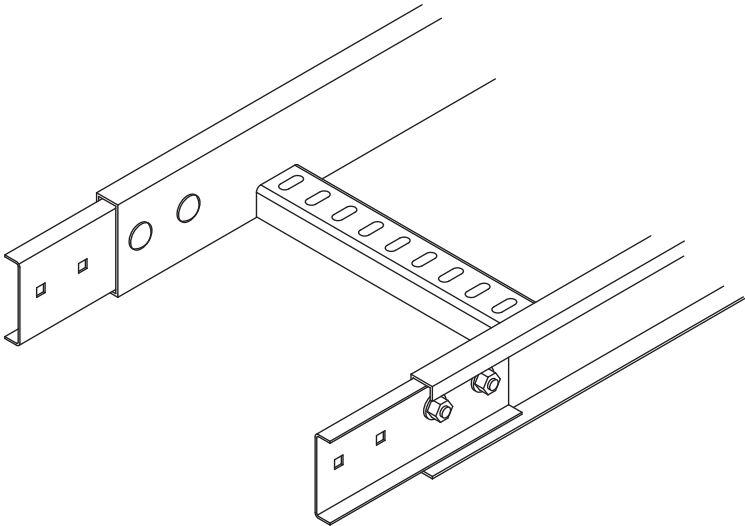

Application

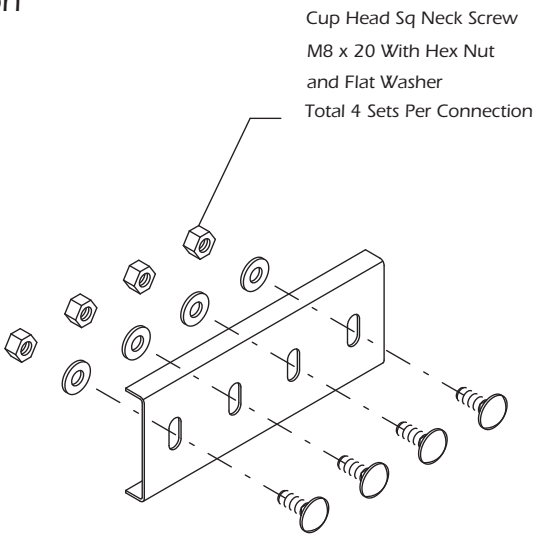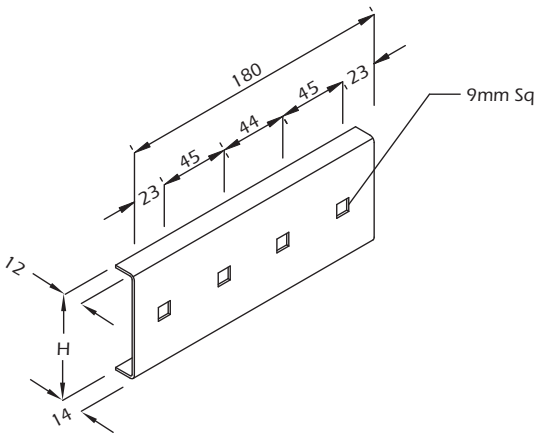

Splice Plate and Fixture

Components Ref.	Cable Ladder Height	H	Finish
UL/LG/HS-4-2	50	To Fit Cable Ladder with 2mm Clearance	Hot Dip Galvanised Epoxy or Polyester Coated Stainless
UL/LG/HS-4-3	75		


Dimension in Millimetre
Abbreviation: H - Height

Material and Finish as straight cable ladder.


Steel Cable Ladder

Steel Cable Ladder - Vertical Adjustable Splice Plate

Type: UL/LG/VAS-6

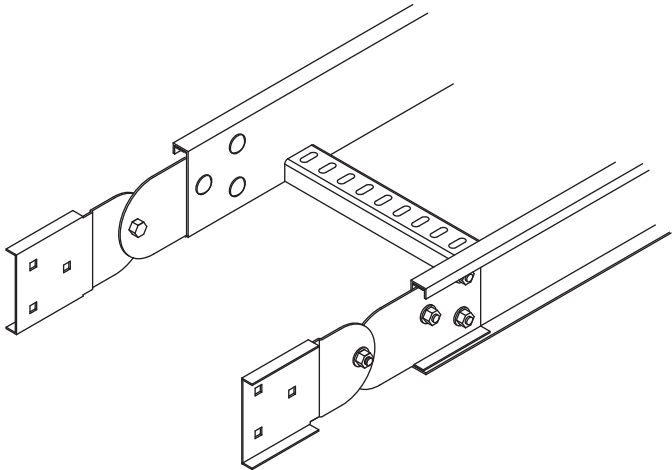

Application

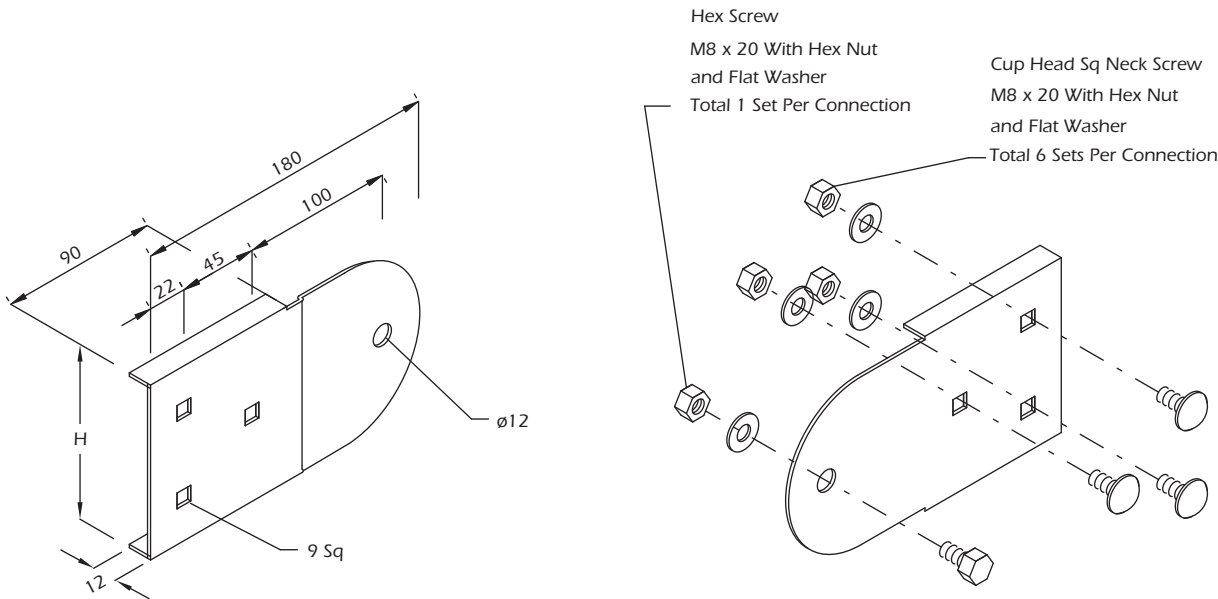

Splice Plate and Fixture

Components Ref.	Cable Ladder Height	H	Finish
UL/LG/VAS-6-4	100	To Fit Cable Ladder with 2mm Clearance	Hot Dip Galvanised Epoxy or Polyester Coated Stainless
UL/LG/VAS-6-5	125		
UL/LG/VAS-6-6	150		


Dimension in Millimetre
Abbreviation: H - Height

Material and Finish as straight cable ladder.



Steel Cable Ladder

Steel Cable Ladder - Vertical Adjustable Splice Plate

Type: UL/LG/VAS-4

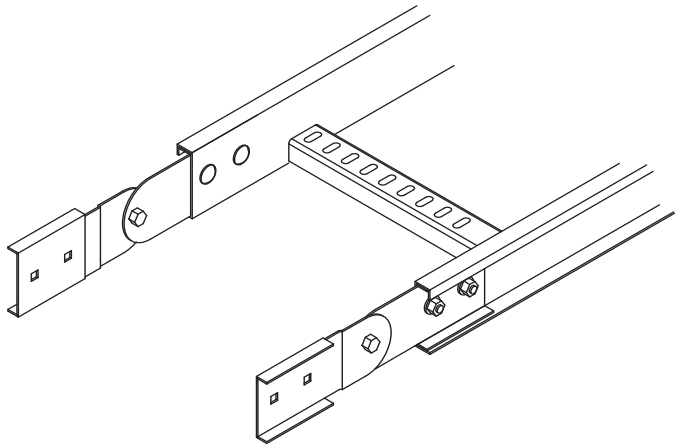

Application

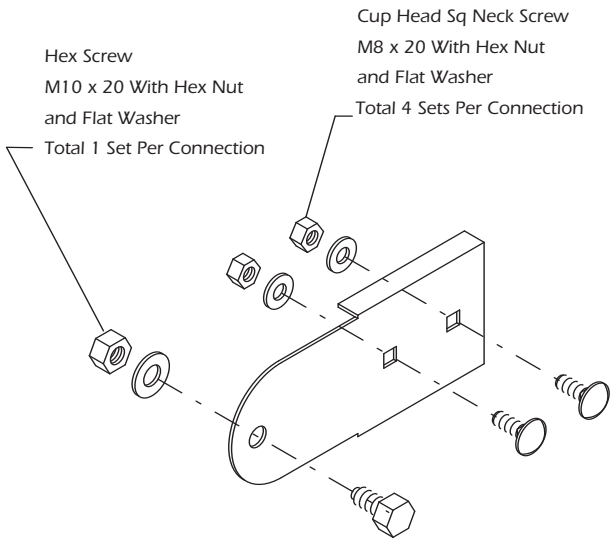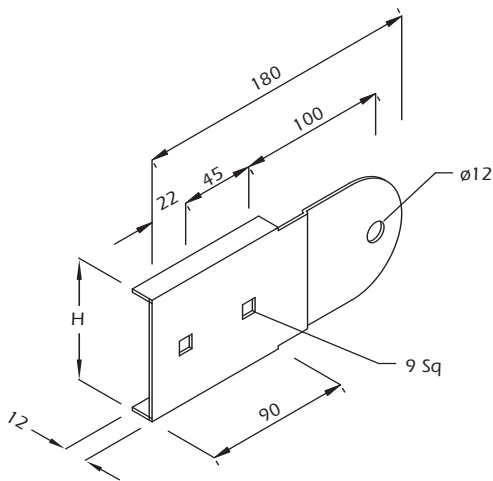

Splice Plate and Fixture

Components Ref.	Cable Ladder Height	H	Finish
UL/LG/VAS-4-2	50	To Fit Cable Ladder with 2mm Clearance	Hot Dip Galvanised Epoxy or Polyester Coated Stainless
UL/LG/VAS-4-3	75		


Dimension in Millimetre
Abbreviation: H - Height

Material and Finish as straight cable ladder.


Steel Cable Ladder

Steel Cable Ladder - Horizontal Adjustable Splice Plate

Type: UL/LG/HAS-6

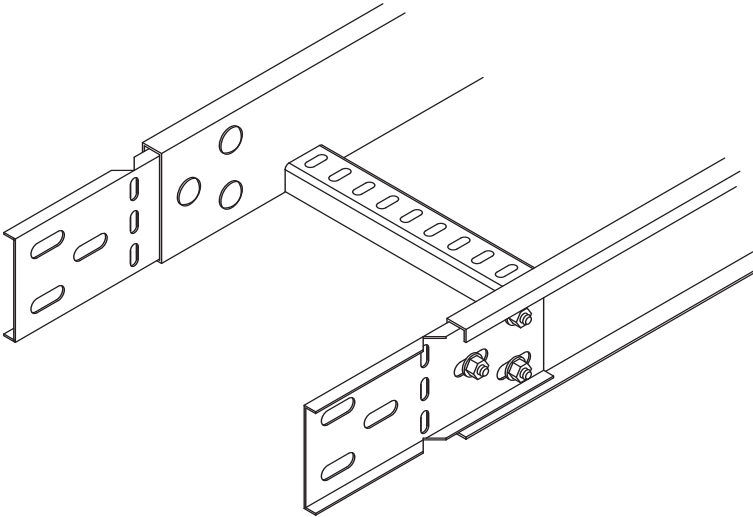

Application

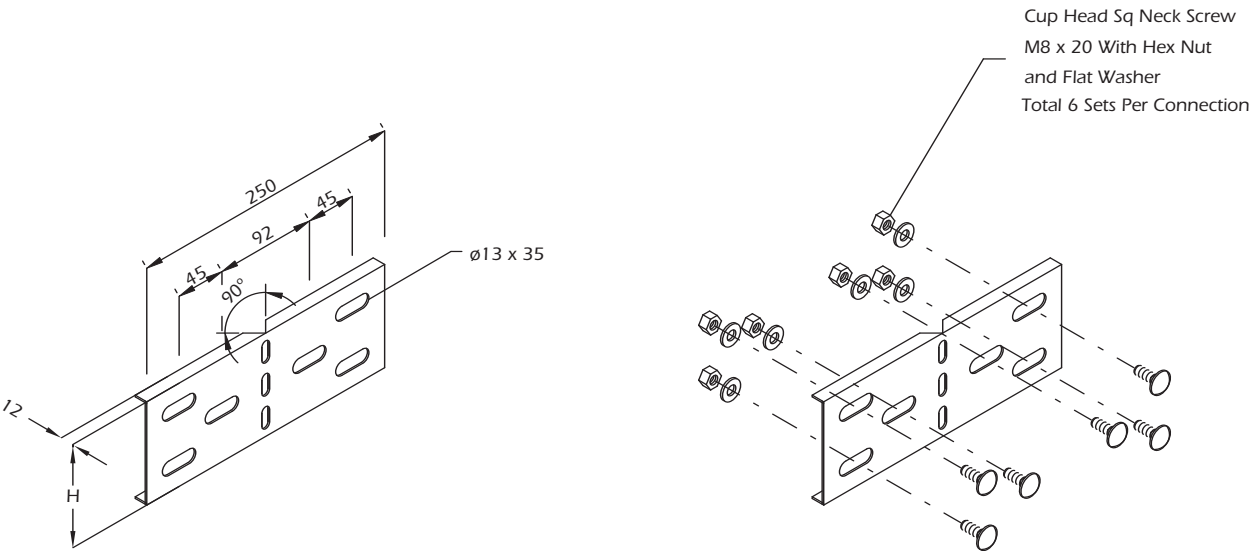

Splice Plate and Fixture

Components Ref.	Cable Ladder Height	H	Finish
UL/LG/HAS-6-4	100	To Fit Cable Ladder with 2mm Clearance	Hot Dip Galvanised Epoxy or Polyester Coated Stainless
UL/LG/HAS-6-5	125		
UL/LG/HAS-6-6	150		


Dimension in Millimetre
Abbreviation: H - Height

Material and Finish as straight cable ladder.


Steel Cable Ladder

Steel Cable Ladder - Horizontal Adjustable Splice Plate

Type: UL/LG/HAS-4

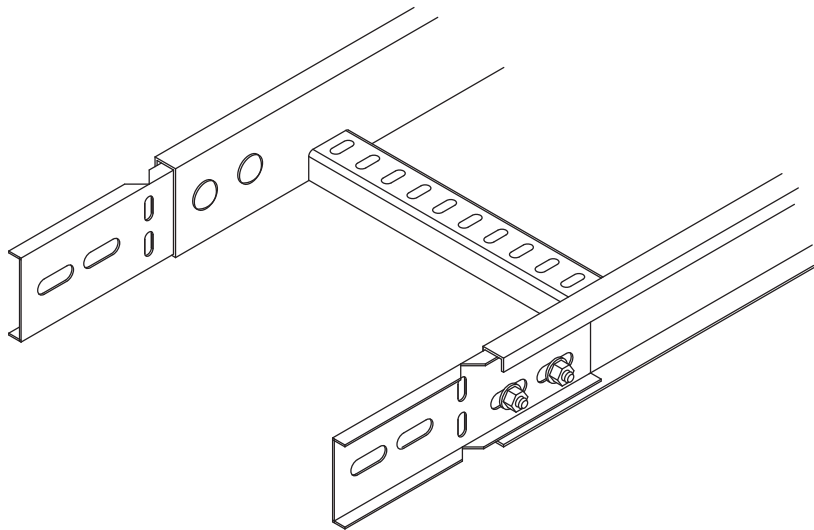

Application

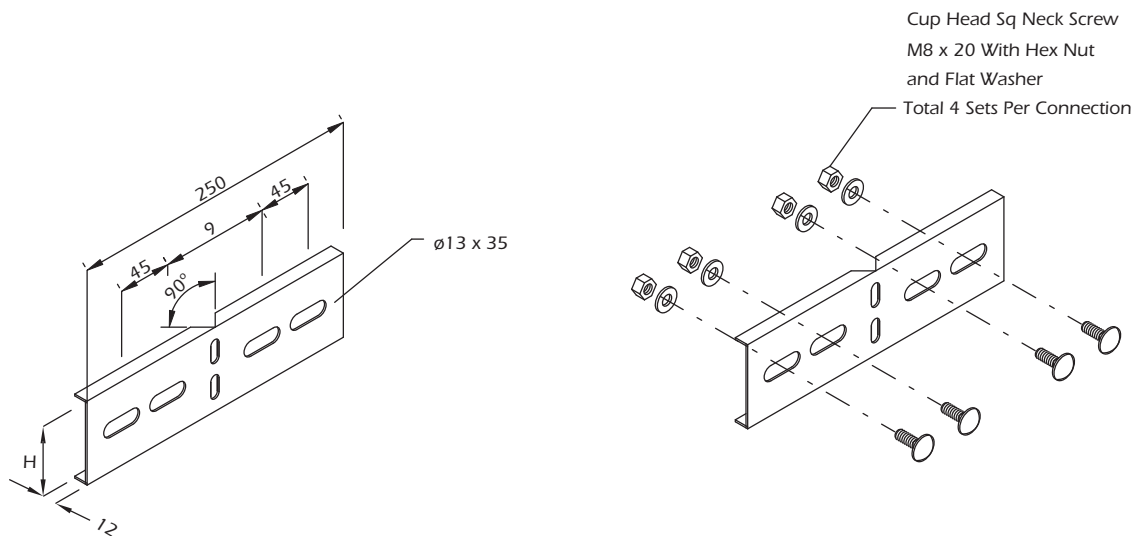

Splice Plate and Fixture


Components Ref.	Cable Ladder Height	H	Finish
UL/LG/HAS-4-2	50	To Fit Cable Ladder with 2mm Clearance	Hot Dip Galvanised Epoxy or Polyester Coated Stainless
UL/LG/HAS-4-3	75		

Dimension in Millimetre
Abbreviation: H - Height


Material and Finish as straight cable ladder.

Steel Cable Ladder

Steel Cable Ladder - End Plate Type: UL/LG/EP-6

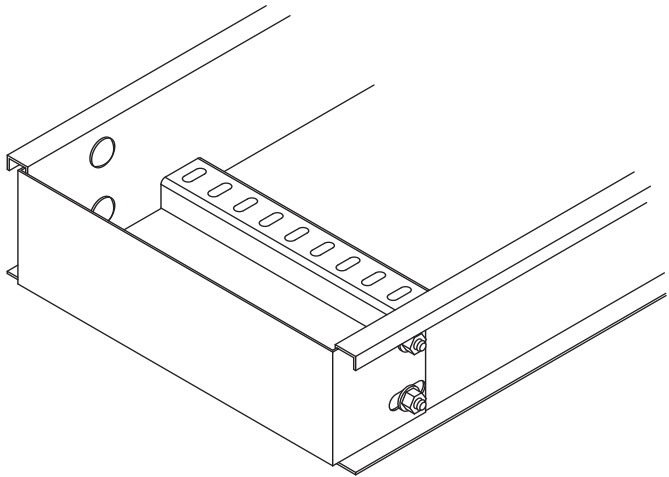

Application

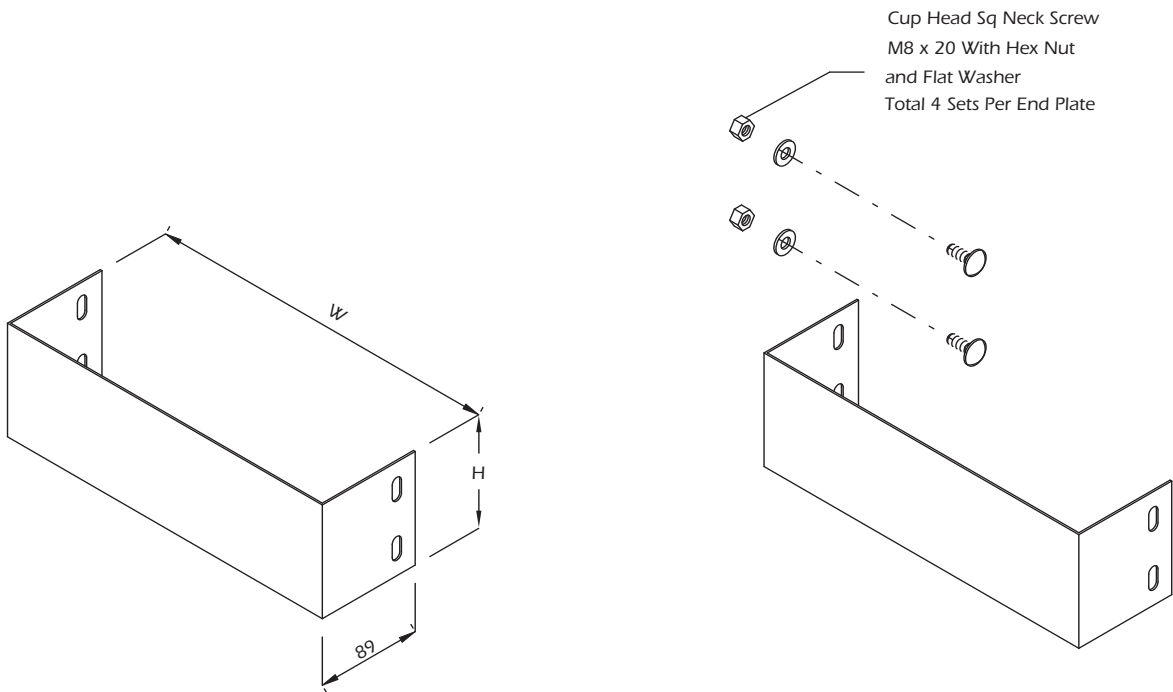

End Plate with Fixture


Components Ref.	Cable Ladder Height	H	Finish
UL/LG/EP-6-4	100	To Fit Cable Ladder with 2mm Clearance	Hot Dip Galvanised Epoxy or Polyester Coated Stainless
UL/LG/EP-6-5	125		
UL/LG/EP-6-6	150		

Dimension in Millimetre
Abbreviation: H - Height


Material and Finish as straight cable ladder.

Steel Cable Ladder

Steel Cable Ladder - End Plate
Type: UL/LG/EP-4

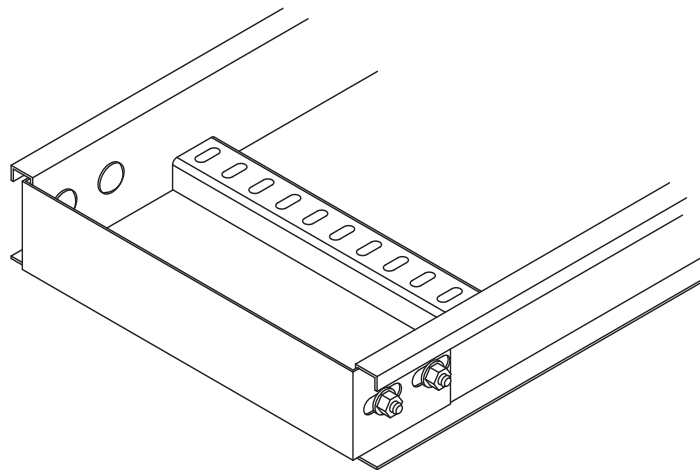

Application

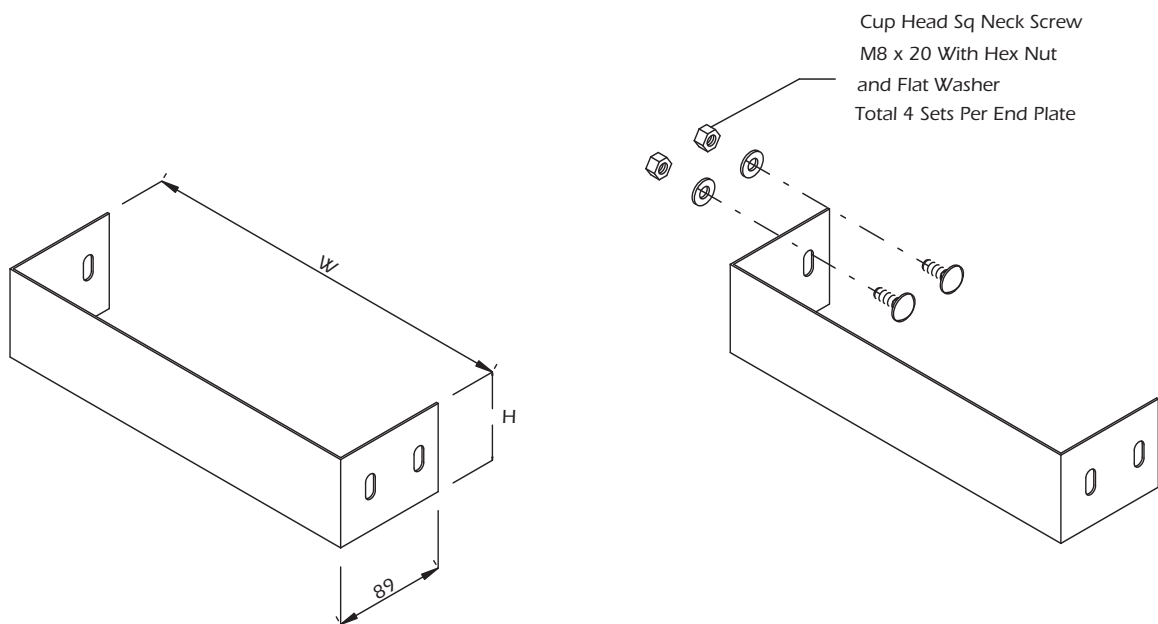

End Plate with Fixture

Components Ref.	Cable Ladder Height	H	Finish
UL/LG/EP-4-2	50	To Fit Cable Ladder with 2mm Clearance	Hot Dip Galvanised Epoxy or Polyester Coated Stainless
UL/LG/EP-4-3	75		


Dimension in Millimetre
Abbreviation: H - Height

Material and Finish as straight cable ladder.


Steel Cable Ladder

Steel Cable Ladder - Hold Down Clamp

Type: UL/L-CP

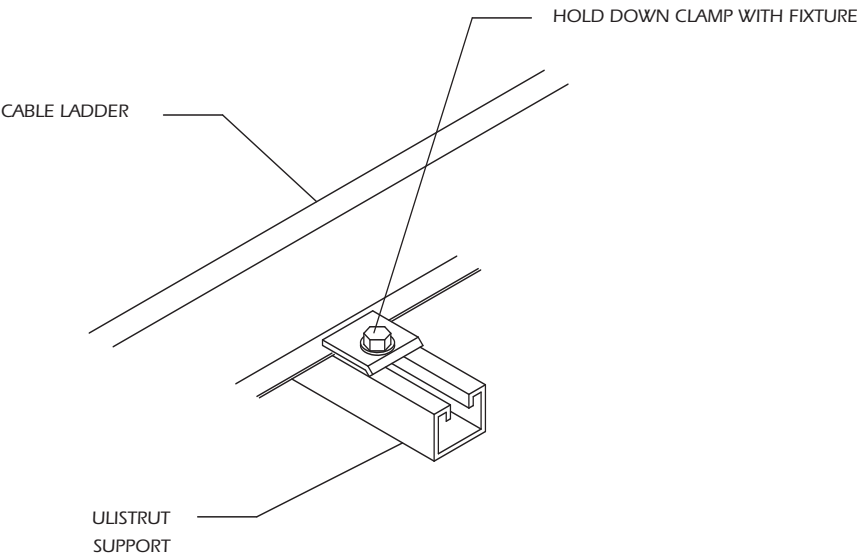

Application

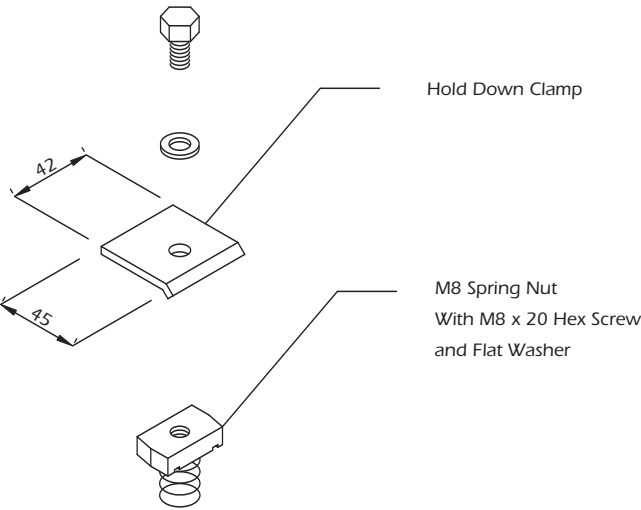

Clamp and Fixture


Components Ref.	Description	Thickness	Finish
UL/L-CP	Hold Down Clamp	4mm	Hot Dip Galvanised Epoxy or Polyester Coated Stainless

Dimension in Millimetre

When ordering please indicate Material and Finish.

Steel Cable Ladder

Steel Cable Ladder - Straight Type: UL/LC/ST

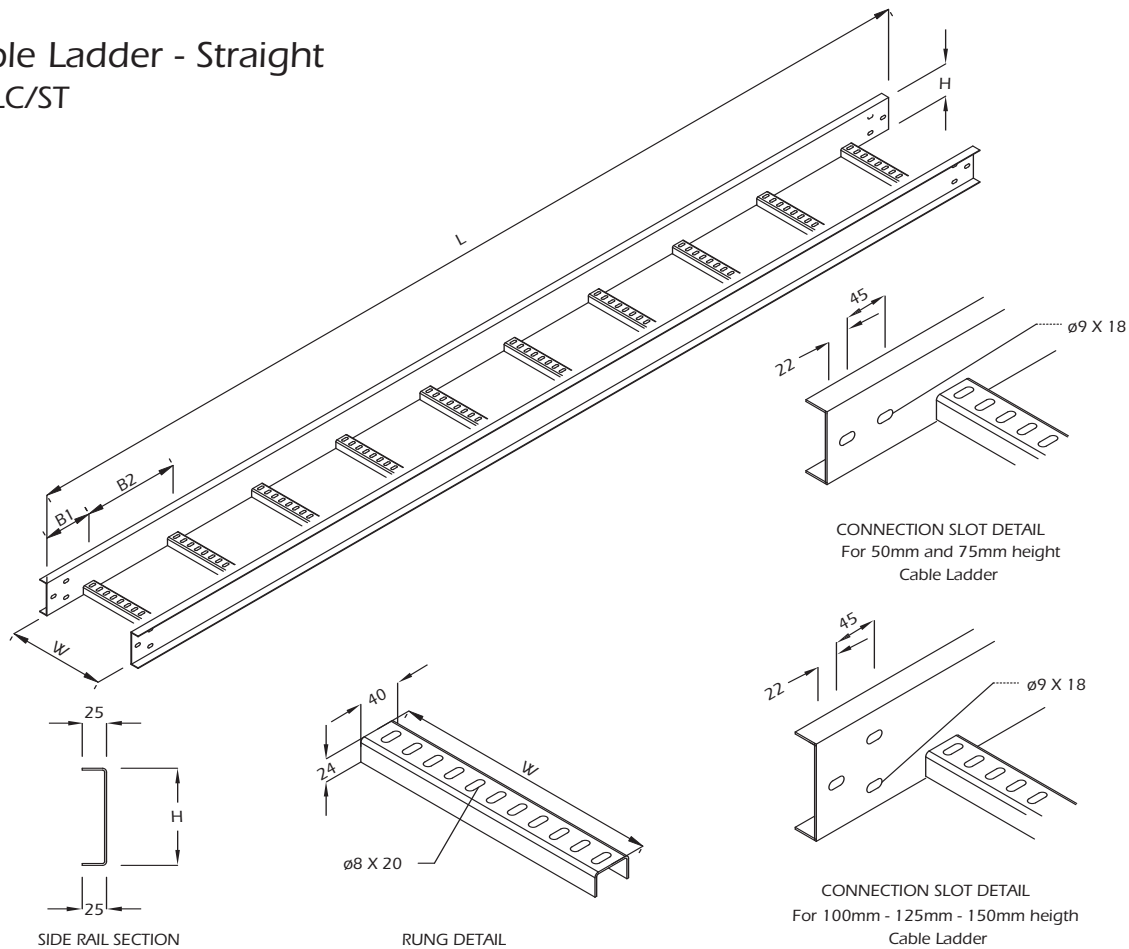

Components Ref.	H	W	B1	B2	L	Thickness	Finish
UL/LC/ST/2-6	50	150	150	300	3000	1.5	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LC/ST/2-8	50	200	150	300	3000	1.5	
UL/LC/ST/2-10	50	250	150	300	3000	1.5	
UL/LC/ST/2-12	50	300	150	300	3000	1.5	
UL/LC/ST/3-6	75	150	150	300	3000	1.5	
UL/LC/ST/3-8	75	200	150	300	3000	1.5	
UL/LC/ST/3-10	75	250	150	300	3000	1.5	
UL/LC/ST/3-12	75	300	150	300	3000	1.5	
UL/LC/ST/4-6	100	150	150	300	3000	2.0	
UL/LC/ST/4-8	100	200	150	300	3000	2.0	
UL/LC/ST/4-10	100	250	150	300	3000	2.0	
UL/LC/ST/4-12	100	300	150	300	3000	2.0	
UL/LC/ST/4-16	100	400	150	300	3000	2.0	
UL/LC/ST/4-18	100	450	150	300	3000	2.0	
UL/LC/ST/4-20	100	500	150	300	3000	2.0	
UL/LC/ST/4-24	100	600	150	300	3000	2.0	
UL/LC/ST/4-30	100	750	150	300	3000	2.0	
UL/LC/ST/4-36	100	900	150	300	3000	2.0	
UL/LC/ST/4-40	100	1000	150	300	3000	2.0	
UL/LC/ST/5-8	125	200	150	300	3000	2.0	

Components Ref.	H	W	B1	B2	L	Thickness	Finish
UL/LC/ST/5-10	125	250	150	300	3000	2.0	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LC/ST/5-12	125	300	150	300	3000	2.0	
UL/LC/ST/5-16	125	400	150	300	3000	2.0	
UL/LC/ST/5-18	125	450	150	300	3000	2.0	
UL/LC/ST/5-20	125	500	150	300	3000	2.0	
UL/LC/ST/5-24	125	600	150	300	3000	2.0	
UL/LC/ST/5-30	125	750	150	300	3000	2.0	
UL/LC/ST/5-36	125	900	150	300	3000	2.0	
UL/LC/ST/5-40	125	1000	150	300	3000	2.0	
UL/LC/ST/6-8	150	200	150	300	3000	2.0	
UL/LC/ST/6-10	150	250	150	300	3000	2.0	
UL/LC/ST/6-12	150	300	150	300	3000	2.0	
UL/LC/ST/6-16	150	400	150	300	3000	2.0	
UL/LC/ST/6-18	150	450	150	300	3000	2.0	
UL/LC/ST/6-20	150	500	150	300	3000	2.0	
UL/LC/ST/6-24	150	600	150	300	3000	2.0	
UL/LC/ST/6-30	150	750	150	300	3000	2.0	
UL/LC/ST/6-32	150	800	150	300	3000	2.0	
UL/LC/ST/6-36	150	900	150	300	3000	2.0	
UL/LC/ST/6-40	150	1000	150	300	3000	2.0	

Dimension in Millimetre

Abbreviation: B - Rung Spacing H - Height L - Length


When ordering please indicate Material and Finish.

We also supply other sizes with the same Side Rail, Rung Profile and various number of Connection Slots.

Steel Cable Ladder

Steel Cable Ladder - 90° Elbow

Type: UL/LC/EL90

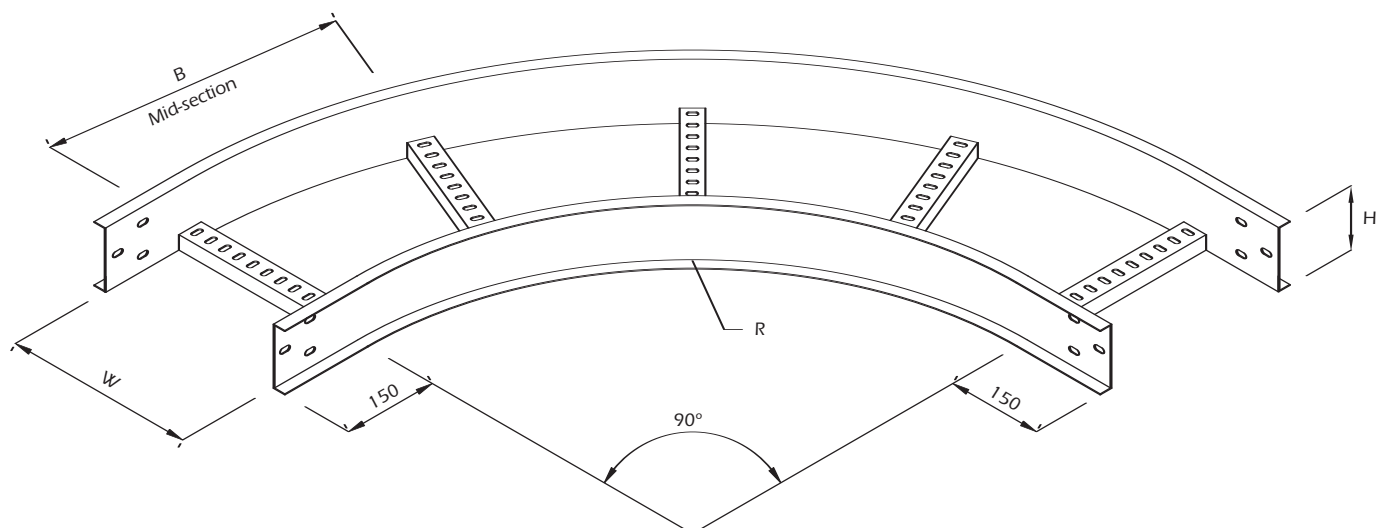

Rung Spacing 300mm

Components Ref.	H	W	Thickness	R (Radii)	Finish
UL/LC/EL90/2-6	50	150	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LC/EL90/2-8	50	200			
UL/LC/EL90/2-10	50	250			
UL/LC/EL90/2-12	50	300			
UL/LC/EL90/3-6	75	150			
UL/LC/EL90/3-8	75	200			
UL/LC/EL90/3-10	75	250			
UL/LC/EL90/3-12	75	300			
UL/LC/EL90/4-6	100	150			
UL/LC/EL90/4-8	100	200			
UL/LC/EL90/4-10	100	250			
UL/LC/EL90/4-12	100	300			
UL/LC/EL90/4-16	100	400			
UL/LC/EL90/4-18	100	450			
UL/LC/EL90/4-20	100	500			
UL/LC/EL90/4-24	100	600			
UL/LC/EL90/4-30	100	750			
UL/LC/EL90/4-36	100	900			
UL/LC/EL90/4-40	100	1000			
UL/LC/EL90/5-8	125	200			

Components Ref.	H	W	Thickness	R (Radii)	Finish
UL/LC/EL90/5-10	125	250	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LC/EL90/5-12	125	300			
UL/LC/EL90/5-16	125	400			
UL/LC/EL90/5-18	125	450			
UL/LC/EL90/5-20	125	500			
UL/LC/EL90/5-24	125	600			
UL/LC/EL90/5-30	125	750			
UL/LC/EL90/5-36	125	900			
UL/LC/EL90/5-40	125	1000			
UL/LC/EL90/6-8	150	200			
UL/LC/EL90/6-10	150	250			
UL/LC/EL90/6-12	150	300			
UL/LC/EL90/6-16	150	400			
UL/LC/EL90/6-18	150	450			
UL/LC/EL90/6-20	150	500			
UL/LC/EL90/6-24	150	600			
UL/LC/EL90/6-30	150	750			
UL/LC/EL90/6-32	150	800			
UL/LC/EL90/6-36	150	900			
UL/LC/EL90/6-40	150	1000			

Dimension in Millimetre


Abbreviation: B - Rung Spacing H - Height R - Radii W - Width

When ordering Material and Finish as straight cable ladder please also indicate Radius.

Steel Cable Ladder

Steel Cable Ladder - 45° Elbow

Type: UL/LC/EL45

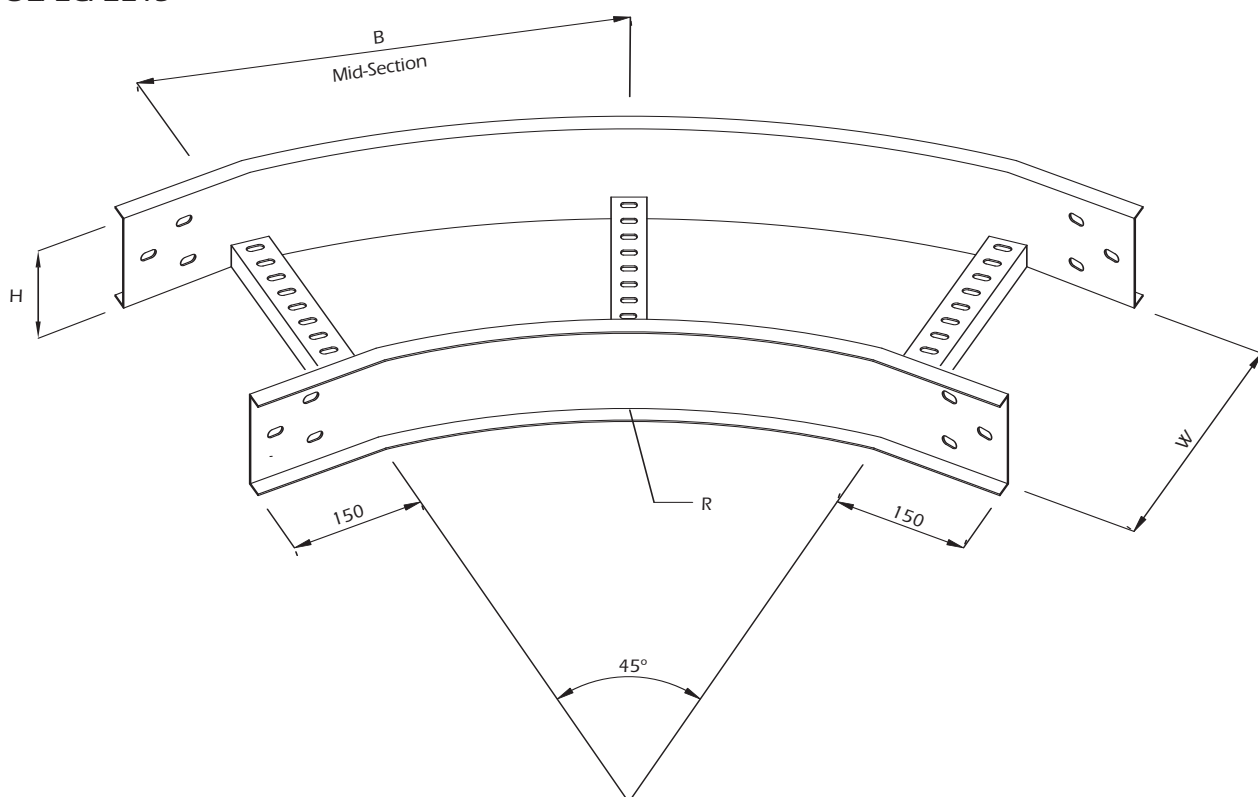

Rung Spacing 300mm

Components Ref.	H	W	Thickness	R (Radii)	Finish
UL/LC/EL45/2-6	50	150	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LC/EL45/2-8	50	200			
UL/LC/EL45/2-10	50	250			
UL/LC/EL45/2-12	50	300			
UL/LC/EL45/3-6	75	150			
UL/LC/EL45/3-8	75	200			
UL/LC/EL45/3-10	75	250			
UL/LC/EL45/3-12	75	300			
UL/LC/EL45/4-6	100	150			
UL/LC/EL45/4-8	100	200			
UL/LC/EL45/4-10	100	250			
UL/LC/EL45/4-12	100	300			
UL/LC/EL45/4-16	100	400			
UL/LC/EL45/4-18	100	450			
UL/LC/EL45/4-20	100	500			
UL/LC/EL45/4-24	100	600			
UL/LC/EL45/4-30	100	750			
UL/LC/EL45/4-36	100	900			
UL/LC/EL45/4-40	100	1000			
UL/LC/EL45/5-8	125	200			

Components Ref.	H	W	Thickness	R (Radii)	Finish
UL/LC/EL45/5-10	125	250	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LC/EL45/5-12	125	300			
UL/LC/EL45/5-16	125	400			
UL/LC/EL45/5-18	125	450			
UL/LC/EL45/5-20	125	500			
UL/LC/EL45/5-24	125	600			
UL/LC/EL45/5-30	125	750			
UL/LC/EL45/5-36	125	900			
UL/LC/EL45/5-40	125	1000			
UL/LC/EL45/6-8	150	200			
UL/LC/EL45/6-10	150	250			
UL/LC/EL45/6-12	150	300			
UL/LC/EL45/6-16	150	400			
UL/LC/EL45/6-18	150	450			
UL/LC/EL45/6-20	150	500			
UL/LC/EL45/6-24	150	600			
UL/LC/EL45/6-30	150	750			
UL/LC/EL45/6-32	150	800			
UL/LC/EL45/6-36	150	900			
UL/LC/EL45/6-40	150	1000			

Dimension in Millimetre


Abbreviation: B - Rung Spacing H - Height R - Radii W - Width

When ordering Material and Finish as straight cable ladder please also indicate Radius.

Steel Cable Ladder

Steel Cable Ladder - Horizontal Equal Tee

Type: UL/LC/ET

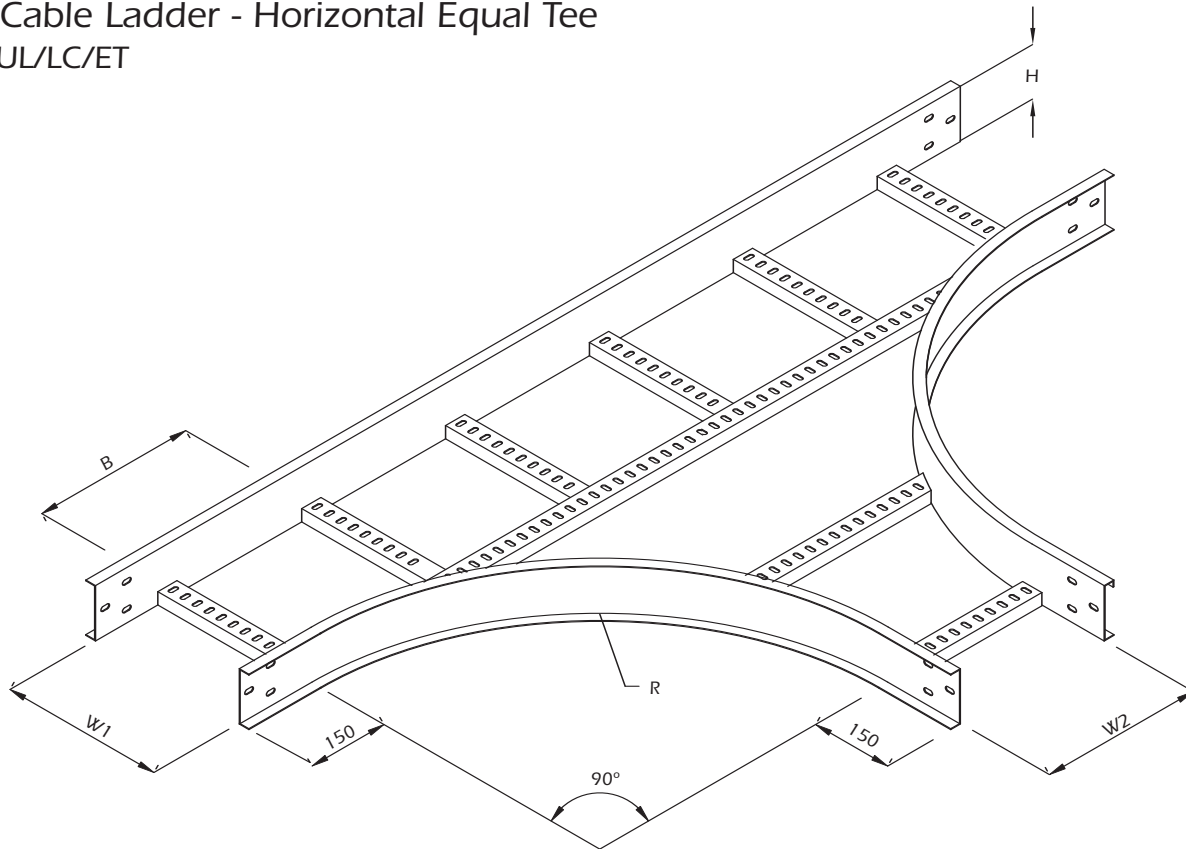

Rung Spacing 300mm

Components Ref.	H	W1	W2	Thickness	R (Radii)	Finish
UL/LC/ET/2-6	50	150	150	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LC/ET/2-8	50	200	200			
UL/LC/ET/2-10	50	250	250			
UL/LC/ET/2-12	50	300	300			
UL/LC/ET/3-6	75	150	150			
UL/LC/ET/3-8	75	200	200			
UL/LC/ET/3-10	75	250	250			
UL/LC/ET/3-12	75	300	300			
UL/LC/ET/4-6	100	150	150			
UL/LC/ET/4-8	100	200	200			
UL/LC/ET/4-10	100	250	250			
UL/LC/ET/4-12	100	300	300			
UL/LC/ET/4-16	100	400	400			
UL/LC/ET/4-18	100	450	450			
UL/LC/ET/4-20	100	500	500			
UL/LC/ET/4-24	100	600	600			
UL/LC/ET/4-30	100	750	750			
UL/LC/ET/4-36	100	900	900			
UL/LC/ET/4-40	100	1000	1000			
UL/LC/ET/5-8	125	200	200			

Components Ref.	H	W1	W2	Thickness	R (Radii)	Finish
UL/LC/ET/5-10	125	250	250	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LC/ET/5-12	125	300	300			
UL/LC/ET/5-16	125	400	400			
UL/LC/ET/5-18	125	450	450			
UL/LC/ET/5-20	125	500	500			
UL/LC/ET/5-24	125	600	600			
UL/LC/ET/5-30	125	750	750			
UL/LC/ET/5-36	125	900	900			
UL/LC/ET/5-40	125	1000	1000			
UL/LC/ET/6-8	150	200	200			
UL/LC/ET/6-10	150	250	250			
UL/LC/ET/6-12	150	300	300			
UL/LC/ET/6-16	150	400	400			
UL/LC/ET/6-18	150	450	450			
UL/LC/ET/6-20	150	500	500			
UL/LC/ET/6-24	150	600	600			
UL/LC/ET/6-30	150	750	750			
UL/LC/ET/6-32	150	800	800			
UL/LC/ET/6-36	150	900	900			
UL/LC/ET/6-40	150	1000	1000			

Dimension in Millimetre


Abbreviation: B - Rung Spacing H - Height R - Radii W - Width

When ordering Material and Finish as straight cable ladder please also indicate Radius.

Steel Cable Ladder

Steel Cable Ladder - Unequal Tee

Type: UL/LC/UT

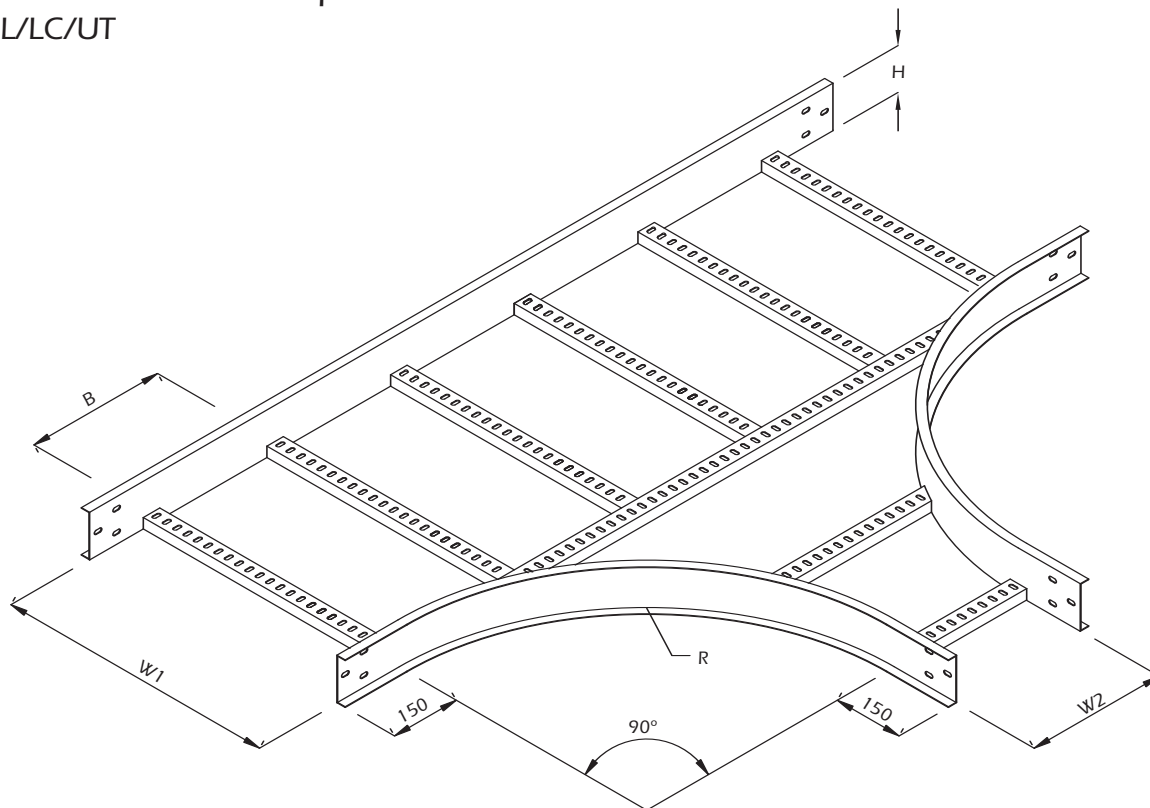

Rung Spacing 300mm

Components Ref.	H	W1	W2	Thickness	R (Radii)	Finish
UL/LC/UT/2-6	50	150	200 to 1000	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LC/UT/2-8	50	200				
UL/LC/UT/2-10	50	250				
UL/LC/UT/2-12	50	300				
UL/LC/UT/3-6	75	150				
UL/LC/UT/3-8	75	200				
UL/LC/UT/3-10	75	250				
UL/LC/UT/3-12	75	300				
UL/LC/UT/4-6	100	150				
UL/LC/UT/4-8	100	200				
UL/LC/UT/4-10	100	250				
UL/LC/UT/4-12	100	300				
UL/LC/UT/4-16	100	400				
UL/LC/UT/4-18	100	450				
UL/LC/UT/4-20	100	500				
UL/LC/UT/4-24	100	600				
UL/LC/UT/4-30	100	750				
UL/LC/UT/4-36	100	900				
UL/LC/UT/4-40	100	1000				
UL/LC/UT/5-8	125	200				

Components Ref.	H	W1	W2	Thickness	R (Radii)	Finish
UL/LC/UT/5-10	125	250	200 to 1000	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LC/UT/5-12	125	300				
UL/LC/UT/5-16	125	400				
UL/LC/UT/5-18	125	450				
UL/LC/UT/5-20	125	500				
UL/LC/UT/5-24	125	600				
UL/LC/UT/5-30	125	750				
UL/LC/UT/5-36	125	900				
UL/LC/UT/5-40	125	1000				
UL/LC/UT/6-8	150	200				
UL/LC/UT/6-10	150	250				
UL/LC/UT/6-12	150	300				
UL/LC/UT/6-16	150	400				
UL/LC/UT/6-18	150	450				
UL/LC/UT/6-20	150	500				
UL/LC/UT/6-24	150	600				
UL/LC/UT/6-30	150	750				
UL/LC/UT/6-32	150	800				
UL/LC/UT/6-36	150	900				
UL/LC/UT/6-40	150	1000				

Dimension in Millimetre


Abbreviation: B - Rung Spacing H - Height R - Radii W - Width

When ordering Material and Finish as straight cable ladder please also indicate Radius and Width (W2).

Steel Cable Ladder

Steel Cable Ladder - Equal Crosses

Type: UL/LC/EC

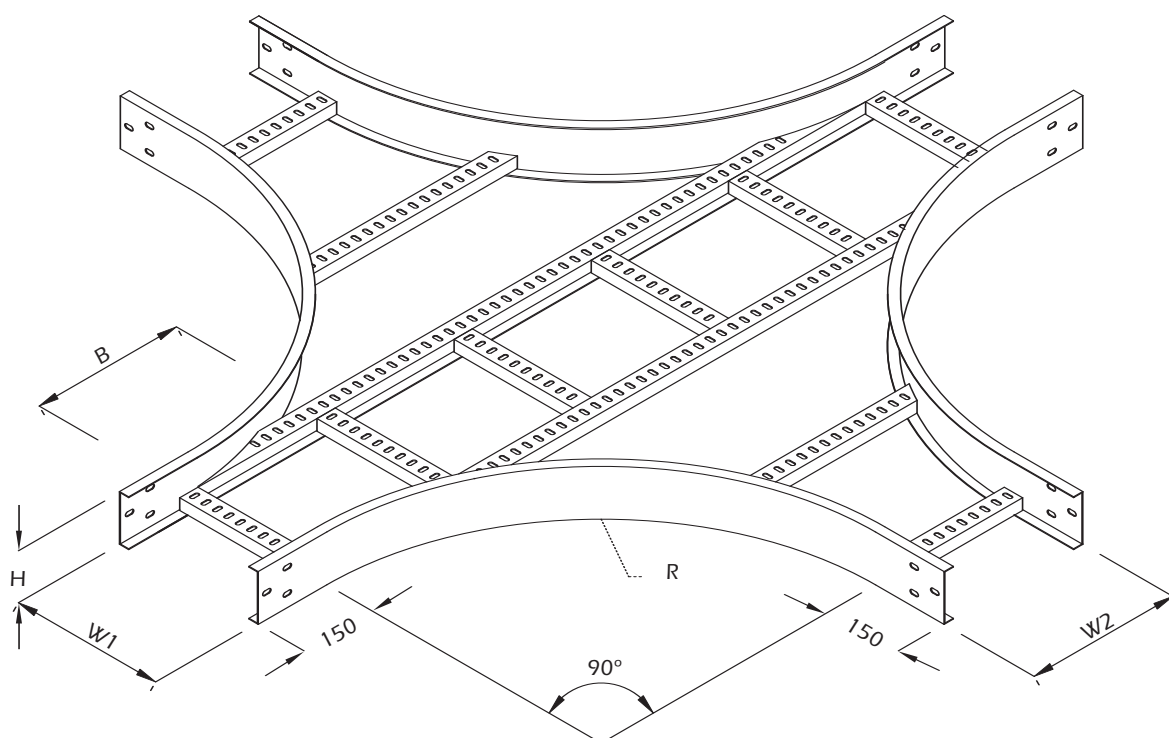

Rung Spacing 300mm

Components Ref.	H	W1	W2	Thickness	R (Radii)	Finish
UL/LC/EC/2-6	50	150	150	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LC/EC/2-8	50	200	200			
UL/LC/EC/2-10	50	250	250			
UL/LC/EC/2-12	50	300	300			
UL/LC/EC/3-6	75	150	150			
UL/LC/EC/3-8	75	200	200			
UL/LC/EC/3-10	75	250	250			
UL/LC/EC/3-12	75	300	300			
UL/LC/EC/4-6	100	150	150			
UL/LC/EC/4-8	100	200	200			
UL/LC/EC/4-10	100	250	250			
UL/LC/EC/4-12	100	300	300			
UL/LC/EC/4-16	100	400	400			
UL/LC/EC/4-18	100	450	450			
UL/LC/EC/4-20	100	500	500			
UL/LC/EC/4-24	100	600	600			
UL/LC/EC/4-30	100	750	750			
UL/LC/EC/4-36	100	900	900			
UL/LC/EC/4-40	100	1000	1000			
UL/LC/EC/5-8	125	200	200			

Components Ref.	H	W1	W2	Thickness	R (Radii)	Finish
UL/LC/EC/5-10	125	250	250	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LC/EC/5-12	125	300	300			
UL/LC/EC/5-16	125	400	400			
UL/LC/EC/5-18	125	450	450			
UL/LC/EC/5-20	125	500	500			
UL/LC/EC/5-24	125	600	600			
UL/LC/EC/5-30	125	750	750			
UL/LC/EC/5-36	125	900	900			
UL/LC/EC/5-40	125	1000	1000			
UL/LC/EC/6-8	150	200	200			
UL/LC/EC/6-10	150	250	250			
UL/LC/EC/6-12	150	300	300			
UL/LC/EC/6-16	150	400	400			
UL/LC/EC/6-18	150	450	450			
UL/LC/EC/6-20	150	500	500			
UL/LC/EC/6-24	150	600	600			
UL/LC/EC/6-30	150	750	750			
UL/LC/EC/6-32	150	800	800			
UL/LC/EC/6-36	150	900	900			
UL/LC/EC/6-40	150	1000	1000			

Dimension in Millimetre


Abbreviation: B - Rung Spacing H - Height R - Radii W - Width

When ordering Material and Finish as straight cable ladder please also indicate Radius.

Steel Cable Ladder

Steel Cable Ladder - Unequal Crosses

Type: UL/LC/UC

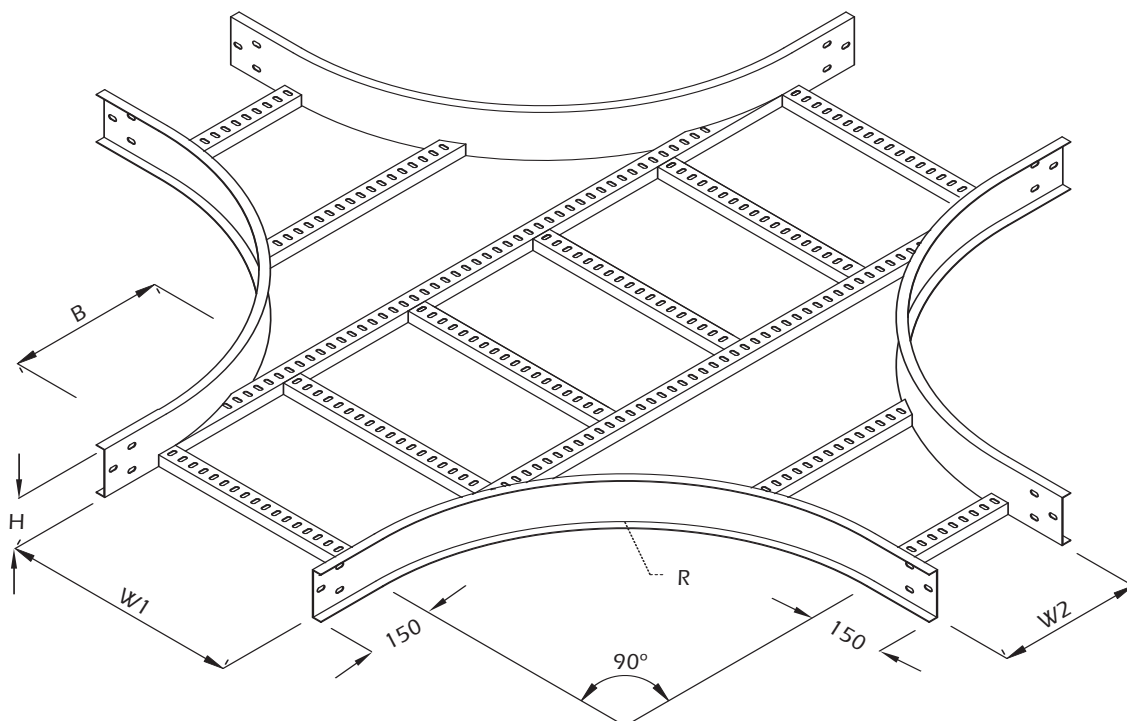

Rung Spacing 300mm

Components Ref.	H	W1	W2	Thickness	R (Radii)	Finish
UL/LC/UC/2-6	50	150	200 to 1000	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LC/UC/2-8	50	200				
UL/LC/UC/2-10	50	250				
UL/LC/UC/2-12	50	300				
UL/LC/UC/3-6	75	150				
UL/LC/UC/3-8	75	200				
UL/LC/UC/3-10	75	250				
UL/LC/UC/3-12	75	300				
UL/LC/UC/4-6	100	150				
UL/LC/UC/4-8	100	200				
UL/LC/UC/4-10	100	250				
UL/LC/UC/4-12	100	300				
UL/LC/UC/4-16	100	400				
UL/LC/UC/4-18	100	450				
UL/LC/UC/4-20	100	500				
UL/LC/UC/4-24	100	600				
UL/LC/UC/4-30	100	750				
UL/LC/UC/4-36	100	900				
UL/LC/UC/4-40	100	1000				
UL/LC/UC/5-8	125	200				

Components Ref.	H	W1	W2	Thickness	R (Radii)	Finish
UL/LC/UC/5-10	125	250	200 to 1000	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LC/UC/5-12	125	300				
UL/LC/UC/5-16	125	400				
UL/LC/UC/5-18	125	450				
UL/LC/UC/5-20	125	500				
UL/LC/UC/5-24	125	600				
UL/LC/UC/5-30	125	750				
UL/LC/UC/5-36	125	900				
UL/LC/UC/5-40	125	1000				
UL/LC/UC/6-8	150	200				
UL/LC/UC/6-10	150	250				
UL/LC/UC/6-12	150	300				
UL/LC/UC/6-16	150	400				
UL/LC/UC/6-18	150	450				
UL/LC/UC/6-20	150	500				
UL/LC/UC/6-24	150	600				
UL/LC/UC/6-30	150	750				
UL/LC/UC/6-32	150	800				
UL/LC/UC/6-36	150	900				
UL/LC/UC/6-40	150	1000				

Dimension in Millimetre


Abbreviation: B - Rung Spacing H - Height R - Radii W - Width

When ordering Material and Finish as straight cable ladder please also indicate Radius and Width (W2).

Steel Cable Ladder

Steel Cable Ladder - External Riser

Type: UL/LC/ER

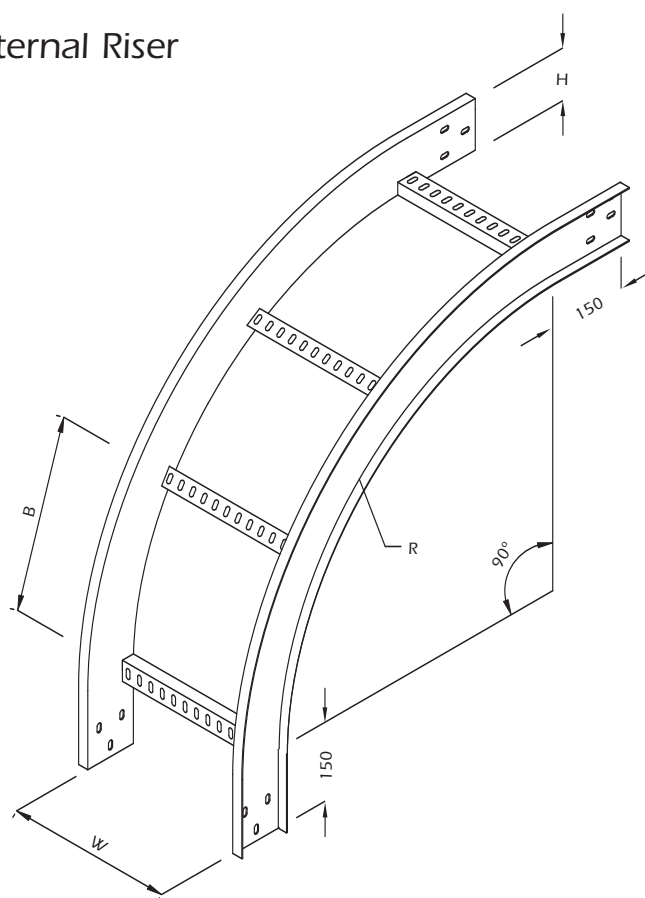

Rung Spacing 300mm

Components Ref.	H	W	Thickness	R (Radii)	Finish
UL/LC/ER/2-6	50	150	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LC/ER/2-8	50	200			
UL/LC/ER/2-10	50	250			
UL/LC/ER/2-12	50	300			
UL/LC/ER/3-6	75	150			
UL/LC/ER/3-8	75	200			
UL/LC/ER/3-10	75	250			
UL/LC/ER/3-12	75	300			
UL/LC/ER/4-6	100	150			
UL/LC/ER/4-8	100	200			
UL/LC/ER/4-10	100	250			
UL/LC/ER/4-12	100	300			
UL/LC/ER/4-16	100	400			
UL/LC/ER/4-18	100	450			
UL/LC/ER/4-20	100	500			
UL/LC/ER/4-24	100	600			
UL/LC/ER/4-30	100	750			
UL/LC/ER/4-36	100	900			
UL/LC/ER/4-40	100	1000			
UL/LC/ER/5-8	125	200			

Components Ref.	H	W	Thickness	R (Radii)	Finish
UL/LC/ER/5-10	125	250	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LC/ER/5-12	125	300			
UL/LC/ER/5-16	125	400			
UL/LC/ER/5-18	125	450			
UL/LC/ER/5-20	125	500			
UL/LC/ER/5-24	125	600			
UL/LC/ER/5-30	125	750			
UL/LC/ER/5-36	125	900			
UL/LC/ER/5-40	125	1000			
UL/LC/ER/6-8	150	200			
UL/LC/ER/6-10	150	250			
UL/LC/ER/6-12	150	300			
UL/LC/ER/6-16	150	400			
UL/LC/ER/6-18	150	450			
UL/LC/ER/6-20	150	500			
UL/LC/ER/6-24	150	600			
UL/LC/ER/6-30	150	750			
UL/LC/ER/6-32	150	800			
UL/LC/ER/6-36	150	900			
UL/LC/ER/6-40	150	1000			

Dimension in Millimetre


Abbreviation: B - Rung Spacing H - Height R - Radii W - Width

When ordering Material and Finish as straight cable ladder please also indicate Radius.

Steel Cable Ladder

Steel Cable Ladder - Internal Riser

Type: UL/LC/IR

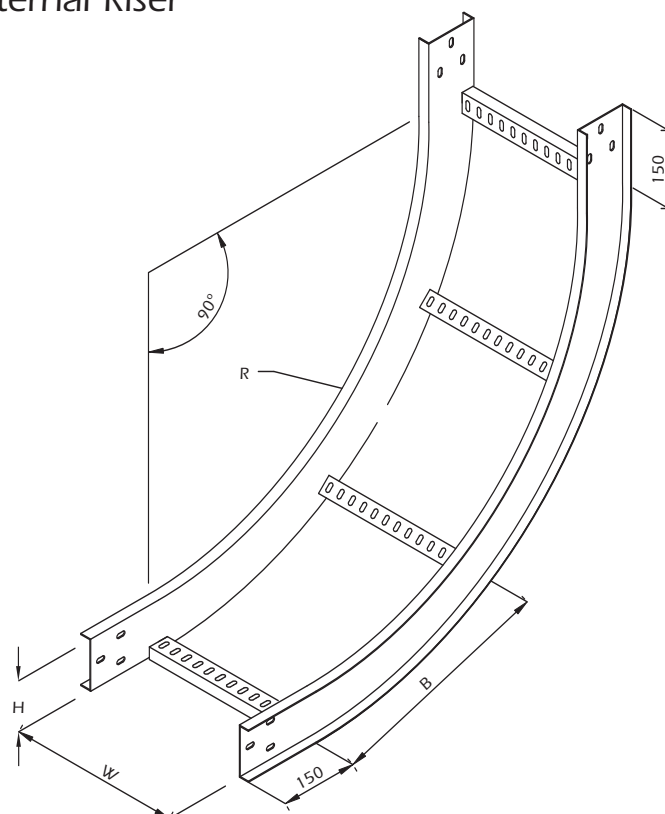

Rung Spacing 300mm

Components Ref.	H	W	Thickness	R (Radii)	Finish
UL/LC/IR/2-6	50	150	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LC/IR/2-8	50	200			
UL/LC/IR/2-10	50	250			
UL/LC/IR/2-12	50	300			
UL/LC/IR/3-6	75	150			
UL/LC/IR/3-8	75	200			
UL/LC/IR/3-10	75	250			
UL/LC/IR/3-12	75	300			
UL/LC/IR/4-6	100	150			
UL/LC/IR/4-8	100	200			
UL/LC/IR/4-10	100	250			
UL/LC/IR/4-12	100	300			
UL/LC/IR/4-16	100	400			
UL/LC/IR/4-18	100	450			
UL/LC/IR/4-20	100	500			
UL/LC/IR/4-24	100	600			
UL/LC/IR/4-30	100	750			
UL/LC/IR/4-36	100	900			
UL/LC/IR/4-40	100	1000			
UL/LC/IR/5-8	125	200			

Components Ref.	H	W	Thickness	R (Radii)	Finish
UL/LC/IR/5-10	125	250	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LC/IR/5-12	125	300			
UL/LC/IR/5-16	125	400			
UL/LC/IR/5-18	125	450			
UL/LC/IR/5-20	125	500			
UL/LC/IR/5-24	125	600			
UL/LC/IR/5-30	125	750			
UL/LC/IR/5-36	125	900			
UL/LC/IR/5-40	125	1000			
UL/LC/IR/6-8	150	200			
UL/LC/IR/6-10	150	250			
UL/LC/IR/6-12	150	300			
UL/LC/IR/6-16	150	400			
UL/LC/IR/6-18	150	450			
UL/LC/IR/6-20	150	500			
UL/LC/IR/6-24	150	600			
UL/LC/IR/6-30	150	750			
UL/LC/IR/6-32	150	800			
UL/LC/IR/6-36	150	900			
UL/LC/IR/6-40	150	1000			

Dimension in Millimetre


Abbreviation: B - Rung Spacing H - Height R - Radii W - Width

When ordering Material and Finish as straight cable ladder please also indicate Radius.

Steel Cable Ladder

Steel Cable Ladder - 90° Vertical Tee

Type: UL/LC/VT90

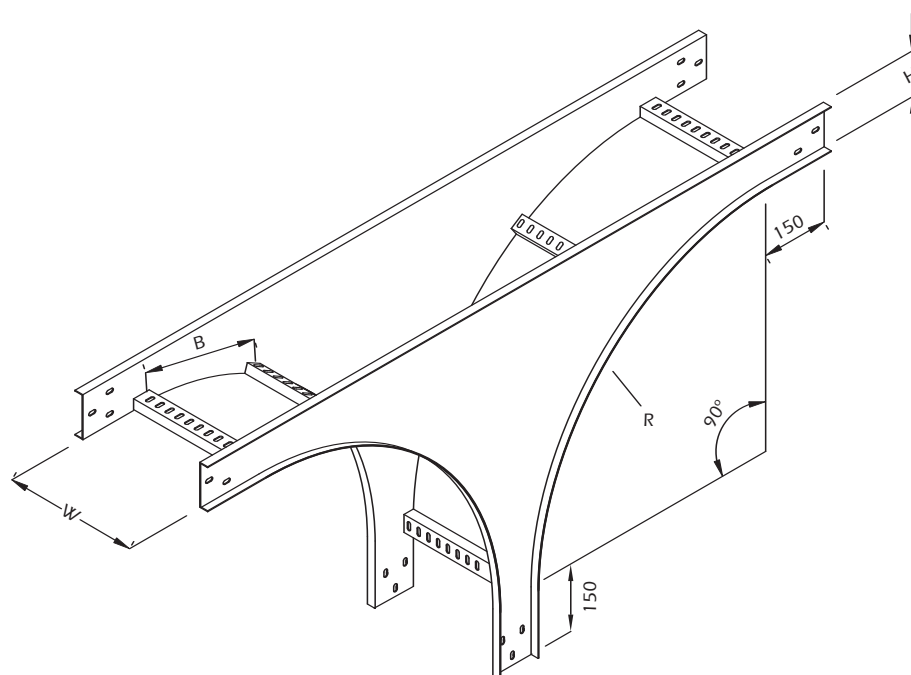

Rung Spacing 300mm

Components Ref.	H	W	Thickness	R (Radii)	Finish
UL/LC/VT90/2-6	50	150	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LC/VT90/2-8	50	200			
UL/LC/VT90/2-10	50	250			
UL/LC/VT90/2-12	50	300			
UL/LC/VT90/3-6	75	150			
UL/LC/VT90/3-8	75	200			
UL/LC/VT90/3-10	75	250			
UL/LC/VT90/3-12	75	300			
UL/LC/VT90/4-6	100	150			
UL/LC/VT90/4-8	100	200			
UL/LC/VT90/4-10	100	250			
UL/LC/VT90/4-12	100	300			
UL/LC/VT90/4-16	100	400			
UL/LC/VT90/4-18	100	450			
UL/LC/VT90/4-20	100	500			
UL/LC/VT90/4-24	100	600			
UL/LC/VT90/4-30	100	750			
UL/LC/VT90/4-36	100	900			
UL/LC/VT90/4-40	100	1000			
UL/LC/VT90/5-8	125	200			

Components Ref.	H	W	Thickness	R (Radii)	Finish
UL/LC/VT90/5-10	125	250	As Straight Cable Ladder	300 to 700 (Standard Radius 450)	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LC/VT90/5-12	125	300			
UL/LC/VT90/5-16	125	400			
UL/LC/VT90/5-18	125	450			
UL/LC/VT90/5-20	125	500			
UL/LC/VT90/5-24	125	600			
UL/LC/VT90/5-30	125	750			
UL/LC/VT90/5-36	125	900			
UL/LC/VT90/5-40	125	1000			
UL/LC/VT90/6-8	150	200			
UL/LC/VT90/6-10	150	250			
UL/LC/VT90/6-12	150	300			
UL/LC/VT90/6-16	150	400			
UL/LC/VT90/6-18	150	450			
UL/LC/VT90/6-20	150	500			
UL/LC/VT90/6-24	150	600			
UL/LC/VT90/6-30	150	750			
UL/LC/VT90/6-32	150	800			
UL/LC/VT90/6-36	150	900			
UL/LC/VT90/6-40	150	1000			

Dimension in Millimetre


Abbreviation: B - Rung Spacing H - Height R - Radii W - Width

When ordering Material and Finish as straight cable ladder please also indicate Radius.

Steel Cable Ladder

Steel Cable Ladder - Left Offset Reducer

Type: UL/LC/LR

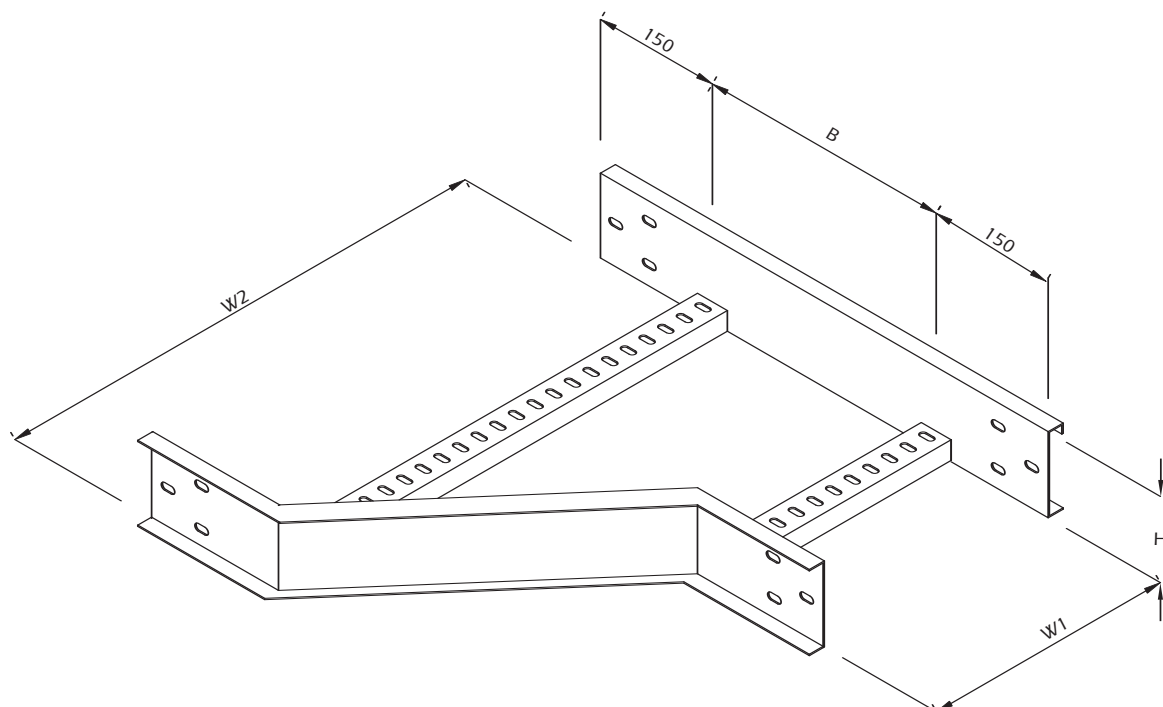

Rung Spacing 300mm

Components Ref.	H	W1	W2	Thickness	Finish
UL/LC/LR/2-6	50	150	200 to 1000	As Straight Cable Ladder	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LC/LR/2-8	50	200			
UL/LC/LR/2-10	50	250			
UL/LC/LR/2-12	50	300			
UL/LC/LR/3-6	75	150			
UL/LC/LR/3-8	75	200			
UL/LC/LR/3-10	75	250			
UL/LC/LR/3-12	75	300			
UL/LC/LR/4-6	100	150			
UL/LC/LR/4-8	100	200			
UL/LC/LR/4-10	100	250			
UL/LC/LR/4-12	100	300			
UL/LC/LR/4-16	100	400			
UL/LC/LR/4-18	100	450			
UL/LC/LR/4-20	100	500			
UL/LC/LR/4-24	100	600			
UL/LC/LR/4-30	100	750			
UL/LC/LR/4-36	100	900			
UL/LC/LR/4-40	100	1000			
UL/LC/LR/5-8	125	200			

Components Ref.	H	W1	W2	Thickness	Finish
UL/LC/LR/5-10	125	250	200 to 1000	As Straight Cable Ladder	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LC/LR/5-12	125	300			
UL/LC/LR/5-16	125	400			
UL/LC/LR/5-18	125	450			
UL/LC/LR/5-20	125	500			
UL/LC/LR/5-24	125	600			
UL/LC/LR/5-30	125	750			
UL/LC/LR/5-36	125	900			
UL/LC/LR/5-40	125	1000			
UL/LC/LR/6-8	150	200			
UL/LC/LR/6-10	150	250			
UL/LC/LR/6-12	150	300			
UL/LC/LR/6-16	150	400			
UL/LC/LR/6-18	150	450			
UL/LC/LR/6-20	150	500			
UL/LC/LR/6-24	150	600			
UL/LC/LR/6-30	150	750			
UL/LC/LR/6-32	150	800			
UL/LC/LR/6-36	150	900			
UL/LC/LR/6-40	150	1000			

Dimension in Millimetre


Abbreviation: B - Rung Spacing H - Height W - Width

When ordering Material and Finish as straight cable ladder please also indicate Width (W2).

Steel Cable Ladder

Steel Cable Ladder - Right Offset Reducer

Type: UL/LC/RR

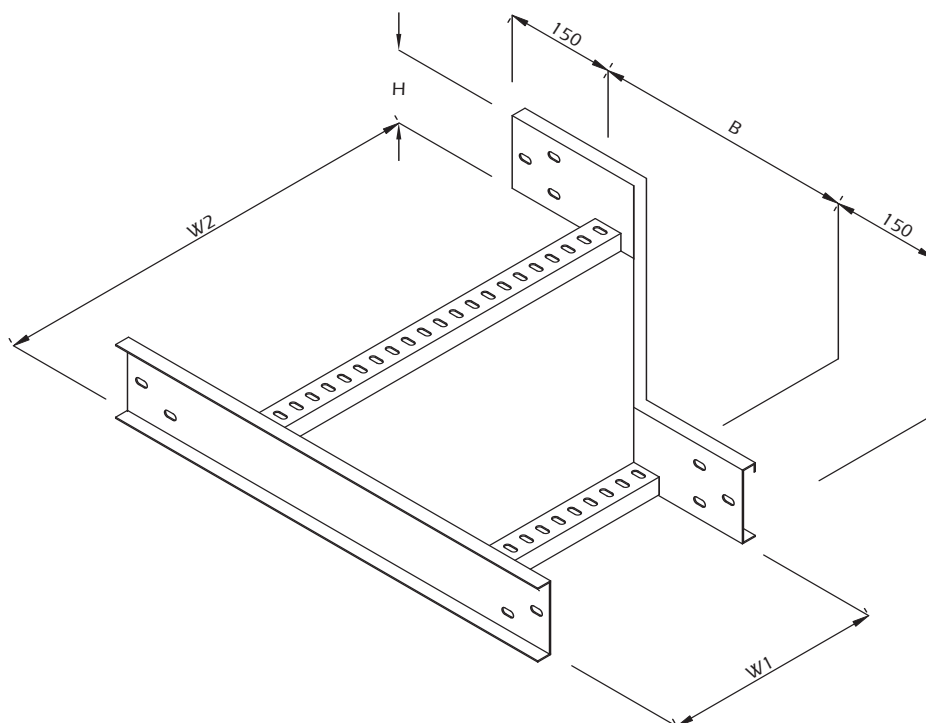

Rung Spacing 300mm

Components Ref.	H	W1	W2	Thickness	Finish
UL/LC/RR/2-6	50	150	200 to 1000	As Straight Cable Ladder	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LC/RR/2-8	50	200			
UL/LC/RR/2-10	50	250			
UL/LC/RR/2-12	50	300			
UL/LC/RR/3-6	75	150			
UL/LC/RR/3-8	75	200			
UL/LC/RR/3-10	75	250			
UL/LC/RR/3-12	75	300			
UL/LC/RR/4-6	100	150			
UL/LC/RR/4-8	100	200			
UL/LC/RR/4-10	100	250			
UL/LC/RR/4-12	100	300			
UL/LC/RR/4-16	100	400			
UL/LC/RR/4-18	100	450			
UL/LC/RR/4-20	100	500			
UL/LC/RR/4-24	100	600			
UL/LC/RR/4-30	100	750			
UL/LC/RR/4-36	100	900			
UL/LC/RR/4-40	100	1000			
UL/LC/RR/5-8	125	200			

Components Ref.	H	W1	W2	Thickness	Finish
UL/LC/RR/5-10	125	250	200 to 1000	As Straight Cable Ladder	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LC/RR/5-12	125	300			
UL/LC/RR/5-16	125	400			
UL/LC/RR/5-18	125	450			
UL/LC/RR/5-20	125	500			
UL/LC/RR/5-24	125	600			
UL/LC/RR/5-30	125	750			
UL/LC/RR/5-36	125	900			
UL/LC/RR/5-40	125	1000			
UL/LC/RR/6-8	150	200			
UL/LC/RR/6-10	150	250			
UL/LC/RR/6-12	150	300			
UL/LC/RR/6-16	150	400			
UL/LC/RR/6-18	150	450			
UL/LC/RR/6-20	150	500			
UL/LC/RR/6-24	150	600			
UL/LC/RR/6-30	150	750			
UL/LC/RR/6-32	150	800			
UL/LC/RR/6-36	150	900			
UL/LC/RR/6-40	150	1000			

Dimension in Millimetre


Abbreviation: B - Rung Spacing H - Height W - Width

When ordering Material and Finish as straight cable ladder please also indicate Width (W2).

Steel Cable Ladder

Steel Cable Ladder - Straight Offset Reducer

Type: UL/LC/SR

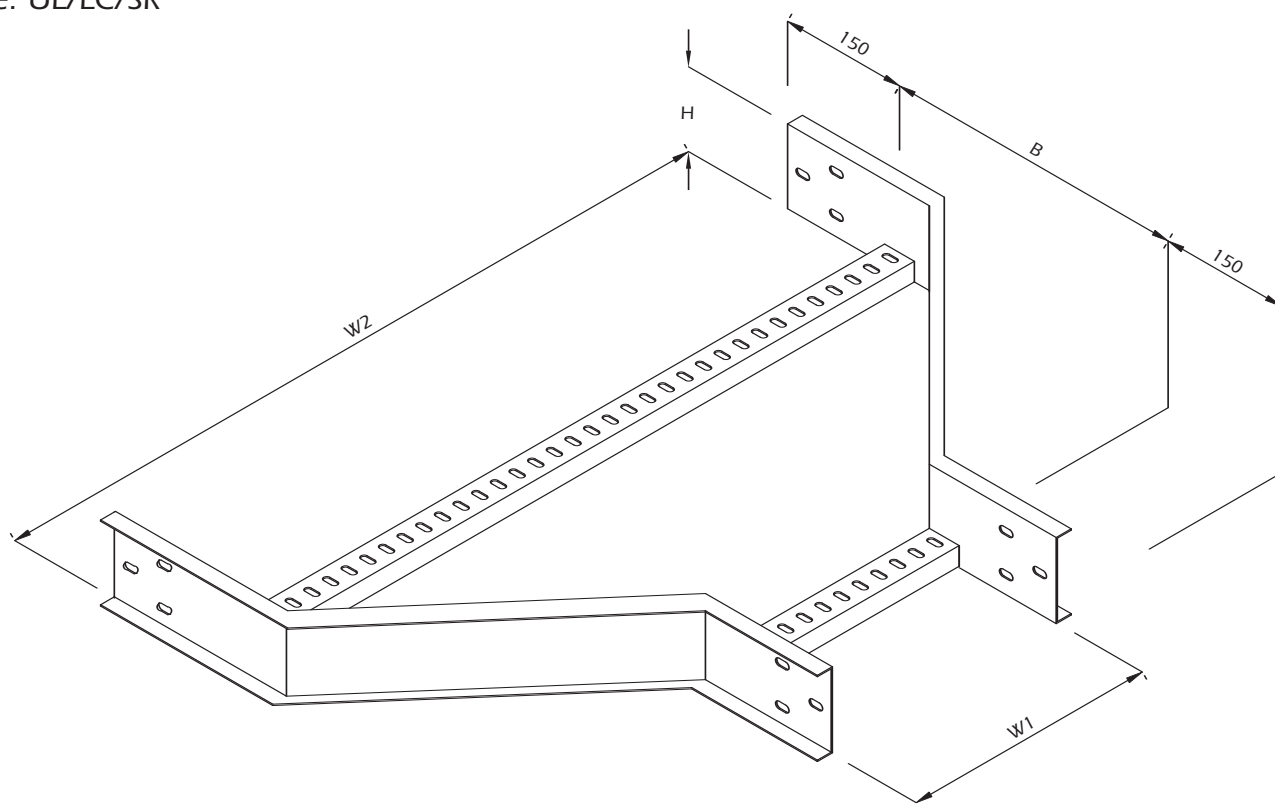

Rung Spacing 300mm

Components Ref.	H	W1	W2	Thickness	Finish
UL/LC/SR/2-6	50	150	200 to 1000	As Straight Cable Ladder	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LC/SR/2-8	50	200			
UL/LC/SR/2-10	50	250			
UL/LC/SR/2-12	50	300			
UL/LC/SR/3-6	75	150			
UL/LC/SR/3-8	75	200			
UL/LC/SR/3-10	75	250			
UL/LC/SR/3-12	75	300			
UL/LC/SR/4-6	100	150			
UL/LC/SR/4-8	100	200			
UL/LC/SR/4-10	100	250			
UL/LC/SR/4-12	100	300			
UL/LC/SR/4-16	100	400			
UL/LC/SR/4-18	100	450			
UL/LC/SR/4-20	100	500			
UL/LC/SR/4-24	100	600			
UL/LC/SR/4-30	100	750			
UL/LC/SR/4-36	100	900			
UL/LC/SR/4-40	100	1000			
UL/LC/SR/5-8	125	200			

Components Ref.	H	W1	W2	Thickness	Finish
UL/LC/SR/5-10	125	250	200 to 1000	As Straight Cable Ladder	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LC/SR/5-12	125	300			
UL/LC/SR/5-16	125	400			
UL/LC/SR/5-18	125	450			
UL/LC/SR/5-20	125	500			
UL/LC/SR/5-24	125	600			
UL/LC/SR/5-30	125	750			
UL/LC/SR/5-36	125	900			
UL/LC/SR/5-40	125	1000			
UL/LC/SR/6-8	150	200			
UL/LC/SR/6-10	150	250			
UL/LC/SR/6-12	150	300			
UL/LC/SR/6-16	150	400			
UL/LC/SR/6-18	150	450			
UL/LC/SR/6-20	150	500			
UL/LC/SR/6-24	150	600			
UL/LC/SR/6-30	150	750			
UL/LC/SR/6-32	150	800			
UL/LC/SR/6-36	150	900			
UL/LC/SR/6-40	150	1000			

Dimension in Millimetre


Abbreviation: B - Rung Spacing H - Height W - Width

When ordering Material and Finish as straight cable ladder please also indicate Width (W2).

Steel Cable Ladder

Steel Cable Ladder - Straight Divider

Type: UL/LC/SD

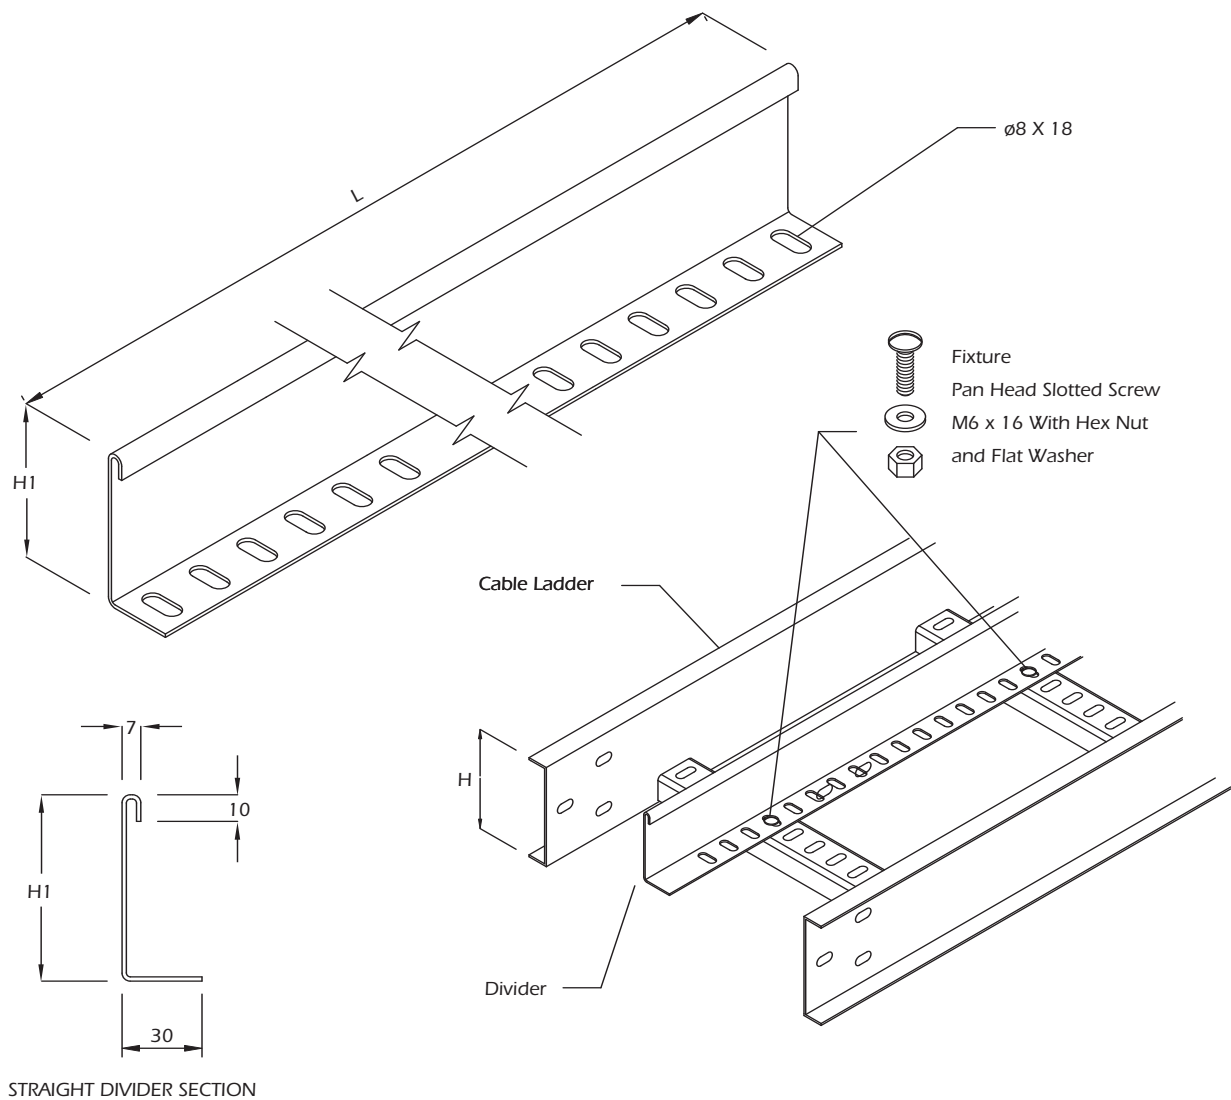

Components Ref.	H	H1	Thickness	L	Finish
UL/LC/SD-2	50	20	1.5	1500 or 3000	Hot Dip Galvanised Epoxy or Polyester Coated - Stainless
UL/LC/SD-3	75	45	1.5		
UL/LC/SD-4	100	70	2.0		
UL/LC/SD-4	100	70	2.0		
UL/LC/SD-5	125	95	2.0		
UL/LC/SD-6	150	120	2.0		


Dimension in Millimetre
Abbreviation: H - Height L - Length

When ordering Material and Finish as straight cable ladder please also indicate Length (L).

Steel Cable Ladder

Steel Cable Ladder - Straight Cover

Type: UL/LC/SC

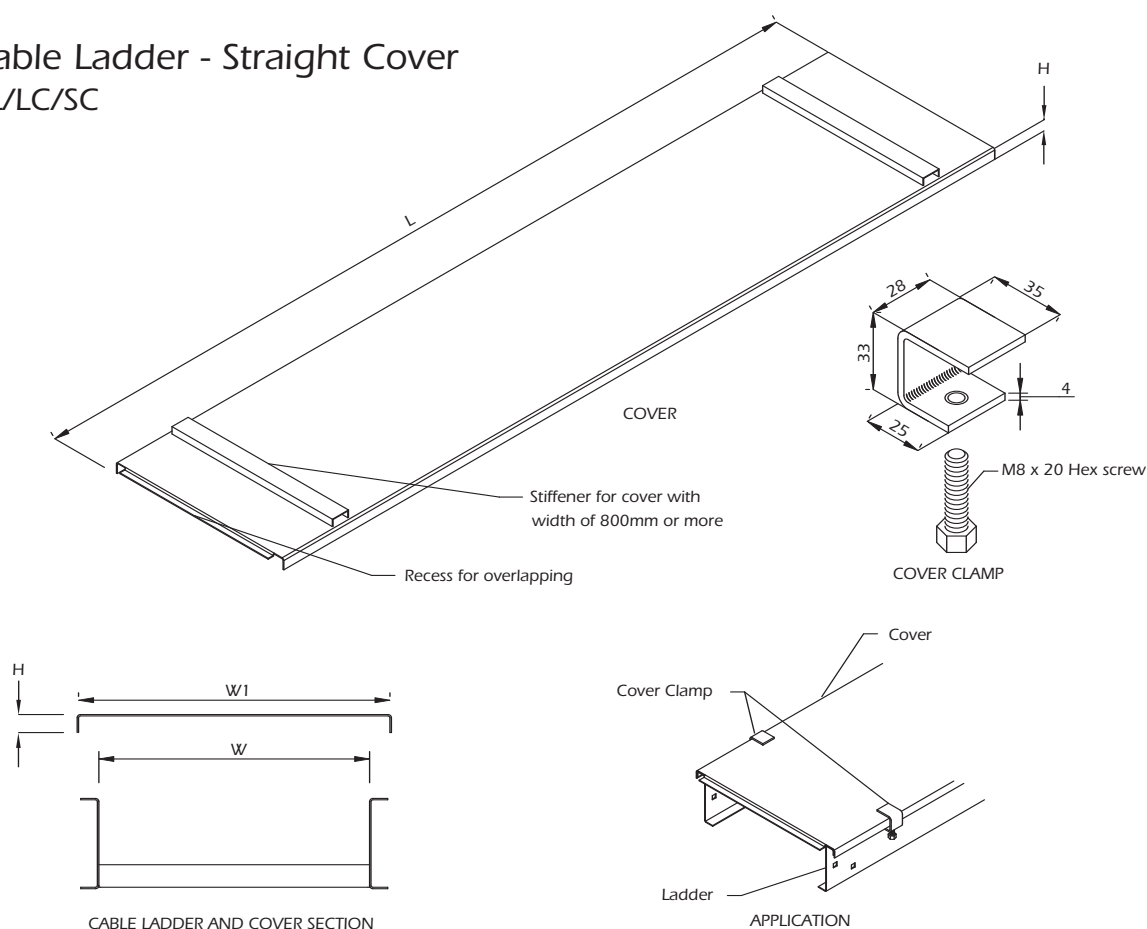

Components Ref.	H	W	W1	Thickness	L	Finish
UL/LC/SC-1	16	150	195	1.5	1500 or 3000	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LC/SC-2	16	200	245	1.5		
UL/LC/SC-3	16	250	295	1.5		
UL/LC/SC-4	16	300	345	1.5		
UL/LC/SC-5	16	150	195	1.5		
UL/LC/SC-6	16	200	245	1.5		
UL/LC/SC-7	16	250	295	1.5		
UL/LC/SC-8	16	300	345	1.5		
UL/LC/SC-9	16	150	195	2.0		
UL/LC/SC-10	16	200	245	2.0		
UL/LC/SC-11	16	250	295	2.0		
UL/LC/SC-12	16	300	345	2.0		
UL/LC/SC-13	16	400	445	2.0		
UL/LC/SC-14	16	450	495	2.0		
UL/LC/SC-15	16	500	545	2.0		
UL/LC/SC-16	16	600	645	2.0		
UL/LC/SC-17	16	750	795	2.0		
UL/LC/SC-18	16	900	945	2.0		
UL/LC/SC-19	16	1000	1045	2.0		
UL/LC/SC-20	16	200	245	2.0		

Components Ref.	H	W	W1	Thickness	L	Finish
UL/LC/SC-21	16	250	295	2.0	1500 or 3000	Hot Dip Galvanised - Epoxy or Polyester Coated - Stainless
UL/LC/SC-22	16	300	345	2.0		
UL/LC/SC-23	16	400	445	2.0		
UL/LC/SC-24	16	450	495	2.0		
UL/LC/SC-25	16	500	545	2.0		
UL/LC/SC-26	16	600	645	2.0		
UL/LC/SC-27	16	750	795	2.0		
UL/LC/SC-28	16	900	945	2.0		
UL/LC/SC-29	16	1000	1045	2.0		
UL/LC/SC-30	16	200	245	2.0		
UL/LC/SC-31	16	250	295	2.0		
UL/LC/SC-32	16	300	345	2.0		
UL/LC/SC-33	16	400	445	2.0		
UL/LC/SC-34	16	450	495	2.0		
UL/LC/SC-35	16	500	545	2.0		
UL/LC/SC-36	16	600	645	2.0		
UL/LC/SC-37	16	750	795	2.0		
UL/LC/SC-38	16	800	845	2.0		
UL/LC/SC-39	16	900	945	2.0		
UL/LC/SC-40	16	1000	1045	2.0		

Components Ref.	Description
UL/LZ/CMP	Cable Ladder Cover Clamp

Dimension in Millimetre


Abbreviation: H - Height L - Length W - Width

When ordering Material and Finish as straight cable ladder please also indicate Length (L).


Steel Cable Ladder

Steel Cable Ladder - Horizontal Splice Plate

Type: UL/LC/HS-6

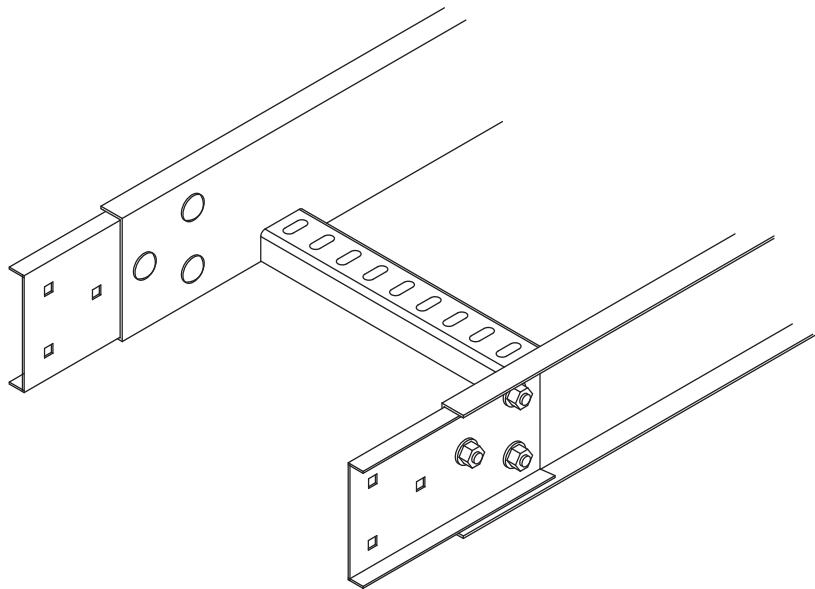

Application

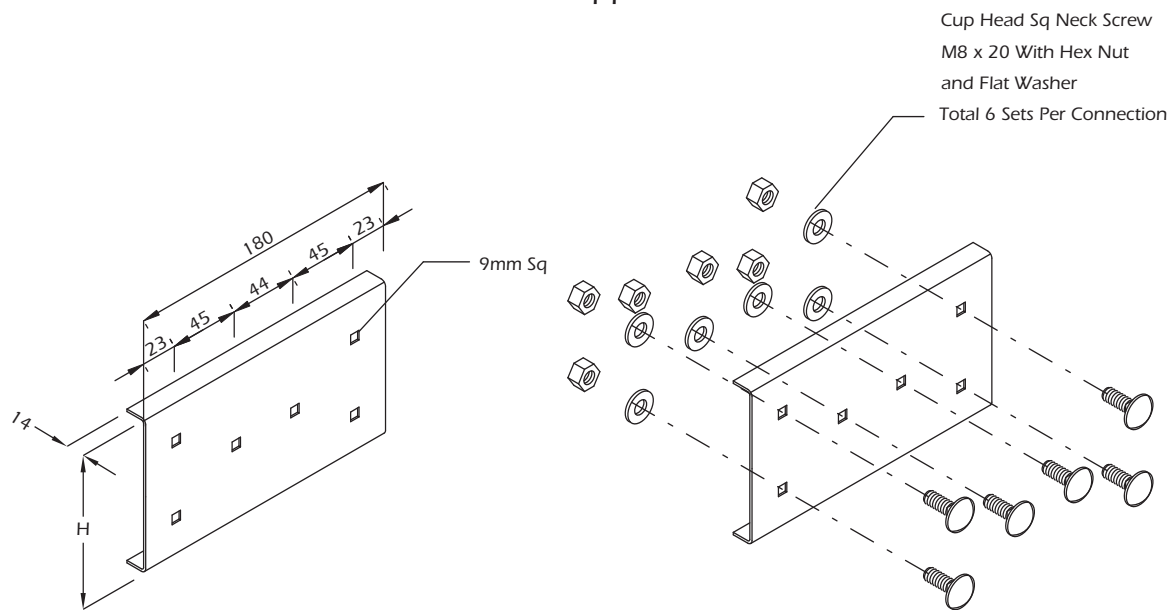

Splice Plate and Fixture

Components Ref.	H	Description	Finish
UL/LC/HS-6-4	100	Horizontal Splice Plate with Fixture For 100mm - 125mm - 150mm Height Cable Ladder	Hot Dip Galvanised Epoxy or Polyester Coated Stainless
UL/LC/HS-6-5	125		
UL/LC/HS-6-6	150		


Dimension in Millimetre
Abbreviation: H - Height

Material and Finish as straight cable ladder.


Steel Cable Ladder

Steel Cable Ladder - Horizontal Splice Plate

Type: UL/LC/HS-4

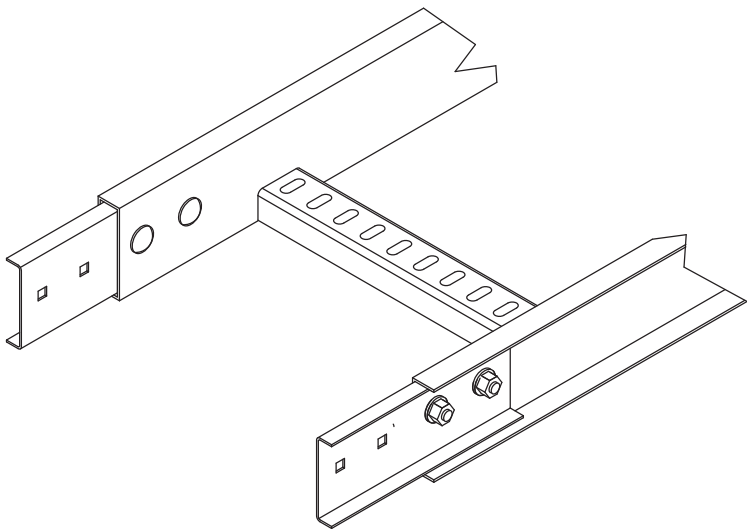

Application

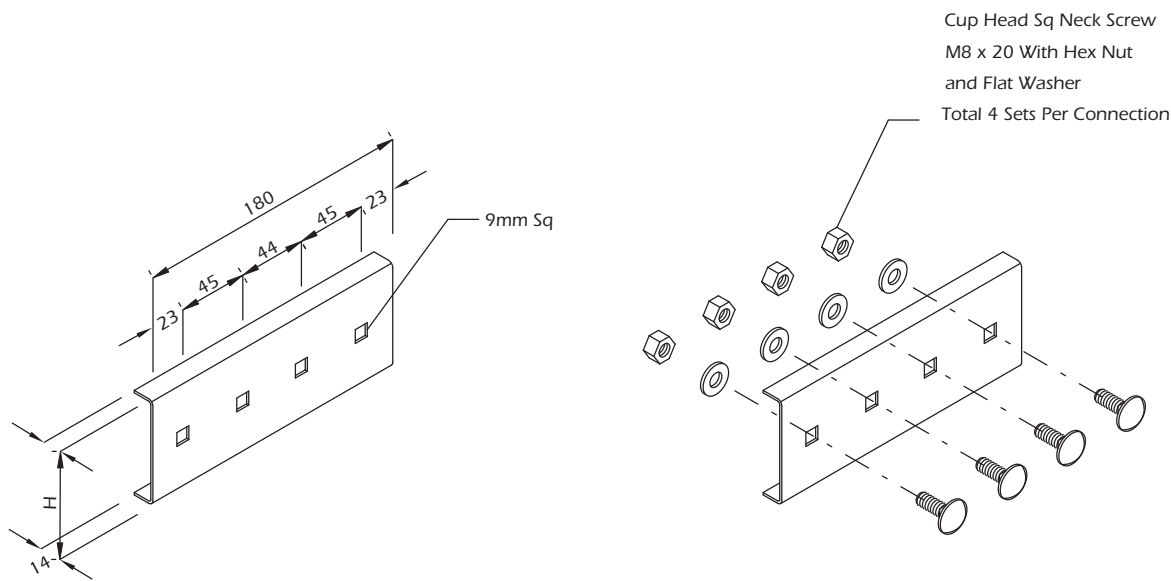

Splice Plate and Fixture

Components Ref.	Cable Ladder Height	Description	Finish
UL/LC/HS-4-2	50	To Fit Cable Ladder with 2mm Clearance	Hot Dip Galvanised Epoxy or Polyester Coated Stainless
UL/LC/HS-4-3	75		


Dimension in Millimetre
Abbreviation: H - Height

Material and Finish as straight cable ladder.


Steel Cable Ladder

Steel Cable Ladder - Vertical Adjustable Splice Plate

Type: UL/LC/VAS-6

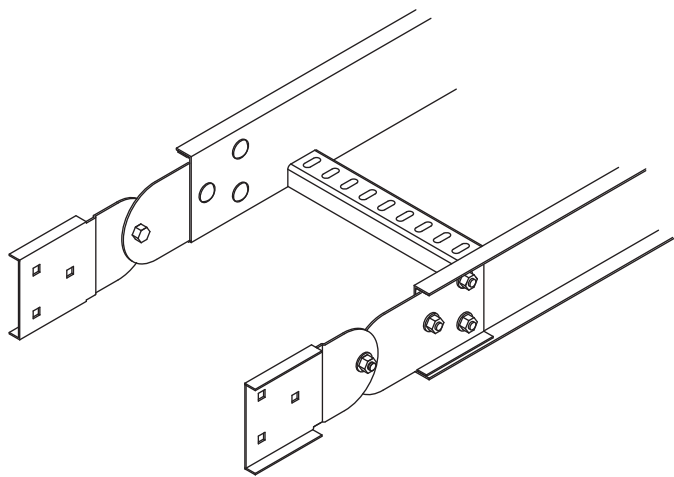

Application

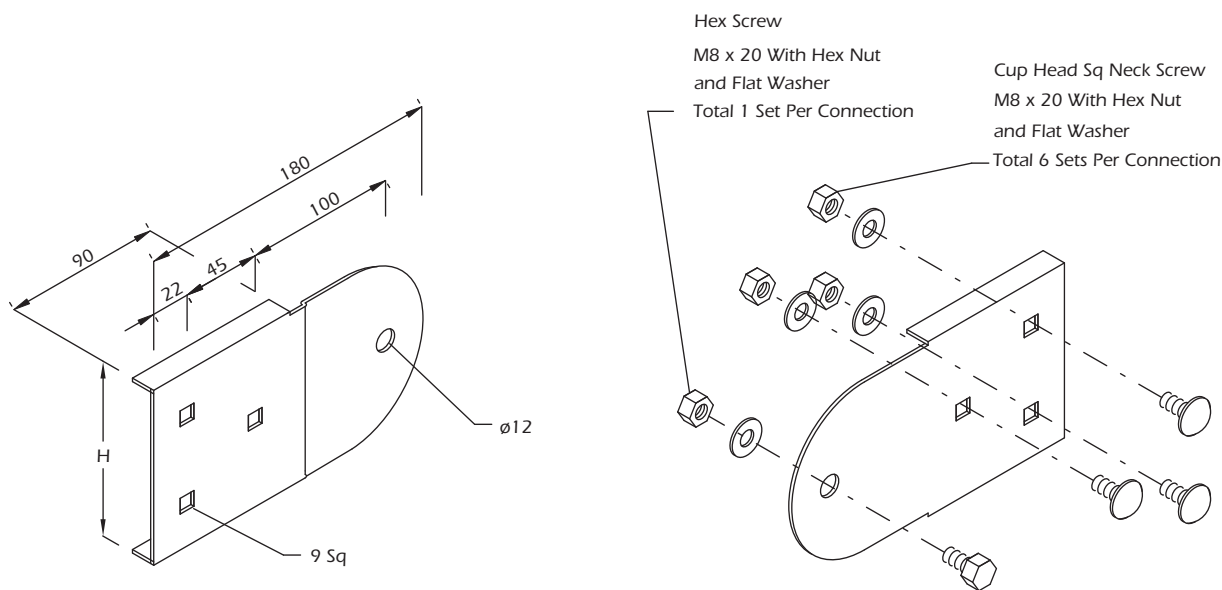

Splice Plate and Fixture

Components Ref.	Cable Ladder Height	H	Finish
UL/LC/VAS-6-4	100	To Fit Cable Ladder with 2mm Clearance	Hot Dip Galvanised Epoxy or Polyester Coated Stainless
UL/LC/VAS-6-5	125		
UL/LC/VAS-6-6	150		


Dimension in Millimetre
Abbreviation: H - Height

Material and Finish as straight cable ladder.


Steel Cable Ladder

Steel Cable Ladder - Vertical Adjustable Splice Plate

Type: UL/LC/VAS-4

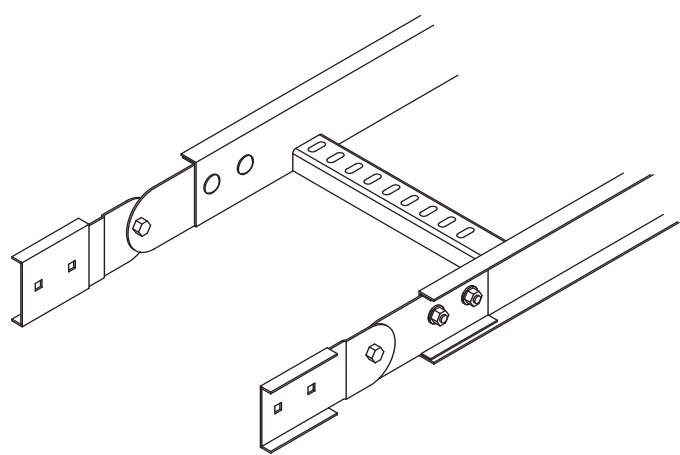

Application

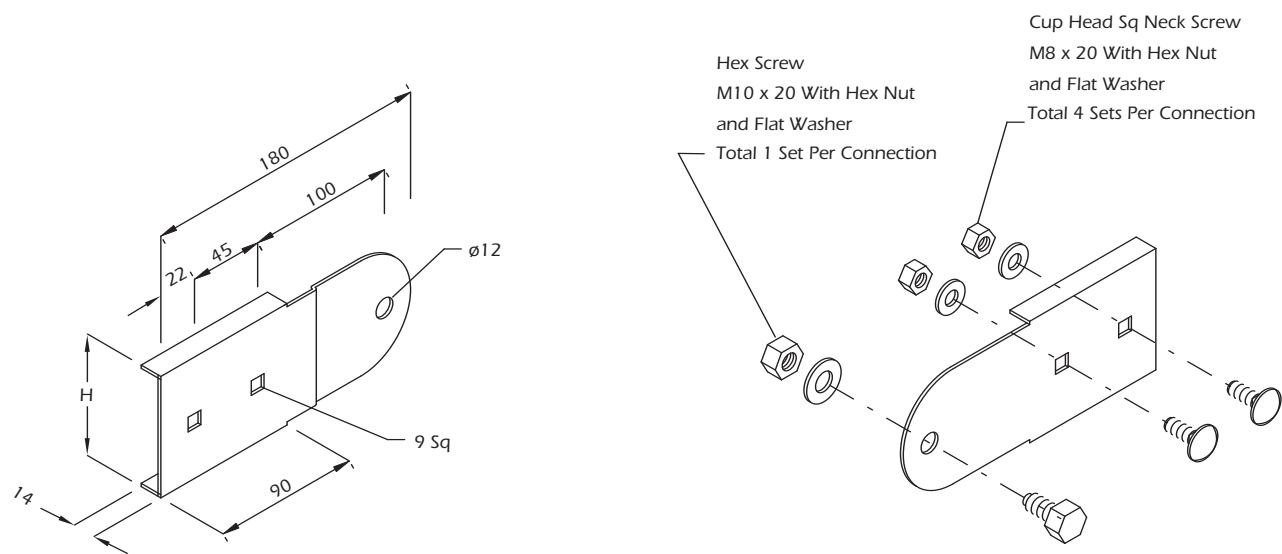

Splice Plate and Fixture

Components Ref.	Cable Ladder Height	H	Finish
UL/LC/VAS-4-2	50	To Fit Cable Ladder with 2mm Clearance	Hot Dip Galvanised Epoxy or Polyester Coated Stainless
UL/LC/VAS-4-3	75		


Dimension in Millimetre
Abbreviation: H - Height

Material and Finish as straight cable ladder.


Steel Cable Ladder

Steel Cable Ladder - Horizontal Adjustable Splice Plate

Type: UL/LC/HAS-6

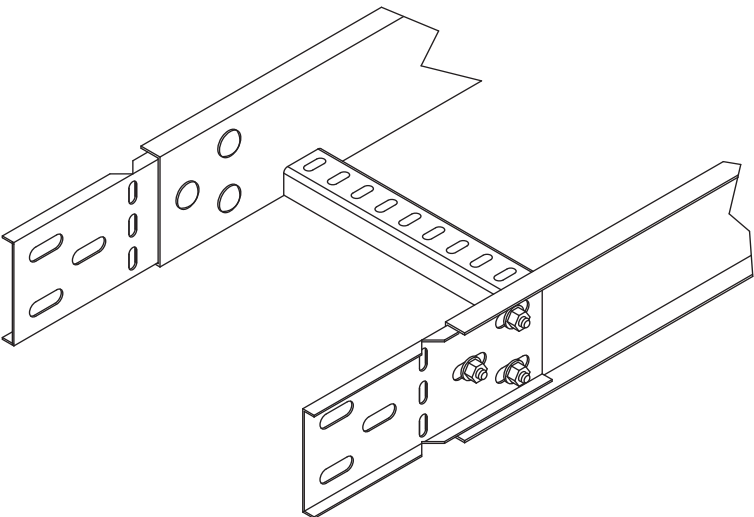

Application

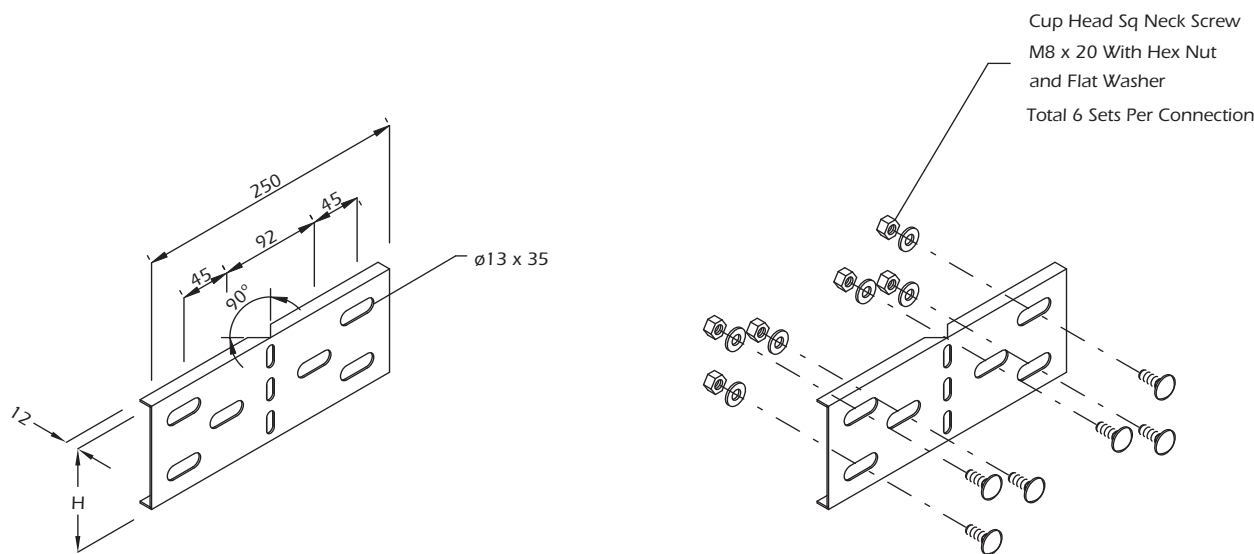

Splice Plate and Fixture

Components Ref.	Cable Ladder Height	H	Finish
UL/LC/HAS-6-4	100	To Fit Cable Ladder with 2mm Clearance	Hot Dip Galvanised Epoxy or Polyester Coated Stainless
UL/LC/HAS-6-5	125		
UL/LC/HAS-6-6	150		


Dimension in Millimetre
Abbreviation: H - Height

Material and Finish as straight cable ladder.


Steel Cable Ladder

Steel Cable Ladder - Horizontal Adjustable Splice Plate

Type: UL/LC/HAS-4

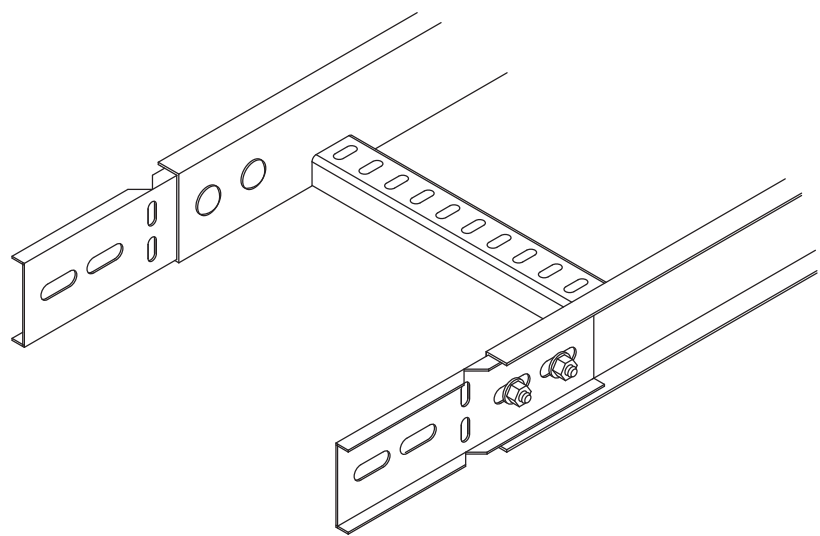

Application

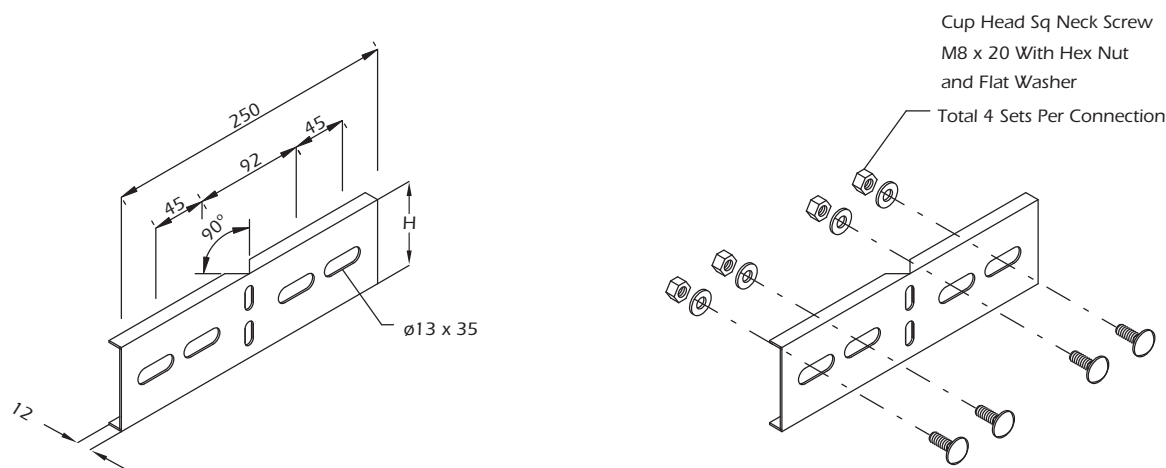

Splice Plate and Fixture

Components Ref.	Cable Ladder Height	H	Finish
UL/LC/HAS-4-2	50	To Fit Cable Ladder with 2mm Clearance	Hot Dip Galvanised Epoxy or Polyester Coated Stainless
UL/LC/HAS-4-3	75		


Dimension in Millimetre
Abbreviation: H - Height

Material and Finish as straight cable ladder.

Steel Cable Ladder

Steel Cable Ladder - End Plate

Type: UL/LC/EP-6

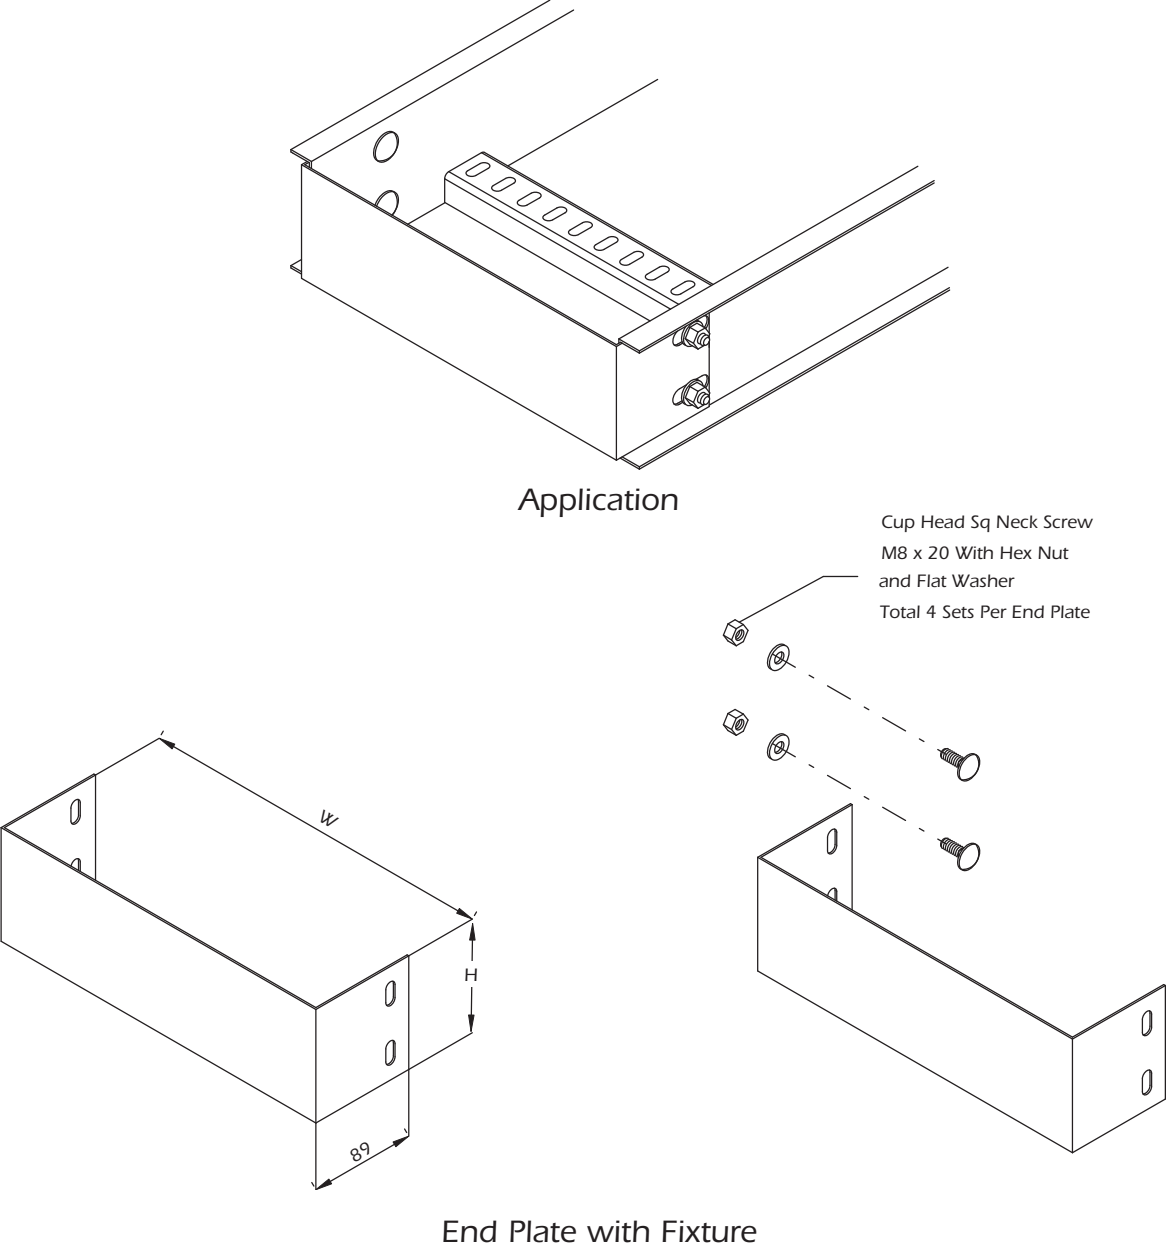

Components Ref.	Cable Ladder Height	H	Finish
UL/LC/EP-6-4	100	To Fit Cable Ladder with 2mm Clearance	Hot Dip Galvanised Epoxy or Polyester Coated Stainless
UL/LC/EP-6-5	125		
UL/LC/EP-6-6	150		


Dimension in Millimetre
Abbreviation: H - Height W - Width

Material and Finish as straight cable ladder.


Steel Cable Ladder

Steel Cable Ladder - End Plate

Type: UL/LC/EP-4

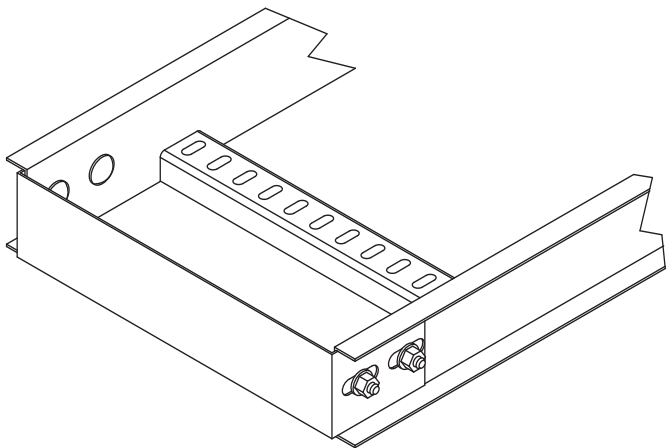

Application

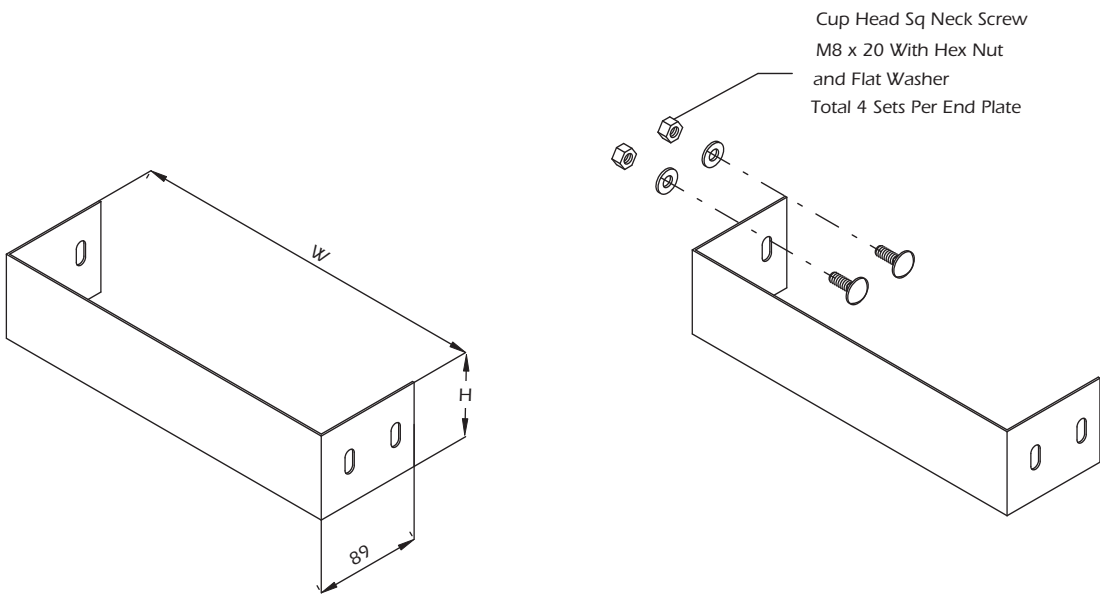

End Plate with Fixture


Components Ref.	Cable Ladder Height	H	Finish
UL/LC/EP-4-2	50	To Fit Cable Ladder with 2mm Clearance	Hot Dip Galvanised Epoxy or Polyester Coated Stainless
UL/LC/EP-4-3	75		

Dimension in Millimetre
Abbreviation: H - Height W - Width


Material and Finish as straight cable ladder.

Steel Cable Ladder

Steel Cable Ladder - Hold Down Clamp Type: UL/L-CP

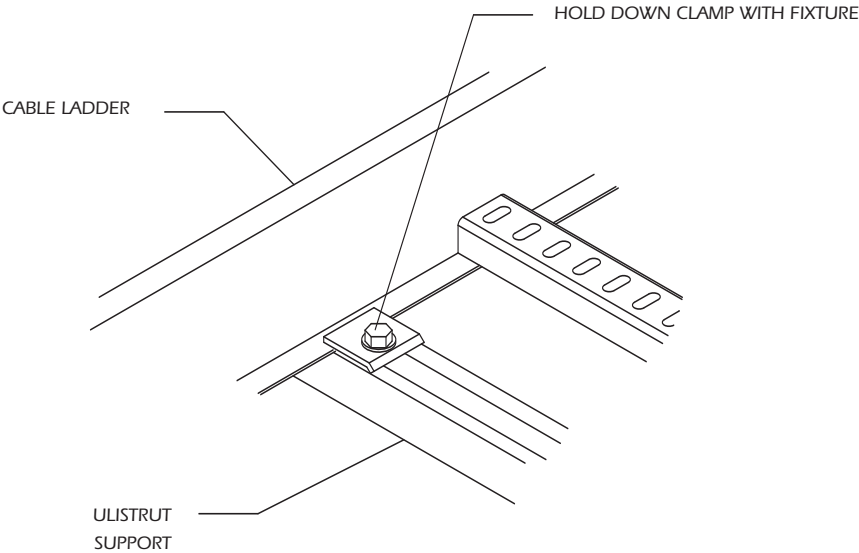

Application

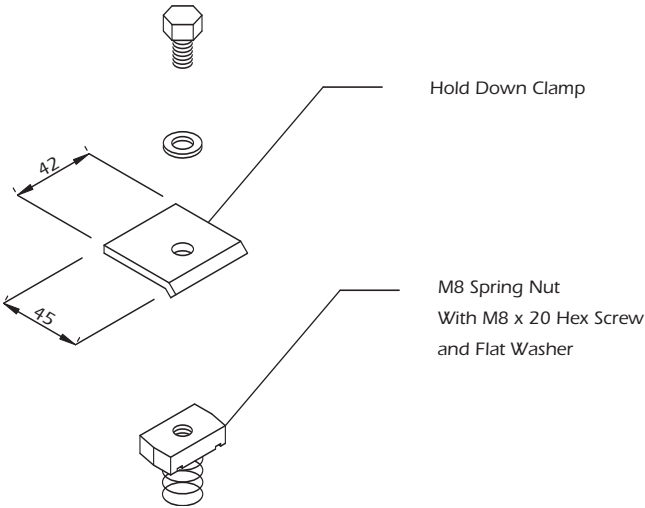

Clamp and Fixture

Components Ref.	Description	Thickness	Finish
UL/L-CP	Hold Down Clamp	4mm	Hot Dip Galvanised Epoxy or Polyester Coated Stainless

Dimension in Millimetre

When ordering please indicate Materail and Finish.

United U-LI Corporation Berhad (Co.No.510737-H)

No. 33, Jalan Kartunis U1/47, Temasya Industrial Park,
Seksyen U1, 40150 Shah Alam,
Selangor Darul Ehsan, Malaysia.

Tel: 603-5569 5999 Fax: 603-5569 1666

Website: www.uli.com.my

Email: hq@uli.com.my

