



MEGAPOWER GROUP

SINCE 1990



WIREMAN[®]

Our Group

Megapower was incorporated in Malaysia in 1990 as a supplier of PVC cable management system and wiring accessories. By continuous expansion, Megapower is now well equipped with its in-house facilities for plastic extrusion and injection, which include tooling, testing and production technologies such as compounding, on-line and off-line finishing, down-stream engineering and packaging.

Megapower is currently occupying a premise on a 200,000 sq. ft. land area with a built up area of 160,000 sq. ft., which consist of its corporate office, manufacturing plant, and warehouse.

Our Marketing

Megapower is successful in expanding its sales and marketing network throughout Malaysia and also the Asia Region with its own house brand, **SAGA** (Heavy Duty), **PVC-LINK** (Heavy Duty), **TND** (Heavy Duty), **WIREMAN** (Medium Duty), **MEGA** (Medium Duty), **MP** (Medium Duty), **CYBER** (Light Duty) and **HERO** (Light Duty).

Megapower also caters to **OEM** customers with customer's brands specifications in the Middle East, South East Asia, Australia and Europe.

Apart from its own products, Megapower is also the sole and exclusive distributor for various well known brand of imported and local electrical products.



Our Mission


Megapower aims to be a one-stop center in Non-metallic (Plastic) electrical cable management systems and wiring accessories. Megapower main concerns are in COST EFFECTIVENESS, EFFICIENCY and most importantly, QUALITY.

Our Quality Achievements

- **SIRIM Certified**
 - Quality Assurance Scheme Licensee
- **JKR Approved**
 - Product approval for PVC Conduits and Fittings.



High Impact Rigid Conduit

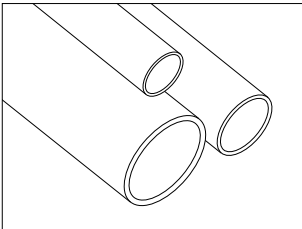

Ref.No.	Size mm
W M20	20
W M25	25
W M32	32
W M40	40
W M50	50
Colour : White / Orange / Black	
Length : 2.9m	

WIREMAN® High Impact

uPVC Conduit is manufactured from specially formulated high impact polyvinyl chloride in strict accordance to meet the requirement of BS EN 50086-2-1:1996, BS EN 61386-2-1:2004 and IEC 61386-2-1:2002 (Medium Duty 332112)




Certified:



Product Certification Licence.

Corrugated Conduit

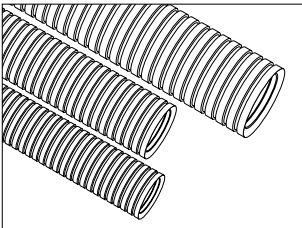


Ref.No.	Size mm
WCC 7	7*
WCC 10	10*
WCC 16	16
WCC 20	20
WCC 25	25
WCC 32	32
WCC 40	40*
WCC 50	50*
Colour : White / Black	
Black only*	

WIREMAN® Corrugated

Conduit is produced from specially formulated excellent thermoplastic material to provide the highest flexibility.

Corrugated Conduit Adaptor


(Screw Type)



Ref.No.	Size mm
WCCA 20	20
WCCA 25	25
Colour : White / Black	


Corrugated Conduit Adaptor

(Clip Type)



Ref.No.	Size mm
WCCA-C 20	20
WCCA-C 25	25
Colour : White / Orange / Black	


Corrugated & Conduit Connector



Ref.No.	Size mm
WCCC 20	20
WCCC 25	25
Colour : White / Black	




Terminal One Way Box




Ref.No.	Size mm	Diameter mm
WCB 20-1	20	65
WCB 25-1	25	65
Colour : White / Black		

Through Two Way Box




Ref.No.	Size mm	Diameter mm
WCB 20-2	20	65
WCB 25-2	25	65
Colour : White / Black		

Angle Two Way Box




Ref.No.	Size mm	Diameter mm
WCB 20-2A	20	65
WCB 25-2A	25	65
Colour : White / Black		

Tee Three Way Box




Ref.No.	Size mm	Diameter mm
WCB 20-3	20	65
WCB 25-3	25	65
Colour : White / Black		

Intersection Four Way Box




Ref.No.	Size mm	Diameter mm
WCB 20-4	20	65
WCB 25-4	25	65
Colour : White / Black		

Loop In Box



Ref.No.	Size mm	Diameter mm
WCLIB	20	65
Colour : White / Black		


Extension Ring



Ref.No.	Height mm	Diameter mm
WER 66L	25	65
WER 66H	38	65
Colour : White / Black		

Lid Cover


(Screw Type)



Ref.No.	Size mm	Diameter mm
WLC	20 & 25	65
Colour : White / Black		


Protector Cover

(Clip Type)




Ref.No.	Size mm	Diameter mm
WPC	20 & 25	65
Colour : White / Black		

Inspection Tee




Ref.No.	Size mm
WIT 20	20
WIT 25	25
Colour : White / Black	

Inspection Elbow




Ref.No.	Size mm
WIE 20	20
WIE 25	25
Colour : White / Black	

Inspection Bend




Ref.No.	Size mm
WIB 20	20
WIB 25	25
Colour : White / Black	

Coupling




Ref.No.	Size mm
WC 20	20
WC 25	25
Colour : White / Black	

Female Adaptor



Ref.No.	Size mm
WFA 20	20
WFA 25	25
Colour : White / Black	


Reducer



Ref.No.	Size mm
WR 20	25-20
Colour : White / Black	




Spring Clip Saddle




Ref.No.	Size mm
WSCS 20	20
WSCS 25	25
Colour : White / Black	

Bar Saddle




Ref.No.	Size mm
WBS 20	20
WBS 25	25
Colour : White / Black	

Blank Plate




Ref.No.	Size
WBP-S1	1 Gang
WBP-1	1Gang
WBP-2	2Gang
Colour : White	

Concealed Box




Ref.No.	Size
WKOB-1	1Gang
WKOB-2	2Gang
WKOB-3	2x1Gang
Colour : White / Black	

Wire Puller




Ref.No.	Length m	Diameter mm
WWP 4015	15	4.0
WWP 4030	30	4.0
WWP 4550	50	4.5
WWP 45100	100	4.5
Colour : White / Orange		

FM Type Cable Marker




Ref.No.	Marking	Cable Dia-mm
WFM 1	A - Z	3.5 - 7.0
	0 - 9	
	+ - /	
Colour : Yellow		
Coil : 500 pcs		

Cable Tie Mount




Ref.No.	W x L mm
WCTM19	19 x 19
WCTM28	28 x 28
Colour : White / Black	

Concealed Box




Ref.No.	Size
WKOB-1A	1Gang
Colour : White / Black	

Weatherproof Cable PG Gland IP68




Ref.No.	Cable Diameter mm	Mounting Hole mm
WPG-7	3 - 6.5	13
WPG-9	4 - 8	16
WPG-11	5 - 10	19
WPG-13.5	6 - 12	20
WPG-16	10 - 14	23
WPG-21	13 - 18	29
WPG-29	18 - 25	37
WPG-36	22 - 32	48
WPG-42	30 - 40	54
WPG-48	42 - 50	60
WPG-63	50 - 60	73
Colour : Light Grey		

End Cap




Ref.No.	Cable Size mm
WEC 1.25	1.25
WEC 2	2
WEC 3.5	3.5
WEC 5.5	5.5
WEC 8	8
WEC 14	14
WEC 22	22
WEC 38	38
WEC 60	60
WEC 80	80
WEC 100	100
WEC 125	125
WEC 150	150
WEC 200	200
WEC 250	250
WEC 325	325
WEC 400	400
WEC 500	500
WEC 630	630
Colour : Red, Yellow, Blue, Black, Green	

Cable Tie

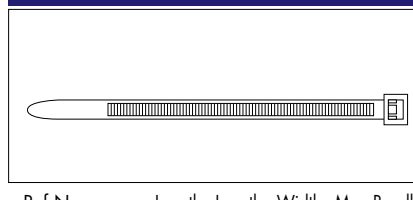

Ref.No.	Length inch	Length mm	Width mm	Max.Bundle Dia mm
WCT 100/25	4	100	2.5	25
WCT 140/36	5 1/2	140	3.6	35
WCT 200/36	8	200	3.6	55
WCT 200/48	8	200	4.8	55
WCT 250/48	10	250	4.8	74
WCT 300/48	12	300	4.8	85
WCT 300/76	12	300	7.6	85
WCT 370/48	14 1/2	370	4.8	102
WCT 370/76	14 1/2	370	7.6	102
WCT 430/48	17	430	4.8	125
WCT 430/90	17	430	9.0	125
WCT 530/90	21	530	9.0	150
WCT 720/90	28	720	9.0	185
WCT 760/90	30	760	9.0	220
WCT 790/90	31	790	9.0	230
Colour : White / Black				


Spiral Band



Ref.No.	Size mm	Width mm
WSB 3	3	4.0
WSB 6	6	7.0
WSB 8	8	10.8
WSB 10	10	11.4
WSB 12	12	13.9
WSB 15	15	15.0
WSB 19	19	18.2
WSB 24	24	19.6
Colour : Natural / Black		
Length : 10m		


WIREMAN® Natural (White) and black colour nylon cable ties made from U.L. approved nylon 66. Normal service temperature range from -40°C to 85°C. Flammability rating : UL 94V-2



Rectangular Telephone Trunking



(Medium Duty)

Ref.No.	W x H mm
WPT 12	50 x 25
WPT 13	75 x 25
WPT 14	100 x 25
Colour : Grey	
Length : 3.65m	

Rectangular Telephone Trunking



(Heavy Duty)

Ref.No.	W x H mm	Thickness mm
WUFD 223	50 x 25	2.3
WUFD 325	75 x 25	2.5
WUFD 427	100 x 25	2.7
Colour : White		
Length : 2.9m		

Rectangular Telephone Trunking - 38mm Height



(Very Heavy Duty)

Ref.No.	W x H mm	Thickness mm
WUFD 232H	50 x 38	3.2
WUFD 332H	75 x 38	3.2
WUFD 432H	100 x 38	3.2
Colour : White		
Length : 2.9m		



Trapezoidal Telephone Trunking


(Very Heavy Duty)


Ref.No.	W x H mm	Thickness mm
WUFDT 225	50 x 25	2.5
WUFDT 332	75 x 25	3.2
WUFDT 432	100 x 25	3.2
Colour : White		
Length : 2.9m		

S - End Bend


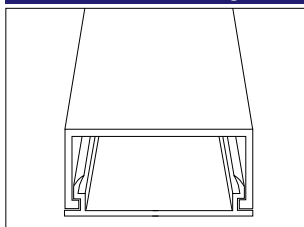
Ref.No.	W x H mm	Thickness mm
WSEB 332	75 x 25	3.2
Colour : White		

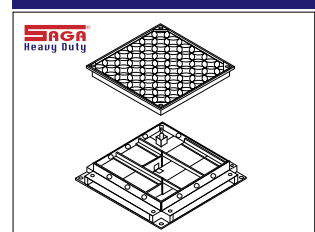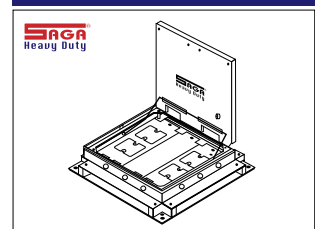Junction Box

Service Box

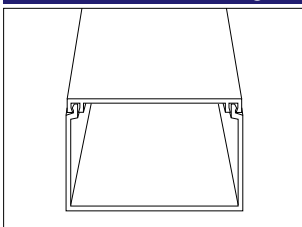
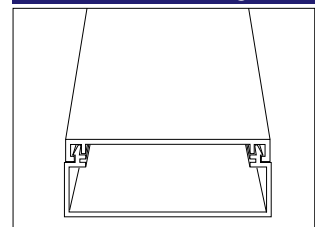
* Please refer to SAGA Catalogue for more details.

Modular Trunking


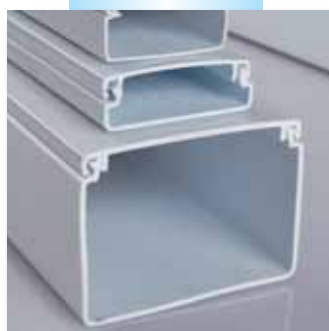
Ref.No.	W x H mm
WMT 3250	50 x 32
WMT 5050	50 x 50
WMT 5075	75 x 50
WMT 50100	100 x 50
WMT 75100	100 x 75
WMT 100100	100 x 100
WMT 100150	150 x 100
WMT 55200	200 x 55
WMT 100200	200 x 100
Colour : White	
Length : 1.83m, 2.00m, 2.44m & upon request	

Mini Trunking


Ref.No.	W x H mm
WMT 1020	20 x 10
WMT 1327	27 x 13
WMT 1330	30 x 13
Colour : White	
Length : 1.83m, 2.00m & upon request	



Mini Trunking


Ref.No.	W x H mm
WMT 1640	40 x 16
WMT 2040	40 x 20
WMT 1650	50 x 16
Colour : White	
Length : 1.83m, 2.00m & upon request	



WIREMAN® uPVC Modular Trunking and Mini Trunking are manufactured from specially formulated polyvinyl chloride in strict accordance to meet the requirement of BS 4678 Pt.4. It offers a complete range for the routing of surface mounted cabling in domestic and commercial premises.


Watertight Flexible Conduit (EF Type)

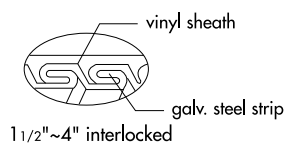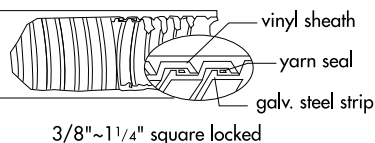

Ref.No.	Size inch	Vinyl Sheath Thickness mm	Min. Bending Radius mm	Coil/m
WBA 206703	3/8	1.0	60	50
WBA 206704	1/2	1.0	80	50
WBA 206706	3/4	1.0	100	30
WBA 206710	1	1.0	150	30
WBA 206712	1-1/4	1.5	180	20
WBA 206714	1-1/2	1.5	220	20
WBA 206720	2	1.5	250	15
WBA 206724	2-1/2	2.0	300	10
WBA 206730	3	2.0	450	10
WBA 206740	4	2.0	600	5


- Galvanized steel core, with flame retardant PVC coated.
- High flexibility, absolutely moisture-proof.
- Absorbs motion, vibration and bending indefinitely.
- Cord packing size form 3/8" through 1-1/4" by squarelocked. 1-1/2" through 4" by interlocked.
- Temperature range from - 10 °C ~ +70 °C.
- IP66 Dust / weatherproof.

Watertight 90° Elbow Adaptor

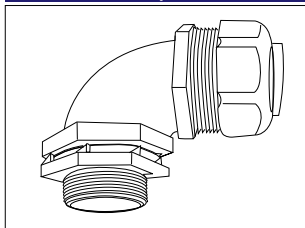

Ref.No.	Size inch	Thread
WBL 210103	3/8	NPT
WBL 210104	1/2	NPT
WBL 210106	3/4	NPT
WBL 210110	1	NPT
WBL 210112	1 1/4	NPT
WBL 210114	1 1/2	NPT
WBL 210120	2	NPT
WBL 210124	2 1/2	NPT
WBL 210130	3	NPT
WBL 210140	4	NPT

Watertight Straight Adaptor



Ref.No.	Size inch	Thread
WBB 210103	3/8	mm/NPT
WBB 210104	1/2	mm/NPT
WBB 210106	3/4	mm/NPT
WBB 210110	1	mm/NPT
WBB 210112	1 1/4	NPT
WBB 210114	1 1/2	NPT
WBB 210120	2	NPT
WBB 210124	2 1/2	NPT
WBB 210130	3	NPT
WBB 210140	4	NPT



MEGAPOWER MANUFACTURING (M) SDN BHD (543319-X)

Lot 1888, Jalan KPB 7, Kawasan Perindustrian Balakong, Bukit Belimbing, 43300 Seri Kembangan, Selangor D.E, Malaysia.
Tel: (6) 03-8962 3333 Fax: (6) 03-8962 2266 E-mail: enquiries@megapower.net.my Home page: www.megapower.net.my