




### 1. USE

Cable for high-speed VDI transmission networks

### 2. DESCRIPTION

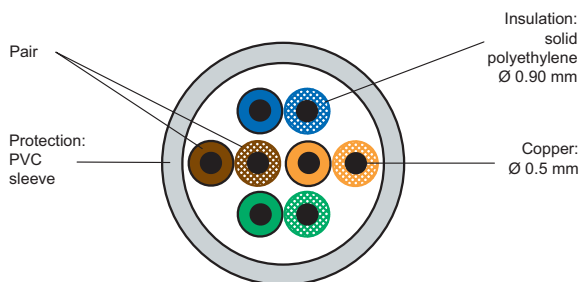

### 3. MARKING AND PACKAGING

Marking of Legrand cables

- LEGRAND
- Catalogue number
- Number of pairs
- Gauge
- Type
- Impedance
- Type of sleeve
- Category
- Conformity to standards
- Batch number
- Measurement (remaining length in metres).
- EUROCLASS Eca
- Velocity of propagation

### 4. PERFORMANCE AT 500 MHZ (STAND. ANSI/TIA 568-C.2)

Catalogue number	0 327 51 - 0 328 74
Maximum attenuation (dB/100 m)	22
Minimum NEXT (dB)	35,3
PS NEXT (dB)	32,3
ACRF (dB / 100 m)	23,8
PS ACRF (dB / 100 m)	20,8
Return Loss (dB)	20,1

### 5. TECHNICAL AND MECHANICAL FEATURES

Catalogue number	0 327 51	0 328 74
Type	U/UTP	U/UTP
Type of sleeve	PVC	PVC
Number of pairs	4	4
Assembly	Pairs	Pairs
Diameter over insulation (mm)	0,89±0,01	
Cable diameter (mm)	4,9 ± 0,1	
Weight of cable (kg/km)	28 to 32	35
Min. bending radius when laying (mm)	20	20
AWG gauge	24	24

**6. ELECTRICAL FEATURES AT 20°C**

Catalogue number	0 327 51 - 0 328 74
Type	U/UTP
Maximum linear resistance (ohm/km)	95 *
DC dielectric strength	1 KV / 1 min *
Minimum insulation resistance (Mohm.km)	5000
Minimum propagation speed	66 %
Characteristic impedance at 100 MHz	100 ±5Ω

\* According to standard IEC 61156-5

**7. ORDERING INFORMATION**

Catalogue number	0 327 51	0 328 74
Type	U/UTP	
Colour	Grey RAL 7035	
Pack (m)	305	1000
Packaging	Box	Reel

**8. ENVIRONMENTAL FEATURES**

Transport temperature: 0 à + 50 °C

Storage temperature before use: 10°C during 24h (if stock ≤ 5°C )

Usage temperature: - 20 à + 60 °C

Fire rating :

IEC 60332-1-2, EN 60332-1-2

EUROCLASS EN 13501-6 = Class Eca

**9. STANDARDS AND APPROVALS**

Cat 5e, 100 MHz

ANSI/TIA 568-C.2

EN 50173-1

EN 50288-3-1

ISO/IEC 11801 (ed. 2.2)

IEC 61156-5