


ELOÉ™

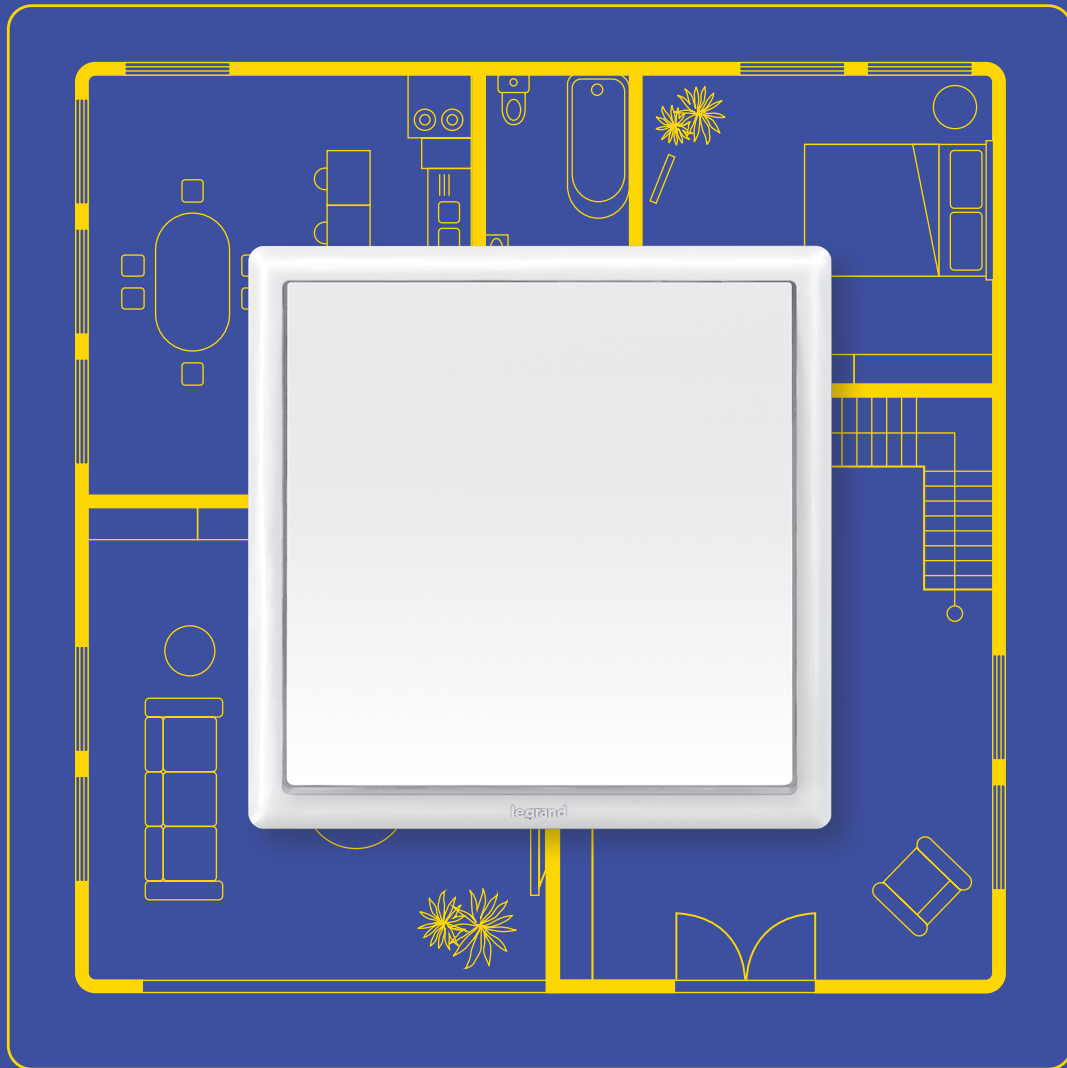

Everything just **ADDS** up

THE **GLOBAL SPECIALIST**
IN ELECTRICAL AND DIGITAL BUILDING INFRASTRUCTURES


 **legrand**®

ELOÉ™

When you choose **ELOÉ™** for your project, you are not just choosing a modern design and versatile functions, you are also opting for easy installation – and better value. **ELOÉ™** adds to your winning formula.

CONTENTS


02	ADD DETAILS that matter	08	Catalogue pages
04	ADD VALUE to your productivity		
06	ADD POSSIBILITIES to projects		

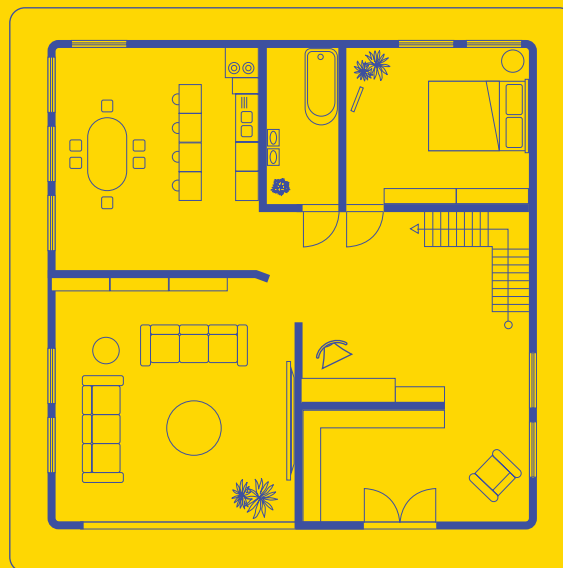

Everything just
ADDS up

ADD DETAILS that matter

Good design doesn't always have to be complex. With **ELOÉ™**, it combines details that make sense and add to the overall experience – for both users and installers.

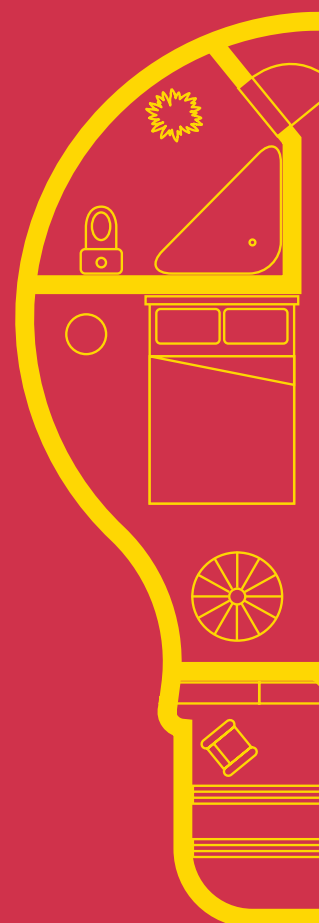

LARGE ROCKER
Ergonomically designed for a great user experience



GLOSSY FINISH
Smooth glossy surface makes cleaning fuss-free.




COMPLIANT WITH STANDARDS
ELOÉ™ is designed to meet international standards – IEC and BS.



SUBTLE CURVES
Rounded corners and curves add a touch of elegance.



STRONG PROFILE
Clean lines and a distinct shape enhance the visual appeal of **ELOÉ™**.

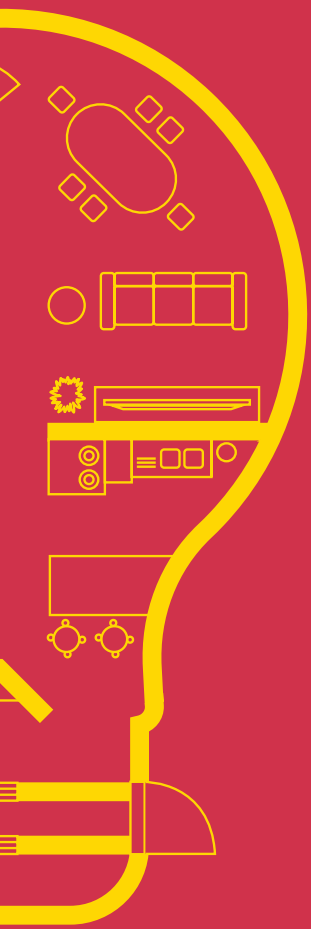

Superior design and quality




DESIGNED TO LAST
Even the concealed functional parts have been carefully designed.



ADD VALUE

to your productivity


No matter how unpredictable the conditions at your worksite may be, **ELOÉ™** takes the uncertainty out of your project by making every installation simple, fuss-free, safe, on time – and on budget.

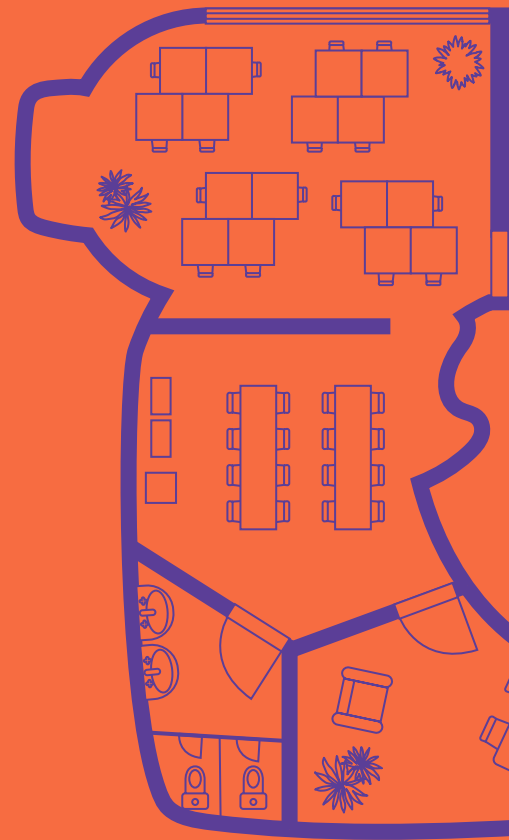

TIME SAVING
Large terminal capacity allows for quick and easy wiring and connection to multiple outlets.




ROBUSTNESS
Ribbs make the switch sturdy.



UNIVERSAL SCREW HEADS

For both wiring and adjusting **ELOÉ™**, you need only one screwdriver head to get the installation done.

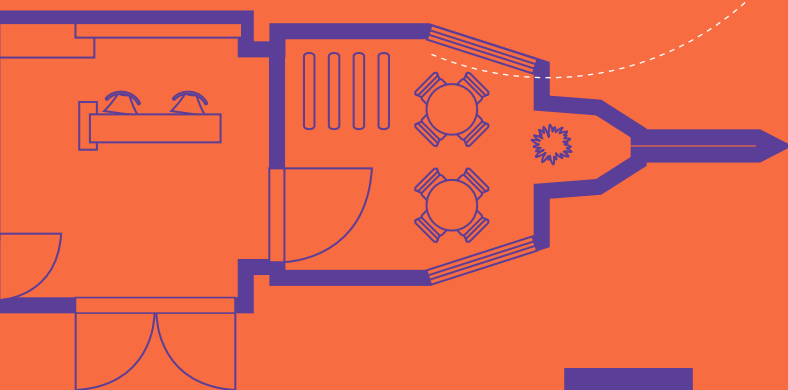

Easy installation



FLEXIBILITY
Oblong shaped holes ensure flexibility for easy adjustment when the switch is not straight.



EASY TO ORDER

1 catalogue number = 1 complete product




SAFE AND FAST INSTALLATION

No access to metal parts ensures your safety during installation. The one-piece plate/mechanism also means that installation can be completed in three simple steps.

ADD POSSIBILITIES to projects

Whether you are working on an integrated development or a straightforward build, **ELOÉ™** provides the functions you need.

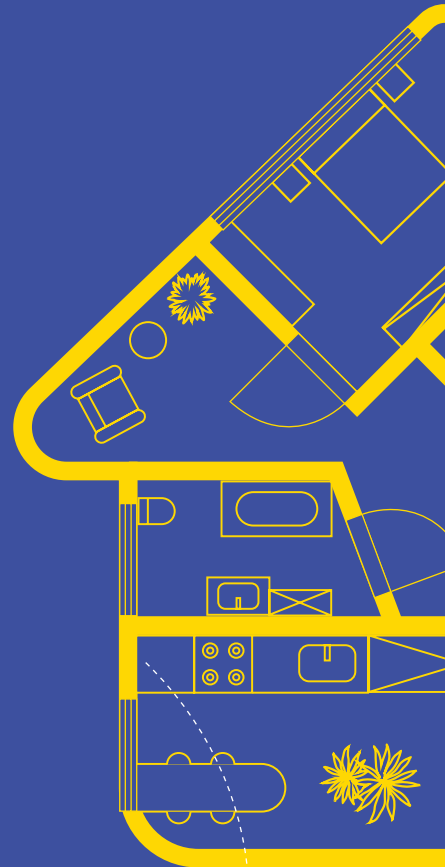

**UNIVERSAL DIMMER SUITABLE
FOR ALL MODERN LOADS**



Dimmable
LEDs



Dimmable
compact
fluorescent lamps



Incandescent
and halogen
lamps



Halogen lamps
with electronic
or ferromagnetic
transformer



4-gang switch




**1-gang British standard
switched 13A socket with
USB Type-A charger**



The splash-proof cover allows a 1-gang **ELOÉ™** mechanism to be installed in outdoor environments. It also ensures protection against dust. With plug engaged, IP55 protection is maintained.


1-gang British standard 13A socket with USB Type-A charger and IP55 cover

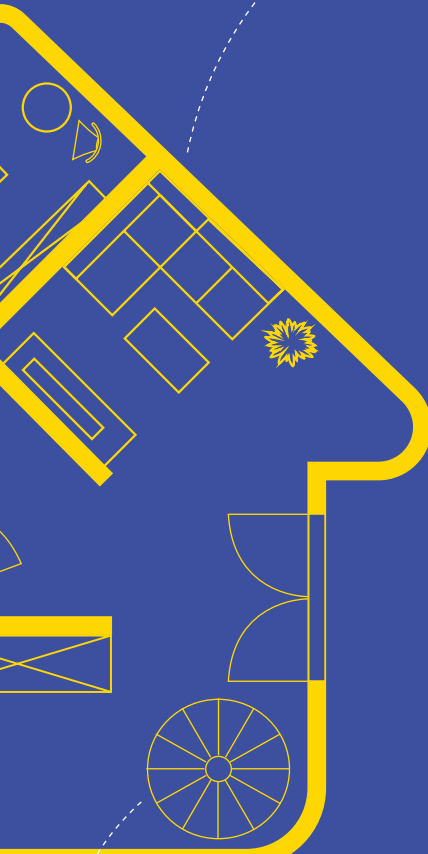

Versatility for modern living



2-gang British standard switched 13A socket with USB Type-A & Type-C dual charger

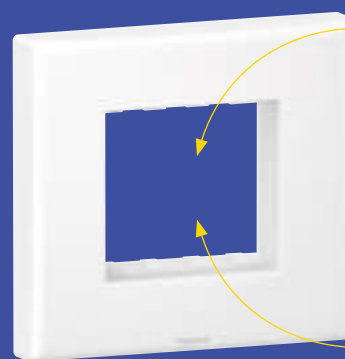

Adapter for Arteor mechanism



Electronic room thermostat



HDMI socket



There is no settling for less. **ELOÉ™** works both independently and with the Arteor range. The Arteor adapter offers versatility for your every need – residential, commercial and hospitality projects.



6 180 01



6 180 05



6 180 07



6 180 11



6 180 15

Conform to BS EN 60669-1
 Material: Thermoplastic with glossy finish
 Dimensions: 86 x 86 x 9.5 mm (1-gang) / 86 x 146 x 9.5 mm (2-gang)
 Supplied with 2 screws M3.5 for BS boxes

Single pole switches 16 AX - 250 V~

Pack	Cat.Nos	Single pole switches 16 AX - 250 V~
10	6 180 00	1-gang 1-way switch ○ White
10	6 180 01	1-gang 2-way switch ○ White
10	6 180 02	2-gang 1-way switch ○ White
10	6 180 03	2-gang 2-way switch ○ White
10	6 180 04	3-gang 1-way switch ○ White
10	6 180 05	3-gang 2-way switch ○ White
10	6 180 06	4-gang 1-way switch ○ White
10	6 180 07	4-gang 2-way switch ○ White
10	6 180 09	Intermediate switch ○ White

Push-buttons 6 A - 250 V~

Pack	Cat.Nos	Push-buttons 6 A - 250 V~
10	6 180 11	Bell push ○ White
10	6 180 15	2-gang ○ White

ELOÉ™

double pole switches



6 180 71



6 180 74



6 180 76

Material: Thermoplastic with glossy finish
 Dimensions: 86 x 86 x 9.5 mm (1-gang) / 86 x 146 x 9.5 mm (2-gang)
 Supplied with 2 screws M3.5 for BS boxes

Pack	Cat.Nos	Double pole switches 20 A - 250 V~
10	6 180 70	1-gang 1-way switch + red neon indicator ○ White
10	6 180 71	1-gang 1-way switch + red neon indicator + 1 earth connection ○ White
10	6 180 89	1-gang 2-way switch + red neon indicator + 1 earth connection ○ White

Pack	Cat.Nos	Double pole switches 32 A - 250 V~
10	6 180 74	1-gang 1-way switch + red neon indicator ○ White

Pack	Cat.Nos	Double pole switches 45 A - 250 V~
10	6 180 76	1-gang 1-way switch + red neon indicator ○ White



ELOÉ™

dimmers



6 180 35

Material: Thermoplastic with glossy finish
 Dimensions: 86 x 86 x 9.5 mm (1-gang)
 Supplied with 2 screws M3.5 for BS boxes

Pack	Cat.Nos	Dimmers
1	6 180 31	500 W RL dimmer Push on/off and rotary dimmer - 50/60 Hz 1-gang 2-way : - 60-500W (230 V) for halogen lamps with electronic transformer with leading edge behaviour ○ White 
1	6 180 35	200W LED + 300W Incandescent Rotary dimmer For all types of lamps: - dimmable LEDs: 5 W to 200 W (10 lamps max. 5 W to 37 W (100 V)) - dimmable compact fluorescent lamps: 5 W to 75 W (10 lamps max. 5 W to 37 W (100 V)) - halogen with ferromagnetic or electronic transformer: 5 VA to 300 VA / 5 VA to 150 VA (100 V) - fluorescent tube - ballast: 5 VA to 300 VA / 5 VA to 150 VA (100 V) - halogen and incandescent 240 V 5 W to 300 W / 5 W to 150 W (100 V) When switched on, gradually (2 seconds) lights up at the level set before last switch-off ○ White 

ELOÉ™

television, telephone and data sockets



6 180 26










6 180 32



6 180 92

Material: Thermoplastic with glossy finish
 Dimensions: 86 x 86 x 9.5 mm (1-gang)
 Supplied with 2 screws M3.5 for BS boxes

Pack	Cat.Nos	Television sockets
10	6 180 27	Single TV socket, female ○ White 
10	6 180 26	Single TV socket, F-type ○ White 
5	6 180 32	TV-R-SAT socket ○ White 
Pack	Cat.Nos	Telephone sockets
10	6 180 97	RJ 11 socket ○ White 
Pack	Cat.Nos	Data sockets
10	6 180 93	RJ 45 Cat.5 UTP ○ White 
10	6 180 91	RJ 45 Cat.6 UTP ○ White 
10	6 180 92	Double RJ 45 Cat.6 UTP ○ White 

ELOÉ™

socket outlets



6 180 41

6 180 58

Material: Thermoplastic with glossy finish
 Dimensions: 86 x 86 x 9.5 mm (1-gang) / 86 x 146 x 9.5 mm (2-gang).
 Supplied with 2 screws M3.5 for BS boxes

Pack	Cat.Nos	British Standard socket outlets 13 A - 250 V~
10	6 180 41	Conform to BS 1363-2 1-gang single pole switched <input type="radio"/> White
5	6 180 46	2-gang single pole switched <input type="radio"/> White
1	6 180 58	British Standard socket outlets 13 A - 250 V~ with USB charger Conform to BS 1363-2 Conform to IEC 60950-1 1-gang single pole switched with USB Type-A 3 A - 5 V _{DC} 15 W Consumption in passive mode < 0.08 W <input type="radio"/> White
10	6 180 51	British Standard socket outlets 15 A - 250 V~ Conform to BS 546 1-gang single pole switched <input type="radio"/> White
10	6 180 67	Multistandard switched socket outlet 15 A 127 V~ / 16 A 250 V~ 1-gang <input type="radio"/> White

ELOÉ™

cable outlets and accessories



6 180 85

6 180 37 + 5 720 72

6 176 36 + 6 180 58

Material: Thermoplastic with glossy finish
 Dimensions: 86 x 86 x 9.5 mm (1-gang) / 86 x 146 x 9.5 mm (2-gang)
 Supplied with 2 screws M3.5 for BS boxes

Pack	Cat.Nos	Cable outlets
10	6 180 85	Conform to BS 5733 20 A - 250 V~ <input type="radio"/> White
10	6 180 37	Arteor adaptor Allows the integration of 2-module Arteor mechanisms such as R.C.B.O., automatic switch, skirting light, USB charger, etc 1-gang <input type="radio"/> White
4	6 176 36	Fixing accessories Splash-proof cover Mainly for socket protection IP 55 with or without plug engaged Space inside : 86 x 86 mm External dimensions : 129,2 x 107,2 x 54,1 mm <input checked="" type="radio"/> Mist grey



For integration of Arteor functions, see **Arteor offer**







LEGRAND GROUP BRANDS (M) SDN. BHD. (544761-T)
(Formerly known as Megapower Legrand (M) Sdn. Bhd.)

Lot 1888, Jalan KPB 7,
Kawasan Perindustrian Balakong,
Bukit Belimbing, 43300 Seri Kembangan,
Selangor Darul Ehsan, Malaysia.

Tel : +60 (3) 8962 3333
Fax: +60 (3) 8962 2211
Email: enquiries.malaysia@legrand.com

FOLLOW US ON:

-  legrand.com.my
-  youtube.com/user/legrand
-  facebook.com/LegrandMalaysia
-  linkedin.com/company/legrandmalaysia