

SMART CHOICE FOR A CONVENIENT LIFE

Honeywell MK Wired Door
Chimes bring peace of
mind to your doorstep.

Wired Chimes



Honeywell






A FAMILIAR SOUND IS HARD TO MISS

Honeywell MK wired door chimes feature a sleek design, and crystal-clear tunes that feel like home. Compatible with all standard bell switch and door push devices, our chimes are easy to install and to upgrade.

Their modern aesthetics make the wired door chimes seamlessly blend in with any décor. And you'll never have to worry about maintenance.

Installation is easy. A screwless terminal accommodates one wire and uses double insulation (CLASS II Construction) to protect against electric discharges to ensure your safety.

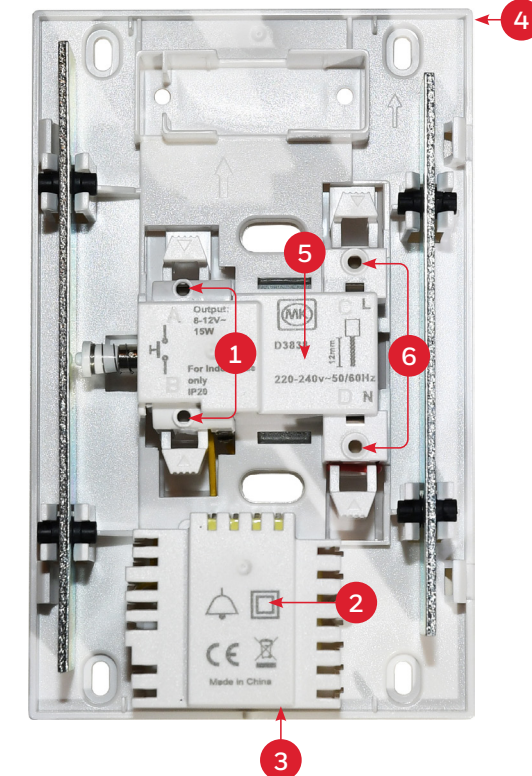

1. Clamping Terminal (Bell Switch)
2. Class II Construction
3. Isolation Transformer
4. Compatible Footprint Dimensions to All MK Door Chimes
5. Clear Laser-marked Terminals Marking & Product Marking
6. Clamping Terminal (Input Power) Up to 1x2.5mm² Wire



SLEEK AND SIMPLE

Modern aesthetics and technology blend together in a maintenance-free device that suits your lifestyle and décor.



SAFE AND RELIABLE

With compliance to product safety IEC 60335-1 and IEC 61558-1/2-8, our isolation transformer-based design which provides reliable CLASS II construction is the safe choice.



EASY SETUP & UPGRADE

Our intuitive, clearly marked terminal makes it simple to install. Honeywell door chimes use enhanced clamping to eliminate failure risks. And the footprint is backward compatible, guaranteeing easy future upgrades.



WIRED DOOR CHIME WITH BUILT-IN TRANSFORMER



Wired Chimes 240V
List No: D3838

Features

- Wired Electromechanical Door Chime with built-in transformer.
- Sound level is approximately 80 dBA at 1 meter.
- Compatible with bell switch/normal door push and Illuminated door push*.
- Screwless terminal for quick wiring installation.
- Fixing screws and wall plugs are supplied with the door chime.

TECHNICAL SPECIFICATION

ELECTRICAL			DIMENSIONS: (IN MM)	
Supply Voltage Rating	220-240V~ 50Hz/60Hz			
Terminal Capacity	1 x 0.75 to 2.5mm ² (solid or stranded)			
Output Voltage	8-12V~			
Output Current	800mA (max)			
PHYSICAL				
Ambient Operating Temperature	0 °C to +50 °C			
Insulation class	Double Insulation			
IP Rating	IP20			
STANDARDS AND APPROVALS				
Reference Standard Specification	IEC 60335-1	IEC 61558-1/2-8		
CE mark	Yes			
MOUNTING FIXING KIT				
Screw: 4 x 3.0 x 35mm Wall Plug: 4 x Ø6 x 30mm				

*NOTE: Check the door push rating before connecting to Door Chime.

For more information

Email: Buildings.ASEAN@Honeywell.com

www.honeywell.com

Malaysia (ASEAN Headquarters)

Honeywell International Sdn. Bhd.
Level 25, UOA Corp Tower B, Avenue 10
The Vertical, Bangsar South City,
59200, Kuala Lumpur, Malaysia

Indonesia

PT. Honeywell Indonesia
Menara Prima, 23rd Floor
Jl. DR. Ide Anak Agung Gde Agung Blok 6.2
Kawasan Mega Kuningan, Jakarta 12950, Indonesia

Philippines

Honeywell International Philippines Inc.
25th Floor The Curve BGC
32nd corner 3rd Avenue
Bonifacio Global City, Taguig City
Philippines 1634

Singapore

Honeywell Pte. Ltd.
17 Changi Business Park Central 1
Honeywell Building, Singapore 486073

Thailand

Honeywell Systems (Thailand) Ltd.
252/121 25th Floor
Muang Thai-Phatra office Tower II
Ratchadapisek Road, Huay Khwang
Bangkok 10320, Thailand

Vietnam

Honeywell Vietnam Co.,Ltd.
Suite 1406-1408, Level 14,
Pacific Place Building,
83B Ly Thuong Kiet, Hoan Kiem
District, Hanoi, Vietnam

Honeywell Vietnam Co.,Ltd.
Suite 11, 5th Floor, Crescent Plaza,
105 Ton Dat Tien Street, Tan Phu Ward
District 7, HCMC, Vietnam

Honeywell

