

OPT HAND CRIMPING TOOLS

For Insulated Terminal & Connector

Ratchet type.

Model	Crimping Range (mm ²)	Weight (kg)	Length (mm)
TOPT-LY-03C	0.5 - 6	0.6	230
TOPT-ANB-03C	0.5 - 6	0.6	230
TOPT-FN-03C	0.5 - 6	0.6	230



TOPT-LY-03C

● R: 0.5-1.5mm² AWG20-16
 ● B: 2.5mm² AWG14
 ● Y: 4-6mm² AWG12-10



TOPT-ANB-03C



TOPT-FN-03C

For Multipurpose Application (Pre-order)

Tool Set of TOPT-LY-03C plus 4 additional dies.

Model	Crimping Dies Model	Crimping Range (mm ²)
TOPT-LY-03C-5D	Dies (TOPT-LY-03C) For Insulated Terminal & Connector	0.5 - 6
	Dies (TOPT-LY-03B) For Non-insulated Receptacle & Tab Terminal	0.5 - 6
	Dies (TOPT-LY-04WF) Dies (TOPT-LY-16WF) For Wire Ferrules & End Sleeves	0.5 - 4 6 - 16
	Dies (TOPT-LY-10) For Non-insulated Terminal	1.5 - 10



TOPT-LY-03C-5D

For Non-Insulated Receptable & Tab Terminal

Ratchet type.

Tab Width = 6.3mm

Model	Crimping Range (mm ²)	Weight (kg)	Length (mm)
TOPT-LY-03B	0.5 - 6	0.6	230



TOPT-LY-03B

OPT HAND CRIMPING TOOLS

For Open Barrel Terminal & Non-insulated Receptable Tab Terminal

Model	Tab Width (mm)	Crimping Range (mm ²)	Weight (kg)	Length (mm)
TOPT-SN-28B	2.8	0.25 - 1	0.35	190



TOPT-SN-28B

For Cable Lug / Non-insulated Terminal

Ratchet type. PVC handle. Smart open-knob.

Model	Crimping Range (mm ²)	Weight (kg)	Length (mm)
TOPT-KH-6	0.75 - 6	0.23	195
TOPT-KH-8	1.5 - 10	0.6	250
TOPT-KH-16	1.5 - 16	0.6	280
TOPT-KH-22	6 - 25	0.92	365
TOPT-KH-38	6 - 35	0.92	365



TOPT-KH-6



TOPT-KH-16



TOPT-KH-8



TOPT-KH-22 & TOPT-KH-38

For Copper Cable Lug and Link

With Non-ratchet Adjusting Screw.

Indent Crimping.

Model	Crimping Range (mm ²)	Weight (kg)	Length (mm)
TOPT-KH-120	10 - 95	2.8	558
TOPT-KH-150	10 - 120	3.5	595



TOPT-KH-120



TOPT-KH-150

OPT HAND CRIMPING TOOLS

For Wire Ferrule & End Sleeve

Ratchet type.

Model	Crimping Range (mm ²)	Weight (kg)	Length (mm)
TOPT-LY-06WF	0.5 - 6	0.6	230
TOPT-LY-16WF	6 - 16	0.6	230
TOPT-LY-35WF	10 - 35	0.6	240
TOPT-LY-50WF	25 - 50	0.6	240



TOPT-LY-06WF



TOPT-LY-16WF



TOPT-LY-35WF



TOPT-LY-50WF

For Wire Ferrule & End Sleeve

Ratchet type. Premium handle.

Model	Crimping Range (mm ²)	Weight (kg)	Length (mm)
TOPT-ANB-06WF	0.5 - 6	0.6	230
TOPT-FN-06WF	0.5 - 6	0.6	230
TOPT-FN-35WF	10 - 35	0.6	240
TOPT-SN-06WF	0.25 - 6	0.35	190



TOPT-ANB-06WF



TOPT-FN-06WF



TOPT-FN-35WF



TOPT-SN-06WF



TOPT-KH-35WF



TOPT-KH-95WF



TOPT-KH-55WF

For Wire Ferrule & End Sleeve

Ratchet type. PVC handle. Smart open-knob.

Model	Crimping Range (mm ²)	Weight (kg)	Length (mm)
TOPT-KH-35WF	10 - 35	0.64	280
TOPT-KH-95WF	50 - 95	0.76	330
TOPT-KH-55WF	10 - 50	0.76	330

OPT HAND CRIMPING TOOLS

For Wire Ferrule & End Sleeve

Ratchet labor-saving type, Die-less square crimping,
Serrated surface created on ferrules,
Ergonomic double color handles.

Model	Crimping Range (mm ²)	Weight (kg)	Length (mm)
TOPT-DL-10A	0.08 - 10	0.6	185
TOPT-DL-16A	0.5 - 16	0.6	185



TOPT-DL-10A




TOPT-DL-16A

For Close End Terminal

Oval Shape Crimping,

Model	Crimping Range (mm ²)	Weight (kg)	Length (mm)
TOPT-FN-13C	0.5 - 6	0.6	230

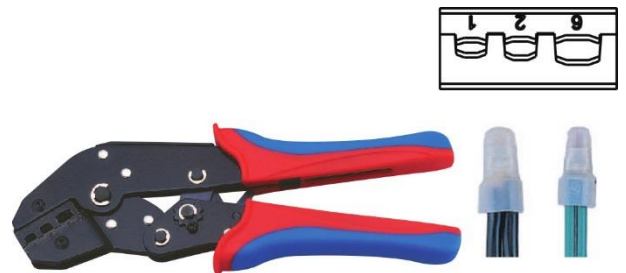

TOPT-FN-13C