

MEDIUM VOLTAGE CABLE LUG FOR COPPER CONDUCTOR

CRIMP TYPE FOR HEXAGON AND INDENT DIE


HIGH CONDUCTIVITY COPPER: 99% I.A.C.S

COPPER PURITY: 99.9%

FINISHING: TIN PLATED

CORONA RELIEF TAPER END FOR APPLICATION UP TO 33KV


“COPPER TUBE COMPLIANT TO MS 1540:2002”

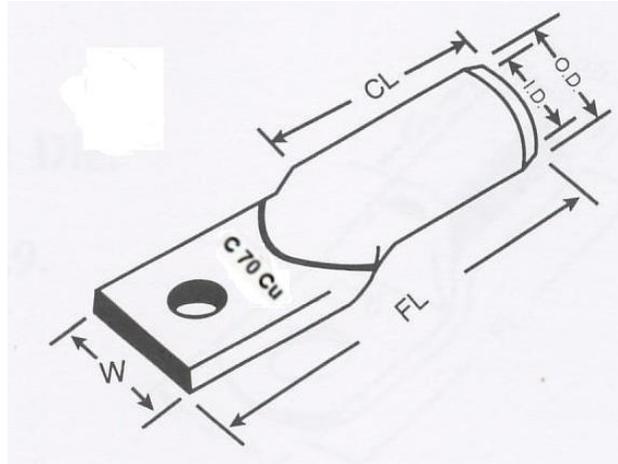

Conductor Size – Stud Hole	FL	CL	OD	ID	W	Crimping Tool	Hexagon Die A/F	No. Of Crimps
50mm ² – M10	55	22	12.5	9.5	18.0	CP-240	10.4	1
70mm ² – M12	63	25	14.4	11.2	20.5	CP-240	11.5	1
95mm ² – M12	66	25	17.5	13.5	25.0	CP-240	14.2	1
120mm ² – M12	73	27	20.0	15.6	28.0	CP-240	16.5	2
150mm ² – M16	78	30	22.0	16.8	31.5	CP-240	18.3	2
185mm ² – M16	82	32	24.0	19.0	35.0	CP-240/ CP-630	20.0	2/ 1
240mm ² – M16	115	50	27.9	21.5	40.0	CP-240/ CP-630	23.1	3/ 2
300mm ² – M16	121	50	31.8	24.4	45.0	CP-630	26.5	2
400mm ² – M16	139	60	34.4	26.7	50.0	CP-630	28.1	2
500mm ² – M20	158	65	38.6	30.0	55.0	CP-630	31.0	3
630mm ² – M20	161	65	44.7	34.5	64.0	CP-630	37.0	3

* All dimensions in m.m.

* Other dimension on request



CONWAY TERMINALS MANUFACTURER SDN. BHD. (No. Syarikat 049613 U)

[\[MAIN MENU\]](#)

MEDIUM VOLTAGE CABLE LINK FOR COPPER CONDUCTOR

CRIMP TYPE FOR HEXAGON AND INDENT DIE


HIGH CONDUCTIVITY COPPER: 99% I.A.C.S

COPPER PURITY: 99.9%

FINISHING: TIN PLATED

CORONA RELIEF TAPER END FOR APPLICATION UP TO 33KV


“COPPER TUBE COMPLIANT TO MS 1779:2005”

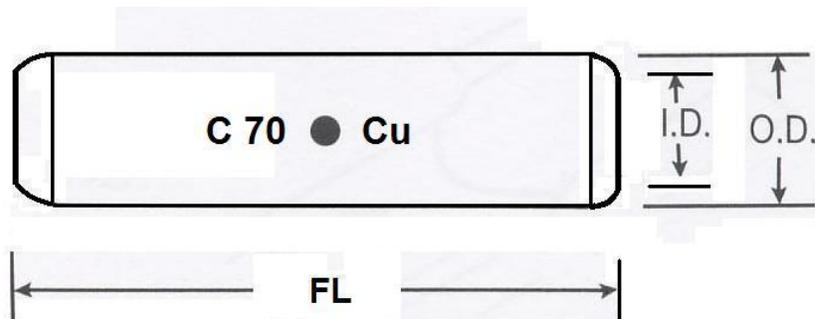

Conductor Size	FL	OD	ID	Crimping Tool	Hexagon Die A/F	No. Of Crimps
50mm ²	44	12.5	9.5	CP-240	10.4	1
70mm ²	49	14.4	11.2	CP-240	11.5	1
95mm ²	54	17.5	13.5	CP-240	14.2	1
120mm ²	58	20.0	15.6	CP-240	16.5	2
150mm ²	68	22.0	16.8	CP-240	18.3	2
185mm ²	70	24.0	19.0	CP-240/ CP-630	20.0	2/ 1
240mm ²	100	27.9	21.5	CP-240/ CP-630	23.1	3/ 2
300mm ²	110	31.8	24.4	CP-630	26.5	2
400mm ²	120	34.4	26.7	CP-630	28.1	2
500mm ²	125	38.6	30.0	CP-630	31.0	3
630mm ²	135	44.7	34.5	CP-630	37.0	3
800mm ²	160	50.6	39.0	CO-800	41.5	3
1000mm ²	170	56.2	43.0	CO-1000	46.0	3

* All dimensions in m.m.

* Other dimension on request



CONWAY TERMINALS MANUFACTURER SDN. BHD. (No. Syarikat 049613 U)

[\[MAIN MENU\]](#)