



EM-11PC & EM-11RP

HIGH EFFICIENCY


ENERGY CONSERVING EMERGENCY LIGHTING LUMINAIRE

Technical Data

Mode of Operation	: Non-Maintained.
Input Voltage	: 240V \pm 10%, 50Hz
Battery	: Hi-Temp. Nickel Cadmium Battery.
Charging Current	: 120mA (Nominal).
Lamp Used	: 1 x 8 Watt Fluorescent Tube.
Operating Temperature	: 0°C to 60°C
Charger	: Fully Automatic Constant Current. Solid-State Electronics Provide High Reliability with Trickle Charge-Facility.
Indication	: Red L.E.D. "On" Indicates Charging. Equipped with Push Test-Switch to Simulate Power Failure.
Backup Time	: 3 Hours Duration.
Construction (EM-11PC)	: Injection Moulded Fire-Retardant ABS Polyester Base with Side Knockout Cable Entry. Injection Moulded Fire-Retardant Polycarbonate Gear Tray and Acrylic Diffuser.
(EM-11RP)	: Injection Moulded Fire-Retardant ABS Polyester Base with Side Knockout Cable Entry. Injection Moulded Fire-Retardant Polycarbonate Gear Tray and Polystyrene Prismatic Diffuser.
Weight	: EM-11PC \pm 0.8kg / EM-11RP \pm 1.0kg
#Warranty	: 5 Years.
Compliance	: Malaysia Standards MS-619, IP-20.

Dimension in mm
Tolerance: \pm 0.03 mm

Surface Mounting

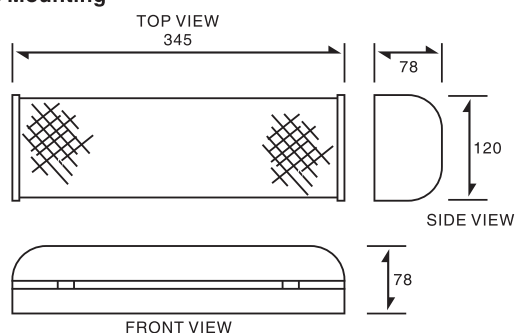

Recessed Mounting

